

2026 HANKOOK TIRE


PRODUCT CATALOG

Passenger and Light Truck Tires

United States of America



Official Tire Partner



hankooktire.com



Official Tire Partner



Contents

About Hankook

Hankook Overview	4
Motorsports	6
OE Supply	8
SureTire Plan	14

Consumer

SUV / 4X4

Dynapro	16
---------	----

CAR / SUV

iON	50
Ventus	74
Kinergy	92
Weatherflex	114

Winter

Winter i*cept	120
Winter i*pike	128

Commercial

Van

Vantra	136
--------	-----


Leading Global Tire Company, Hankook Tire

Hankook Tire & Technology Overview

Hankook Tire is a global corporation that has consistently met the challenges of the future, always a step ahead of changes in the world economy. We have anticipated and prepared for what lies ahead, taking the lead in fostering new growth when important opportunities arise.

Our sales network spans across China, Europe, the Americas, Asia Pacific, and the Middle East & Africa as well as Korea where our headquarters is located in order to ensure that our products satisfy local customer needs.

 CEO Jongseon Ahn, Sanghoon Lee	 Products Tyres for passenger vehicles, SUV, Trucks and Buses	 Global Ranking in Tire Sales 7 th	 Global Sales Revenue (2025) USD 7.3 Billion
 Production Capacity 100 Million Units	 Global Corporate Organisation 7 regional headquarters 5 R&D centers 8 manufacturing plants 39 local subsidiaries	 Number of Selling Countries Approximately 160 countries	 Number of Employees Approximately 22,000

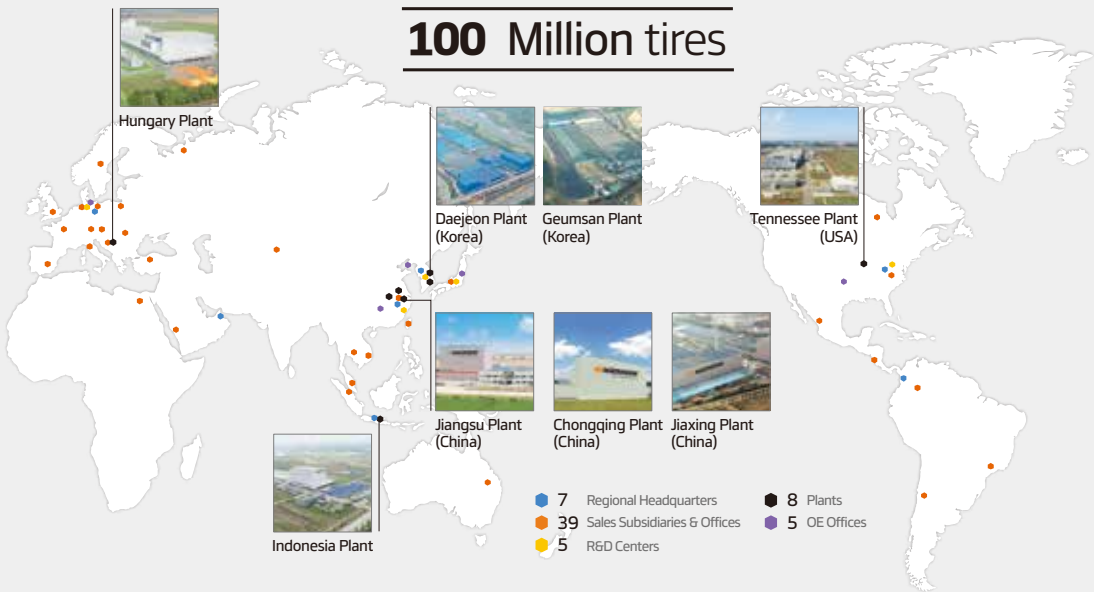

Hankook Tire's Global R&D Center

Technoplex



Hankook Technoplex is the corporate headquarters of Hankook Tire & Technology, located in Pangyo Techno Valley, Gyeonggi-do, South Korea. Standing on a 5,461m² lot area with 6 floors below ground and 10 floors above ground making up a total of 45,919m² gross floor area, the building serves as the foundation for the company's growth strategy and culture. As Hankook's second project with the world-renowned architecture firm Foster+Partners founded by Sir Norman Foster, it features flexible and open workspaces to nurture a challenging spirit and innovation, connect employees, and further support its proactive culture.

Technodome



Hankook's high-tech R&D center, Technodome, stands on a massive footprint of 70,288m² of lot area with a 96,347m² gross floor area in Daedeok Innopolis, Daejeon, Korea. A high-tech R&D center that oversees four global research institutes in the U.S., Germany, China, and Japan, the Technodome serves as a symbol of Hankook Tire's innovation, developing proprietary technology and strengthening future advancements based on traditional and applied research. The "glocalization" (Globalization + Localization) strategy implemented through the cooperation of global research institutes worldwide allows Hankook Tire to lead future tire technology development while sustaining superior quality.

Technoring



Located in Taejeon-gun, Chungcheongnam-do, South Korea, Hankook Technoring has a site area of 1.26 million square meters (as large as 125 football fields combined), featuring one of the largest and the longest tire test track in Asia and comprising 13 independent testing roads. The proving ground is equipped with office buildings, workshops, a gas station, and electric vehicle charging stations that accommodate all types of vehicles including passenger cars, trucks and buses. Its scale and state-of-the-art facilities meet the demanding requirements of global premium carmakers.

Hankook Motorsports

Hankook

Hankook manufactures globally innovative, award winning radial tires of proven superior quality for passenger cars, light trucks, SUVs, RVs, trucks, and buses as well as motorsports (circuit racing/rallies). Aspiring to bring consumers the most superior product quality, technological excellence and driving satisfaction, Hankook continuously invests in research and development maintaining five R&D centers and eight production facilities around the world.

The company creates bespoke tire solutions for Original Equipment according to the requirements of leading premium car manufacturers across the globe and produces over 100 million tires for passenger cars, commercial vehicles and motorsports each year. Hankook employs approximately 22,000 people worldwide and sell products in over 180 countries. Internationally leading car manufacturers rely on tires made by Hankook for their Original Equipment.

For more information please visit <http://www.hankooktire.com>

WRC (FIA World Rally Championship)



Hankook Tire is the exclusive tire supplier and premium partner of the FIA World Rally Championship (WRC) starting in 2025, covering WRC1, WRC2, and WRC3. As the world's premier non-circuit motorsport, WRC challenges drivers to conquer highspeed, rugged terrains such as unpaved, snowy, and muddy roads, where tire durability and performance are critical. Since the 2000s, Hankook has excelled in developing rally tires for extreme conditions, demonstrating its expertise in the ERC and National Rally Championships in over 10 countries. The company also leads in tire innovation while supporting the next generation of rally stars through strategic sponsorships

Formula E



Hankook is the official tire partner of the ABB FIA Formula E World Championship since the 2022/23 season, reflecting its commitment to sustainability. The tires incorporate recycled and bio-sourced materials. Formula E's rules reinforce this focus by requiring a single tire type for wet and dry conditions and only two sets per race, reducing waste and transport. Hankook's specialized racing tires are engineered to meet the unique demands of the electric Gen3 cars, maintaining grip until the end despite the powerful torque, downforce, and high cornering speeds. Formula E serves as a global platform for electric vehicle technology development.

Super Trofeo



In 2023 Hankook became the official technical partner and exclusive tire supplier of Lamborghini Super Trofeo, the renowned international one-make cup, which comprises three series, held on four continents. Hankook developed a new, high-performance race tire, the Ventus Race, specifically tailored to the Lamborghini Huracán Super Trofeo Evo² racing car; its medium compound provides a high level of grip and maximum consistency in all conditions and at all racetracks. This brand-new tire is being used in Lamborghini Super Trofeo Europe, North America and Asia. Hankook provides technical support at the racetracks with Hankook engineers and mechanics on site to assist the drivers and teams.

24H Series



Hankook races with the world's top super cars proving its performance and durability and is the official sponsor of the world's largest endurance race series, the 24H Series. The series in which global premium brands including Ferrari, Mercedes-Benz and Porsche participate is a continuous 24 hour race which challenges the limits of the drivers, tires and race cars in the most extreme circumstances. The durability and performance of a race car and tires are the decisive factors in the series.

ERC



Since the 2000s, Hankook Tire has focused on developing rally tires that can perform even in extreme situations. Currently, Hankook Tire is fiercely competing in more than 10 countries and is demonstrating its technological prowess in the ERC and various National Rally Championships. In addition to providing various sponsorships to drivers with growth potential, Hankook Tire is also actively involved in the development and investment of improving tire performance.

Hankook OE Supply

As a leading global tire company, Hankook Tire is selected as Original Equipment for the premium automotive companies. We pride ourselves as a reliable contributor to the future advancement of the automobile industry.



AUDI

A3, A4, TT RS, e-tron Sportback, Q3, Q5, Q7, Q8, RS Q8, RS4, RS5, RS6, RS7, S#, SQ8, TT

BMW

3 Series, 4 Series, 5 Series, 6 Series, 7 Series, i4, i5, X1, X2, X3, X3M, X4M, X5, X6

MERCEDES-BENZ

A-Class, B-Class, C-Class Hybrid, E-Class, AMG GT, GLC Coupe, S-Class

PORSCHE

Boxster, Cayenne, Macan, Panamera, Taycan

VOLKSWAGEN

Arona, Golf, ID.4, Jetta, Tiguan, Tiguan R, Transporter

ION evo



ION evo A5



ION i*cept



VENTUS
S1 evo³ **ev**



VENTUS
S1 evo Z



VENTUS
S1 evo Z A5



VENTUS
evo



VENTUS
S1 evo³



VENTUS
S1 evo²



VENTUS
S1 A5



VENTUS
S1 noble²



VENTUS
S2 A5



VENTUS
Prime⁴



VENTUS
Prime³



KINERGY eco²



KINERGY AS X **ev**



KINERGY XP



KINERGY GT



OPTIMO
H426



Dynapro
HPX



Dynapro
HP2



Dynapro
HT



Dynapro
AT2



Dynapro
AT-M



Winter
i*cept evo³ x



Hankook OE Supply

PORSCHE

Vehicle Model	Product Name	Pattern	Size
Boxster ('21-'24)	Ventus S1 evo 3	K127	235/40ZR19
	Ventus S1 evo 3	K127	265/40ZR19
Boxster ('25-'31)	Ventus S1 evo Z	K129	245/40ZR19
	Ventus S1 evo Z	K129	245/45ZR18
	Ventus S1 evo Z	K129	295/35ZR20
	Ventus S1 evo Z	K129	295/40ZR19
Cayenne ('17-'22)	Ventus S1 evo 3 SUV	K127A	285/40ZR21
	Ventus S1 evo 3 SUV	K127A	315/35ZR21
Cayenne ('23-'30)	Dynapro HP2 Plus	RA33D	255/55R20
	Winter i*cept evo 3 X	W330A	255/55R20
	Ventus S1 evo Z	K129	255/55ZR20
	Dynapro HP2 Plus	RA33D	295/45R20
	Winter i*cept evo 3 X	W330A	295/45R20
	Ventus S1 evo Z	K129	295/45ZR20
Macan ('18-'21)	Ventus S1 evo 2 SUV	K117A	235/60R18
	Ventus S1 evo 2 SUV	K117A	255/55R18
Macan EV ('23-'29)	Ventus S1 evo 3 ev	K127E	235/55R20
	Ventus S1 evo 3 ev	K127E	285/45R20
Panamera ('19-'28)	Ventus S1 evo Z	K129	265/45ZR19
	Ventus S1 evo Z	K129	295/40ZR19
Panamera ('20-'28)	Ventus S1 evo Z	K129	275/40ZR20
	Ventus S1 evo Z	K129	315/35ZR20
Panamera ('23-'29)	Ventus S1 evo Z AS	H129	275/40R20
	Ventus S1 evo Z AS	H129	315/35R20
Panamera ('25-'35)	Ventus S1 evo Z	K129	275/35ZR21
	Ventus S1 evo Z	K129	325/30ZR21
Taycan ('19-'24)	Ventus S1 evo 3 ev	K127E	225/55R19
	Ventus S1 evo 3 ev	K127E	275/45R19

INFINITI

Vehicle Model	Product Name	Pattern	Size
QX60 ('23-'28)	Dynapro HP2	RA33	255/60R18

AUDI

Vehicle Model	Product Name	Pattern	Size
A3 ('16-'20)	Ventus S1 evo 2	K117	225/40R18
A4 ('15-'22)	Ventus S1 evo 2	K117	255/35R19
	Ventus S1 evo 2	K117	225/50R17
A4 ('15-'24)	Ventus S1 evo 2	K117	245/35ZR19
	Ventus S1 evo 2	K117	245/40R18
e-tron ('18-'24)	Dynapro HP2 Plus	RA33D	265/45R21
e-tron ('20-'29)	Kinergy AS X ev	EH01A	235/55R19
	Kinergy AS X ev	EH01A	255/50R19
e-tron GT ('19-'24)	Ventus S1 evo 3 ev	K127E	225/55R19
	Ventus S1 evo 3 ev	K127E	275/45R19
e-tron Sportback ('20-'25)	Ventus S1 evo 3 ev	K127E	265/40R22
	Ventus S1 evo 3 ev	K127E	285/35R22
Q3 ('18-'24)	Ventus S1 evo 2 SUV	K117A	255/40R20
	Ventus S1 evo 2 SUV	K117A	255/45R19
Q5 ('20-'23)	Ventus S1 evo 2 SUV	K117A	235/50R19
	Ventus S1 evo 3 SUV	K127A	235/60R18
Q7 ('16-'22)	Ventus S1 evo 2 SUV	K117A	285/35R22
	Ventus S1 evo 3 SUV	K127A	285/40R22
Q8 ('18-'20)	Dynapro HP2 Plus	RA33D	285/40R22
	Dynapro HP2 Plus	RA33D	285/45R21
Q8 ('18-'21)	Ventus S1 evo 3 SUV	K127A	285/35R23
	Dynapro HP2 Plus	RA33D	275/50R20
Q8 ('18-'22)	Dynapro HP2 Plus	RA33D	285/40R22
	Ventus S1 evo 3 SUV	K127A	265/55R19
Q8 ('18-'24)	Ventus S1 evo 3 SUV	K127A	285/40R22
	Ventus S1 evo 3 SUV	K127A	285/45R21
RS Q8 ('19-'24)	Dynapro HP2 Plus	RA33D	285/45R21
	Winter i*cept evo 2 SUV	W320A	275/40R22
RS4 ('17-'22)	Winter i*cept evo 2 SUV	W320A	295/35R23
	Ventus S1 evo 2	K117	265/35R19
RS5 ('17-'22)	Ventus S1 evo 2	K117	275/30R20
	Ventus S1 evo 2	K117	265/35R19
RS6 ('19-'24)	Ventus S1 evo 2	K117	275/30R20
	Ventus S1 evo 3	K127	275/35ZR21
RS7 ('19-'24)	Ventus S1 evo 3	K127	285/30ZR22
	Ventus S1 evo 3	K127	275/35ZR21
RS Q8 ('19-'21)	Ventus S1 evo 3	K127	285/30ZR22
RS Q8 ('19-'24)	Ventus S1 evo 3 SUV	K127A	295/35ZR23
S3 ('16-'20)	Ventus S1 evo 3 SUV	K127A	295/40ZR22
SQ8 ('18-'20)	Ventus S1 evo 3	K127	225/40R18
TT ('14-'22)	Ventus S1 evo 3	K127	225/40R18
	Ventus S1 evo 3 SUV	K127A	285/45R21
TT RS ('15-'24)	Ventus S1 evo 2	K117	225/50ZR17
	Ventus S1 evo 2	K117	245/35ZR19
	Ventus S1 evo 2	K117	245/35ZR19

BMW

Vehicle Model	Product Name	Pattern	Size
3-Series ('18-'25)	Ventus S1 evo 3	K127	225/50R17
	Ventus S1 evo 3	K127B	225/45R18
	Ventus S1 noble 2	H452	225/45R18
	Ventus S1 evo 3	K127B	255/40R18
3-Series ('20-'25)	Ventus S1 noble 2	H452B	225/45R18
4-Series ('18-'25)	Ventus S1 noble 2	H452	225/45R18
4-Series ('21-'25)	Ventus S1 evo 3	K127	245/45R18
	Ventus S1 evo 3	K127	255/45R18
	Ventus S1 evo 3	K127B	245/40R19
	Ventus S1 evo 3	K127	245/40R19
	Ventus S1 evo 3	K127B	255/40R19
	Ventus S1 evo 3	K127	255/40R19
5-Series ('16-'23)	Ventus S1 evo 2	K117B	225/55R17
5-Series ('16-'20)	Ventus S1 evo 2	K117B	245/45R18
5-Series ('17-'23)	Ventus S1 noble 2	H452B	245/45R18
	Ventus S1 evo 2	K117B	245/45R18
5-Series ('18-'25)	Ventus S1 evo 3	K127B	255/40R18
5-Series ('20-'23)	Ventus S1 evo 3	K127B	245/45R18
	Ventus S1 evo 3	K127B	275/40R18
5-Series ('24-'30)	iON i*cept	IW01	HL275/40R20
	iON i*cept	IW01	HL285/40R20
5-Series GT ('15-'22)	Ventus S1 evo 2	K117B	245/50R18
6-Series GT ('15-'24)	Ventus S1 evo 2	K117B	245/45R19
	Ventus S1 evo 2	K117B	275/40R19
7-Series GT ('15-'22)	Ventus S1 evo 2	K117B	245/50R18
7-Series GT ('15-'24)	Ventus S1 evo 2	K117B	245/45R19
	Ventus S1 evo 2	K117B	275/40R19
i4 ('21-'25)	Ventus S1 evo 3	K127	245/40R19
	Ventus S1 evo 3	K127B	245/40R19
	Ventus S1 evo 3	K127	245/45R18
	Ventus S1 evo 3	K127	255/40R19
	Ventus S1 evo 3	K127B	255/40R19
	Ventus S1 evo 3	K127	255/45R18
i5 ('23-'26),	Ventus S1 evo 3	K127	245/45R19
	Ventus S1 evo 3	K127	245/45R19
	Ventus S1 evo 3	K127	275/40R19
	Ventus S1 evo 3	K127	275/40R19
M5 ('24-'30)	iON i*cept	IW01	HL275/40R20
	Ventus S1 evo Z	K129	HL285/40ZR20
	iON i*cept	IW01	HL285/40R20
	Ventus S1 evo Z	K129	HL295/35ZR21
X1 ('15-'20)	Ventus S1 noble 2	H452	225/55R17
X1 ('24-'30)	iON i*cept	IW01	HL275/40R20
	iON i*cept	IW01	HL285/40R20
X1 ('24-'31)	Ventus S1 evo Z	K129A	245/35R21

Vehicle Model	Product Name	Pattern	Size
X2 ('15-'20)	Ventus S1 noble 2	H452	225/55R17
X2 ('17-'24)	Ventus S1 evo 2	K117B	225/50R18
X2 ('24-'31)	Ventus S1 evo Z	K129A	245/35R21
X3 ('17-'24)	Ventus S1 evo 2 SUV	K117C	225/60R18
X3 M ('20-'25)	Ventus S1 evo Z	K129	255/40ZR21
	Ventus S1 evo Z	K129	265/40ZR21
X4 ('17-'24)	Ventus S1 evo 2 SUV	K117C	225/60R18
X4 M ('20-'25)	Ventus S1 evo Z	K129	255/40ZR21
	Ventus S1 evo Z	K129	265/40ZR21
X5 ('18-'25)	Ventus S1 evo 3 SUV	K127C	265/50R19
X5 ('19-'25)	Ventus S1 evo 3 SUV	K127A	255/55R18
	Ventus S1 evo 3 SUV	K127C	275/45R20
	Ventus S1 evo 3 SUV	K127C	305/40R20
	Ventus S1 evo 3 SUV	K127C	315/35R21
X5 ('20-'25)	Ventus S1 evo 3 SUV	K127C	275/40R21
	Ventus S1 evo 3 SUV	K127C	275/40R21
	Ventus S1 evo 3 SUV	K127C	275/40R21
X6 ('18-'25)	Ventus S1 evo 3 SUV	K127C	265/50R19
X6 ('19-'25)	Ventus S1 evo 3 SUV	K127A	255/55R18
	Ventus S1 evo 3 SUV	K127C	275/40R21
	Ventus S1 evo 3 SUV	K127C	275/45R20
	Ventus S1 evo 3 SUV	K127C	305/40R20
X6 ('20-'25)	Ventus S1 evo 3 SUV	K127C	315/35R21
	Ventus S1 evo 3 SUV	K127C	315/35R21

About Hankook

Dynapro

iON

Ventus

Kinergy

WeatherFlex

Winter

Vantra

Hankook OE Supply

FORD

Vehicle Model	Product Name	Pattern	Size
Edge ('19-'24)	Ventus S1 noble 2	H452	245/55R19
	Ventus S1 noble 2	H452	245/50R20
Explorer ('16-'19)	Ventus S1 noble 2	H452	255/50R20
Fiesta ('11-'19)	Optimo H426	H426	185/60R15
	Optimo H426	H426	195/50R16
Expedition ('14-'24)	Dynapro AT-M	RF10	275/55R20
F-150 ('18-'20)	Dynapro AT2	RF11	275/55R20
F-150 XLT, Lariat, Platinum, Limited, Lightning ('20-'26)	Dynapro AT2	RF11	275/60R20
Flex ('10-'19)	Optimo H426	H426	255/45R20
Flex ('14-'19)	Dynapro AT-M	RF10	275/55R20
Mustang ('14-'27)	Ventus S1 noble 2	H452	235/55R17
Mustang Mach E ('23-'26)	Ventus S1 evo 3 ev	K127E	225/55R19
Ranger ('21-'23)	Dynapro AT-M	RF10	LT265/65R17
Ranger Lariat ('19-'23)	Dynapro AT-M	RF10	265/60R18
	Dynapro AT-M	RF10	265/60R18
Ranger XLT ('19-'23)	Dynapro AT-M	RF10	265/65R17

NISSAN

Vehicle Model	Product Name	Pattern	Size
Altima ('13-'18)	Optimo H426	H426	P215/60R16
Frontier ('15-'21)	Dynapro AT-M	RF10	P265/75R16
Frontier ('21-'27)	Dynapro AT2	RF11	265/70R17
Pathfinder ('21-'26)	Dynapro HP2	RA33	255/50R20
Pathfinder ('23-'28)	Dynapro HP2	RA33	255/60R18
Rogue ('20-'26)	Dynapro HP2	RA33	235/60R18
Sentra ('25-'30)	Ventus Prime 4	K135	215/50R17

CHEVROLET

Vehicle Model	Product Name	Pattern	Size
Equinox ('17-'20)	Ventus S1 noble 2	H452	235/50R19
Sonic ('11-'20)	Optimo H428	H428	P195/65R15
Trailblazer ('20-'26)	Dynapro AT2	RF11	225/60R17
Trax ('23-'29)	Dynapro HP2	RA33	225/60R17
Trax Crossover ('27-'29)	Ventus S2 AS	H462	245/45R19

MERCEDES BENZ

Vehicle Model	Product Name	Pattern	Size
AMG GT ('23-'30)	Ventus S1 evo Z	K129	295/35ZR20
	Ventus S1 evo Z	K129	305/35ZR20
A-Class ('18-'19)	Ventus S1 evo 2	K117	205/55R17
	Ventus S1 evo 2	K117	225/45R18
A-Class ('18-'25)	Ventus S1 evo 2	K117B	225/45R18
B-Class ('18-'19)	Ventus S1 evo 2	K117	205/55R17
	Ventus S1 evo 2	K117	225/45R18
B-Class ('18-'25)	Ventus S1 evo 2	K117B	225/45R18
C-Class ('13-'20)	Ventus S1 evo 2	K117B	225/50R17
C-Class Hybrid ('15-'21)	Ventus S1 evo 2	K117B	245/45R17
E-Class ('15-'23)	Ventus S1 evo 2	K117B	225/55R17
	Ventus S1 evo 2	K117B	245/45R18
E-Class ('17-'19)	Ventus S1 evo 2	K117B	245/45R18
E-Class ('17-'25)	Ventus S1 noble 2	H452B	245/45R18
E-Class ('22-'27)	Ventus S1 evo 3	K127	245/45R19
	Ventus S1 evo 3	K127	275/40R19
GLC Coupe ('16-'22)	Ventus S1 evo 2 SUV	K117A	235/55R19
	Ventus S1 evo 2 SUV	K117A	255/50R19
Metris ('15-'20)	Ventus S1 noble 2	H452	225/55R17
	Winter i*cept evo 2	W320	255/50R18
	Ventus S1 evo 3	K127	285/40R19
	Ventus S1 evo 3	K127	255/45R19
	Ventus S1 noble 2	H452B	255/45R19
	Ventus S1 noble 2	H452B	255/40R20
S-Class ('20-'27)	Ventus S1 noble 2	H452B	255/40R20
	Ventus S1 noble 2	H452B	255/40R20
	Ventus S1 noble 2	H452B	285/35R20
	Ventus S1 noble 2	H452B	285/35R20

VOLKSWAGEN

Vehicle Model	Product Name	Pattern	Size
ID.4 ('20-'29)	Kinergy AS X ev	EH01A	235/55R19
	Kinergy AS X ev	EH01A	255/50R19
Golf ('14-'18)	Ventus S1 noble 2	H452	225/40R18
Golf ('20-'25)	Ventus S1 evo 3	K127	235/35R19
Golf R/GTI ('20-'25)	Ventus S1 evo 3	K127	235/35R19
Tiguan R ('20-'24)	Ventus S1 evo 3 SUV	K127A	255/35R21
	Ventus S1 evo 2 SUV	K117A	255/40R20
Tiguan R-Line ('17-'21)	Ventus S1 noble 2	H452	255/45R19
	Ventus S1 noble 2	H452	255/40R20

MINI

Vehicle Model	Product Name	Pattern	Size
Clubman ('20-'25)	Ventus S1 evo 3	K127B	225/45R17
	Ventus Prime 4	K135	195/55R16
	Ventus Prime 4	K135	215/45R17
Cooper ('24-'30)	Ventus S1 evo 3	K127	215/40R18
	Ventus S1 evo 3	K127	215/40R18
	Ventus S1 evo 3	K127B	205/45R17
Cooper 3Door / 5Door / Convertible ('13-'24)	Optimo H426	H426	175/65R15
	Optimo H426	H426B	195/55R16
	Optimo H426	H426B	205/45R17
	Kinergy eco 2	K435	175/65R15
Cooper 3Door / 5Door / Convertible ('19-'24)	Ventus Prime 3	K125	195/55R16
	Ventus Prime 3	K125B	195/55R16
	Ventus S1 evo 3	K127	205/45R17
	Ventus S1 evo 3	K127B	205/45R17
Cooper JCW GP 3 ('20-'22)	Ventus S1 evo Z	K129	225/35R18
Countryman ('14-'20)	Ventus S1 noble 2	H452	225/55R17

HYUNDAI

Vehicle Model	Product Name	Pattern	Size
Azera ('16-'21)	Ventus S1 noble 2	H452	245/45R18
Elantra ('10-'15)	Optimo H426	H426	P215/45R17
Elantra ('15-'20)	Ventus S1 noble 2	H452	225/40R18
Elantra GT ('16-'20)	Ventus S1 noble 2	H452	225/40R18
Ioniq 6 ('22-'28)	Ventus S2 AS	H462	225/55R18
Kona ('17-'24)	Ventus S1 noble 2	H452	235/45R18
Palisade ('20~'24)	Ventus S1 noble 2	H452	245/50R20
	Dynapro HP2	RA33	235/55R19
	Dynapro HP2	RA33	235/60R18
Santa Fe ('18-'20)	Dynapro HP2	RA33	235/65R17
	Dynapro HP2	RA33	235/55R19
Santa Fe ('20-'21)	Dynapro HP2	RA33	235/60R18
Santa Fe ('20-'23)	Dynapro HP2	RA33	235/60R18

KIA

Vehicle Model	Product Name	Pattern	Size
Cadenza ('16-'21)	Ventus S1 noble 2	H452	245/45R18
Carnival ('20-'26)	Dynapro HP2	RA33	235/65R17
Sorento ('14-'20)	Dynapro HP2	RA33	235/55R19
Sedona ('14-'20)	Dynapro HP2	RA33	235/60R18
Sedona ('14-'21)	Dynapro HP2	RA33	235/65R17
Sorento ('15-'21)	Dynapro HP2	RA33	235/65R17
Soul ('18-'25)	Ventus S1 noble 2	H452	235/45R18
Sportage ('21-'26)	Dynapro HP2	RA33	235/65R17

SMART

Vehicle Model	Product Name	Pattern	Size
ForTwo Brabus Coupe/Cabriolet	Ventus V4 ES	H105	175/55R15
ForTwo Brabus Coupe/Cabriolet (Rear)	Ventus V4 ES	H105	215/35R17

LINCOLN

Vehicle Model	Product Name	Pattern	Size
MKT ('10-'19)	Optimo H426	H426	255/45R20
MKX ('14-'21)	Ventus S1 noble 2	H452	245/50R20
Navigator ('14-'24)	Dynapro AT-M	RF10	275/55R20

TOYOTA

Vehicle Model	Product Name	Pattern	Size
Corolla ('13-'18)	Optimo H426	H426	195/65R15

HONDA

Vehicle Model	Product Name	Pattern	Size
Passport ('25-'30)	Dynapro HP2	RA33	265/60R18
Pilot ('22-'28)	Dynapro HP2	RA33	255/60R18



SURETIRE PLAN

The Surefire way to Keep you Moving



HANKOOK 30 DAY FREE TRIAL PLAN

If you are not 100% satisfied for any reason with your purchase, simply bring the tires and proof of purchase back to the place of purchase within 30 days for a new set of Hankook produced tires and we will take care of the rest.



LIMITED WARRANTY & TREADWEAR MILEAGE WARRANTY

Hankook's Limited Warranty covers workmanship and material issues for the duration of the usable tread. We also provide very competitive Treadwear Mileage Warranty, which covers up to 90,000 miles on select replacement products.



ROAD HAZARD WARRANTY

If a tire becomes unserviceable due to a non-repairable road hazard, qualifying tires will be replaced at no cost with a comparable Hankook tire. Customers are responsible for all associated service and labor costs.

Highlights of Products Covered by the SURETIRE PLAN

The Surefire Way to Keep You Moving

Hankook is constantly striving to ensure the highest quality



Brand	Product	Free Trial Plan	Limited Warranty	Treadwear Mileage Warranty	Road Hazard Warranty
Ventus	Ventus evo(SUV)	30 Days	✓	30,000	✓
	Ventus S1 AS		✓	50,000	✓
	Dynapro evo AS		✓	50,000	✓
	Dynapro HPX		✓	70,000	✓
Dynapro	Dynapro HT2		✓	70,000 (P-Metric) 50,000 (LT-Metric)	✓ (P-Metric)
	Dynapro AT2 Xtreme		✓	70,000 (P-Metric) 60,000 (LT-Metric)	✓ (P-Metric)
	Dynapro XT		✓	50,000	
	Dynapro MT2		✓		
	Kinergy XP		✓	75,000	✓
Kinergy	Kinergy PT		✓	90,000 (All) 70,000 (Only V-Grade)	✓
	Kinergy ST		✓	70,000	✓
Weatherflex	Weatherflex GT		✓	70,000	✓

100-Day Trial EV Tire Exclusive

100-day free trial with iON premium care



for iON

Brand	Product	Free Trial Plan	Limited Warranty	Treadwear Mileage Warranty	Road Hazard Warranty
iON	iON evo	100 Days	✓	30,000	✓
	iON evo SUV		✓	30,000	✓
	iON evo AS		✓	55,000	✓
	iON evo AS SUV		✓	55,000	✓
	iON i*cept		✓	30,000	✓
	iON i*cept SUV		✓	30,000	✓
	iON HT		✓	80,000	✓

*Certain conditions and limitations apply to each product.
Please refer to the Warranty Catalog for detailed information.





hankook
driving emotion



Official Tire Partner



Dynapro

SUV / LT (4X4)

Dynapro evo AS (RA21)

Dynapro HPX (RA43)

Dynapro HT2 (RH14)

Dynapro AT2 Xtreme (RF12)

Dynapro XT (RC10)

Dynapro MT2 (RT05)

About Hankook

Dynapro

ION

Ventus

Kinergy

WeatherFlex

Winter

Vantra

Dynapro Products

Every Dynapro tire is crafted with purpose – whether it's mastering city streets, ensuring

The Dynapro Family	<i>Dynapro</i> <i>EVO AS</i>	<i>Dynapro</i> <i>HPX</i>	<i>Dynapro</i> <i>HT2</i>
Pattern Design			
Warranty	50K	70K	70K / 50K
Characteristics	• Dry & Wet grip • Precise handling	• Ride Comfort • Noise Reduction • Long tread life	• Road comfort • Durability • All-season Performance
On-road Performance	5+@	4.5	4.5
Ride & Noise	4	5	4.5
Wear	3.5	5	5
Durability	2	3	4.5
Off-road Performance	-	-	2

ing family comfort on long drives, or conquering off-road trails.

<i>Dynapro AT2 Xtreme</i>	<i>Dynapro XT</i>	<i>Dynapro MT2</i>
		
70K / 60K	50K	-
• Versatile Traction • Toughness • Balance of Ride & Off-road Grip	• Aggressive Traction • Off-road Durability • Decent Road Manners	• Extreme Traction • Self-Cleaning Tread • Cut & Chip Resistance
3.5	3.5	3
4	3.5	3
5	3.5	3
4.5	5	5+@
4	4.5	5

Dynapro On-Road Line Up

From SUVs to Pickup Trucks, experience the perfect on-road drive with tires designed for every journey.

Dynapro *evo* AS

“I drive a premium SUV and want sporty, precise handling.”



- Spirited driving or dynamic handling preferred
- Occasional high-speed performance

Dynapro *HPX*

“I want a smooth, quiet ride and Long tread life for long drive.”



- Focus on ride comfort and low noise
- Family or premium SUV use

***Dynapro* HT2**

“I mostly drive a full-size SUV or pickup truck on paved roads, and I am looking for durability as well as quietness.”



- Long highway commutes
- Versatile all-around capability

Dynapro Off-Road Line Up

From All-Terrain to Mud-Terrain, explore without limits with off-road tires made for every terrain.

Dynapro
AT2 Xtreme

“I sometimes drive off-road, but I still need to perform well on the road as well.”



- Adventure & camping lovers
- Balanced off-road capability with on-road comfort

Dynapro XT

“I often drive on rocky or uneven trails, so I need a durable tire with more traction. But I still can't lose the on-road comfort.”



- Hauling and wilderness exploration
- Rugged off-road conditions

Dynapro MT2

“I drive in muddy or rocky conditions, so I want a tire with maximum traction.”



- Hardcore off-roaders, overlanders, utility users
- Harsh terrain like mud, rocks and sand

The Dynapro Family

***Dynapro
evo***

PERFORMANCE
ALL-SEASON

***Dynapro
HPX***

TOURING
ALL-SEASON

***Dynapro
HT2***

HIGHWAY
TERRAIN



On-Road ←

Dynapro
AT2 Xtreme
ALL-TERRAIN

Dynapro
XT
RUGGED
TERRAIN

Dynapro
MT2
MUD
TERRAIN



→ Off-Road

Dynapro ***evo AS*** (RA21)

Ultimate Control. Powerful Performance.



Warranty



Road-engineered premium performance

Category Leader

Dynapro evo


Dry Braking
improved **3%**

Wet Braking
improved **6%**

* Source : Internal Product Performance Evaluation (Hankook Technoring, 255/45R20)


Double up structure

The tire features two reinforced belts with an additional pair layered on top, providing exceptional durability for high-speed performance. This advanced construction minimizes tread deformation and wear, ensuring reliable performance in various driving conditions.



Best void for wet driving

Enhanced drainage performance without compromised directional rigidity is achieved by precisely adjusting the center and intermediate chamfer depths with strategically placed internal tie bars and sipes.

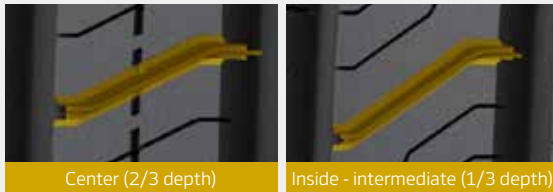


Optimized groove design

For a quieter ride, we designed the inner shoulder of the tire with expanded lateral grooves, while the outer shoulder features a closed design. This innovative combination traps resonance noise within the main grooves, to significantly reduce high-frequency noise.




Best groove for stiffness

The Wave and InterLocking Band 3D Sipes are designed with increased density and precision to minimize block deformation. With a wave pattern featuring diverse thicknesses and the integration of an Interlocking Band for depth optimization, handling and braking performance have been elevated.

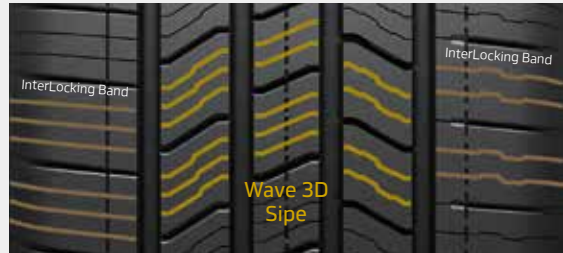


All-season compound

The Dynapro Evo AS incorporates a new compound with high silica content and high-performance resins, maximizing braking performance on both dry and wet surfaces. The cold-weather compounds ensure optimum snow-driving performance.

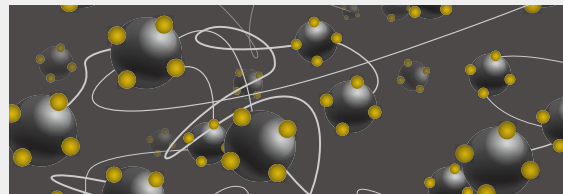

More mileage

To enhance wear performance, we optimized the contact patch with a square center and round shoulder design. We also removed acute corners from the lateral grooves to reduce uneven contact pressure.

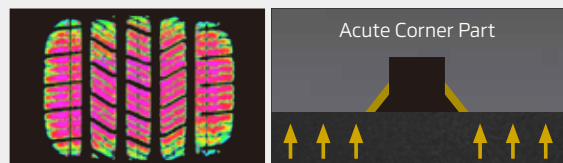

Dynapro HPX (RA43)

Provides the utmost handling and premium comfort for SUV tires



Warranty




Knurling technology


Knurling technology applied inside the grooves effectively reduces tread pattern noise during road contact by narrowing the air path, without losing the groove's intended features.



3d gripcontrol sipes




This helps to provide outstanding grip performance on dry, wet roads and light snow.

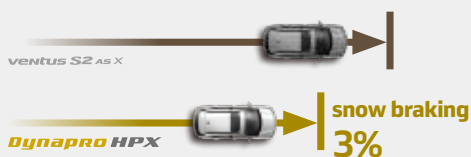


* Performance improvement (Test with Ventus S2 ASX)

New four-season high performance compound




A high concentration of silica was added to enhance the grip force on all surface conditions (wet & dry & snow).

Mileage Test Results



Optimized multi-pitch sequencing


Tire noise can be drastically reduced by optimizing the pitch sequence

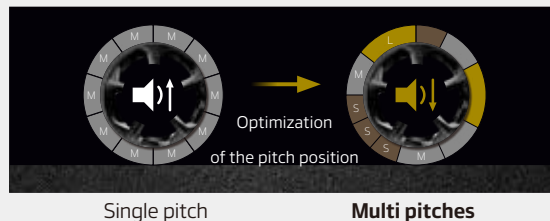


Single pitch

Multi pitches

Improved driving stability through pattern stiffness optimization



With a wider tread shoulder block, Delivering superior driving reliability



* Test with Ventus S2 AS X

Optimization of ground shape



Dynapro HT2 (RH14)

Redefined year-round comfort and durability



Warranty




*P-Metric only

Treadlife **LASTS UP TO 13% LONGER**

Altering profiles, patterns and applying a new compound resulted in a 13% increase in mileage compared to Dynapro HT (predecessor).


Optimized pattern stiffness

Enhanced block stiffness prevents uneven wear.

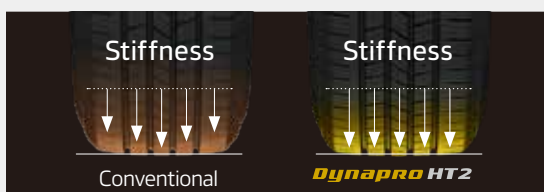

Profile technology

The Dynapro HT2 uses an exclusive flat, square profile designed to enhance wear performance.

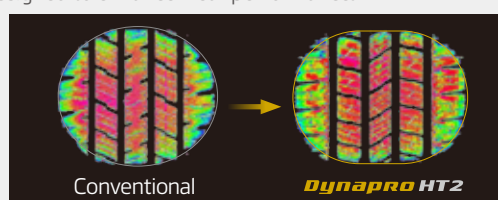

Snow Performance

Boosted siping count

More sipes enhance grip and control over snow.



SNOW Acc. Improved by **6%**
SNOW Braking Improved by **9%**
SNOW Handling Improved by **7%**
(compared to its predecessor)

Wet Performance


Optimized main groove design

Tread ratio optimization enhances water evacuation efficiency to prevent hydroplaning.



Wet Handling Improved by **7%**
WET Braking Improved by **6%**
(compared to its predecessor)

Quiet performance ↓ 2dB(A) Quieter

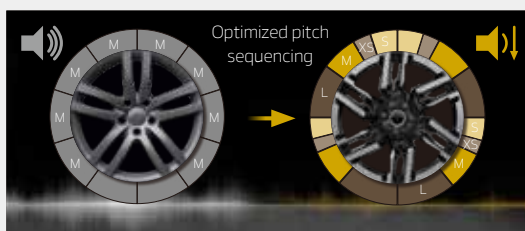

Noise-reducing tread pattern delivers a 2dB(A) quieter ride compared to its predecessor.

Dynapro AT2 Xtreme (RF12)

Tough in all terrains



Test & Design award



Warranty




*P-Metric only




Formulated compound


With our next generation compound technology, the Dynapro AT2 Xtreme provides increased longevity and enhanced cut/chip resistance.



Conventional



Dynapro AT2 Xtreme



Low-hysteresis carbon black

- High-dispersible silica
- Low-hysteresis carbon black

Multi-directional grooves and sipes



Provides better traction in any direction.

Biting block edges



Provides more traction and excellent snow performance.


3 Peak Mountain Snowflake qualified for severe snow conditions.

Aggressive shoulders and sidewall




Cross combined scoops applied on shoulder to enhance off road traction. High depth sidewall blocks provide protection and prevent cuts in off road conditions.

Staged block edges



Creates a sound barrier that reduces road noise.



Conventional

Dynapro AT2 Xtreme

Tie-bars

Stabilizes tread blocks to prevent noise and optimize movement for a more comfortable ride.



Dynapro XT (RC10)

The new specialty for the all-terrain tire



Test & Design award




GOOD DESIGN

Warranty



Sawtoothed sidewall



The aggressively designed sidewall enhances off-road traction and provides protection in tough terrains.

Shoulder block cushions



Cushions between the shoulder blocks relieve impact and absorb noise.

Polygonal blocks



The center blocks and shoulder blocks with high rigidity provide improved off-road traction and handling.



Lateral grooves



V shaped lateral grooves bite the surface for additional off-road grip.

Chamfered edges

The beveled edges minimize impact to reduce road noise.




Zig-zag grooves




The wide grooves provide added traction in off-road and snow, easily evacuates water and keep stones and mud. 3 Peak Mountain Snowflake qualified for severe snow conditions.

Formulated compound


Increases mileage, and cut/chip resistance.

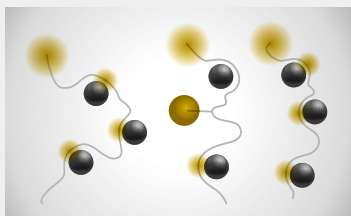

Conventional

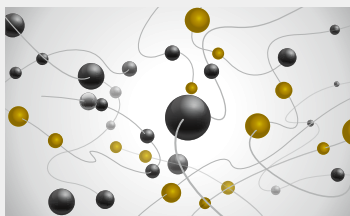

Dynapro XT



Low-hysteresis carbon black

Low-hysteresis carbon black provides low rolling resistance, delivering high mileage to drivers.

-  High-dispersible silica
-  Low-hysteresis carbon black

Dynapro MT2 (RT05)

Toughest wild-terrain off-road traction



Test & Design award



reddot winner 2020

Warranty



Terrain wide tread design



By our engineering 3D simulation, optimized the pattern design. Provide ultimate off-road traction while keeping on-road and quietness.

Connected shoulder tread




By connecting the tread and shoulder part, power through mud and soil condition and delivers improved high off-road traction.


Mud and rock defender



Stone ejectors protect the tread grooves against stone drilling and puncturing. Also shed the mud and stones from the tread grooves to maximize the grip.



Conventional



Dynapro MT2

Sidewall bump protector



Series of bumper protector is designed to protect the sidewall area. Objects are deflected away to protect sidewall against penetration.

More aggressive sidewall



An integrated design linking the shoulder and sidewall blocks completes the aggressive aesthetic with added aerodynamics, which help reduce noise and improve sidewall durability.

Tread block sipes



For improved traction in wet, snow and off-road conditions.

Rugged 3-ply sidewall



Developed to endure the most punishing off-road conditions.

Available Sizes

Dynapro evo AS | RA21

SUV Ultra-High Performance All-Season

Inch	S-Code	Size		LI/SS	Sidewall	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Depth	Revs/ Mile	Weight	UTQG	
							psi	lbs							
19	1034949	235/55ZR19	XL	105W	BSW	6.5-8.5	50	2,039	29.1	10.1	10.0	713	31.6	540/AA/A	
	1034951	255/55ZR19	XL	111W	BSW	7.0-9.0	50	2,403	29.9	10.9	10.0	694	35.3	540/AA/A	
	1036108	255/65R19	XL	114W	BSW	7.0-9.0	50	2,601	31.9	10.2	10.0	651	38.4	540/AA/A	
	1034950	265/50ZR19	XL	110W	BSW	7.5-9.5	50	2,337	29.3	11.4	10.0	709	33.6	540/AA/A	
20	1034953	235/50ZR20	XL	104W	BSW	6.5-8.5	50	1,984	29.1	10.2	10.0	713	30.6	540/AA/A	
	1034975	245/45ZR20	XL	103Y	BSW	7.5-9.0	50	1,929	28.5	9.6	10.0	730	28.6	540/AA/A	
	1034967	255/45ZR20	XL	105Y	BSW	8.0-9.5	50	2,039	28.9	10	10.0	720	31.0	540/AA/A	
	1036061	255/60ZR20	XL	113W	BSW	7.0-9.0	50	2,535	31.9	10.6	10.0	652	38.2	540/AA/A	
	1034966	265/45ZR20	XL	108Y	BSW	8.5-10.0	50	2,205	29.3	10.4	10.0	709	32.1	540/AA/A	
	1034972	275/40ZR20	XL	106Y	BSW	9.0-11.0	50	2,094	28.6	10.9	10.0	727	30.6	540/AA/A	
	1034974	275/50ZR20	XL	113W	BSW	7.5-9.5	50	2,535	30.8	11.7	10.0	674	38.1	540/AA/A	
	1034954	285/40ZR20	XL	108Y	BSW	9.5-11.0	50	2,205	28.8	11.3	10.0	721	33.3	540/AA/A	
	1034952	295/40ZR20	XL	110Y	BSW	10.0-11.5	50	2,337	29.1	11.7	10.5	713	34.1	540/AA/A	
	1034973	295/45ZR20	XL	114Y	BSW	9.5-11.0	50	2,601	30.4	12	10.0	684	40.0	540/AA/A	
	21	1036060	235/50ZR21	XL	104W	BSW	6.5-8.5	50	1,984	30	10.2	10.0	692	31.5	540/AA/A
		1034957	255/40ZR21	XL	102Y	BSW	8.5-10.0	50	1,874	28.8	10.2	10.0	721	28.9	540/AA/A
1034964		265/40ZR21	XL	105Y	BSW	9.0-10.5	50	2,039	29.2	10.6	10.0	712	30.7	540/AA/A	
1034946		265/45ZR21	XL	108Y	BSW	8.5-10.0	50	2,205	30.1	10.4	10.0	689	33.3	540/AA/A	
1034945		275/40ZR21	XL	107Y	BSW	9.0-11.0	50	2,149	29.5	10.9	10.0	705	30.9	540/AA/A	
1034955		275/45ZR21	XL	110Y	BSW	8.5-10.5	50	2,337	30.6	11.1	10.0	679	35.6	540/AA/A	
1034948		285/40ZR21	XL	109Y	BSW	9.5-11.0	50	2,271	29.8	11.3	10.0	698	34.7	540/AA/A	
1034947		285/45ZR21	XL	113Y	BSW	9.0-10.5	50	2,535	31.0	11.5	10.0	671	37.3	540/AA/A	
1034956		295/35ZR21	XL	107Y	BSW	10.0-11.5	50	2,149	29	11.7	10.0	717	32.7	540/AA/A	
1034959		315/35ZR21	XL	111Y	BSW	10.5-12.5	50	2,403	29.5	12.5	10.0	705	36.2	540/AA/A	
1034958		315/40ZR21	XL	115Y	BSW	10.5-12.5	50	2,679	30.7	12.5	10.5	676	39.8	540/AA/A	
22		1034960	275/40ZR22	XL	107Y	BSW	9.0-11.0	50	2,149	30.5	10.9	10.0	681	32.4	540/AA/A
	1034962	285/35ZR22	XL	106Y	BSW	9.5-11.0	50	2,094	29.6	11.3	10.0	701	32.0	540/AA/A	
	1034961	285/40ZR22	XL	110Y	BSW	9.5-11.0	50	2,337	30.8	11.3	10.0	673	35.8	540/AA/A	
	1034965	325/35ZR22	XL	114Y	BSW	11.0-13.0	50	2,601	30.8	12.9	10.0	674	40.6	540/AA/A	

Technical data subject to change without prior notice.

Overall Diameter, Section Width, Tread Depth in inches. Weight in lbs.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

Mileage, Road Hazard, and 30 Day Free Trial warranties apply only to replacement tires. Original Equipment tires are excluded.

Tech : Hankook Innovative Technology HRS : Hankook HRS System SOA : Sound Absorber SEG : Sealguard EV : Electric Vehicle

** Road Hazard Warranty and 30 Day Free Trial does not apply to LT-Metric tires*

Inch	S-Code	Size	LI/SS	Sidewall	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Depth	Revs/Mile	Weight	UTQG	OE
						psi	lbs							
16	1030847	215/70R16	SL	100H	BSW	5.5-7.0	51	1,764	27.7	8.7	10.5	749	25.6	680/A/A
17	1034416	215/60R17	SL	96H	BSW	6.0-7.5	51	1,565	27.1	9.1	10.5	767	25.3	680/A/A
	1030848	225/60R17	SL	99H	BSW	6.0-8.0	51	1,709	27.5	9.3	10.5	754	26.1	680/A/A
	1030849	225/65R17	SL	102H	BSW	6.0-8.0	51	1,874	28.4	9.3	10.5	732	27.6	680/A/A
	1030850	235/65R17	XL	108V	BSW	6.5-8.5	50	2,205	29.0	9.5	10.5	717	29.7	680/A/A
	1030851	245/65R17	SL	107H	BSW	7.0-8.5	51	2,149	29.4	9.8	10.5	707	29.6	680/A/A
	1034876	275/55R17	SL	109V	BSW	7.5-9.5	51	2,271	28.7	11.4	10.2	724	32.9	680/A/A
18	1034418	215/50R18	SL	92V	BSW	6.0-7.5	51	1,389	26.3	9.4	10.0	791	23.6	680/A/A
	1030852	225/60R18	SL	100H	BSW	6.0-8.0	51	1,764	28.5	9.4	10.5	729	27.7	680/A/A
	1030853	235/50R18	SL	97V	BSW	6.5-8.5	51	1,609	27.0	10.1	10.0	769	26.0	680/A/A
	1030854	235/55R18	SL	100V	BSW	6.5-8.5	51	1,764	28.0	9.8	10.0	741	27.5	680/A/A
	1030855	235/60R18	XL	107V	BSW	6.5-8.5	50	2,149	29.2	10.0	10.5	712	31.1	680/A/A
	1030856	235/65R18	SL	106V	BSW	6.5-8.5	51	2,094	29.9	9.5	10.5	694	30.4	680/A/A
	1030857	245/60R18	SL	105H	BSW	7.0-8.5	51	2,039	29.4	10.1	10.5	705	30.5	680/A/A
	1030858	255/55R18	XL	109V	BSW	7.0-9.0	50	2,271	28.9	10.7	10.0	719	31.1	680/A/A
	1034417	255/60R18	XL	112V	BSW	7.0-9.0	50	2,469	29.9	10.6	10.5	695	35.3	680/A/A
	1030859	255/65R18	SL	111H	BSW	7.0-9.0	51	2,403	30.9	10.3	10.5	672	32.9	680/A/A
	1030860	265/60R18	SL	110V	BSW	7.5-9.5	51	2,337	30.4	10.9	10.5	682	33.5	680/A/A
	1034871	285/60R18	SL	116V	BSW	8.0-10.0	51	2,756	31.4	11.9	10.7	662	40.6	680/A/A
19	1030861	225/55R19	SL	99V	BSW	6.0-8.0	51	1,709	28.5	9.4	10.0	728	27.5	680/A/A
	1030862	235/45R19	SL	95V	BSW	7.5-9.0	51	1,521	27.2	9.6	10.0	764	25.9	680/A/A
	1030863	235/50R19	SL	99V	BSW	6.5-8.5	51	1,709	28.0	10.1	10.0	741	27.2	680/A/A
	1030864	235/55R19	SL	101V	BSW	6.5-8.5	51	1,819	29.1	9.8	10.0	714	30.9	680/A/A
	1030845	245/50R19	XL	105H	BSW	7.0-8.5	50	2,039	28.7	10.4	9.0	725	29.3	560/A/A BMW X3 ('24-'28)
	1030865	245/55R19	SL	103H	BSW	7.0-8.5	51	1,929	29.5	10.4	10.0	704	29.6	680/A/A
	1030866	255/50R19	XL	107H	BSW	7.0-9.0	50	2,149	28.8	10.8	10.0	720	30.4	680/A/A
19	1030867	255/55R19	XL	111V	BSW	7.0-9.0	50	2,403	29.9	10.7	10.0	695	32.5	680/A/A
	1030868	255/60R19	SL	109H	BSW	7.0-9.0	51	2,271	30.9	10.6	10.5	672	32.9	680/A/A
	1030869	265/50R19	XL	110V	BSW	7.5-9.5	50	2,337	29.3	11.4	10.0	709	32.8	680/A/A
	1030870	275/55R19	XL	115V	BSW	7.5-9.5	50	2,679	30.8	11.4	10.0	675	37.0	680/A/A
20	1030871	235/55R20	SL	102V	BSW	6.5-8.5	51	1,874	29.9	9.8	10.0	695	29.8	680/A/A
	1030872	245/45R20	SL	99V	BSW	7.5-9.0	51	1,709	28.5	9.9	10.0	729	27.8	680/A/A
	1030873	245/50R20	SL	102V	BSW	7.0-8.5	51	1,874	29.4	10.5	10.0	706	29.7	680/A/A
	1030874	255/45R20	SL	101H	BSW	8.0-9.5	51	1,819	28.8	10.4	10.0	720	29.7	680/A/A
	1030875	255/50R20	XL	109V	BSW	7.0-9.0	50	2,271	29.8	10.8	10.0	697	31.5	680/A/A
	1030876	255/55R20	XL	110V	BSW	7.0-9.0	50	2,337	30.9	10.7	10.0	673	34.0	680/A/A
	1030877	265/45R20	XL	108V	BSW	8.5-10.0	50	2,205	29.2	10.8	10.0	712	32.3	680/A/A
	1030878	265/50R20	XL	111V	BSW	7.5-9.5	50	2,403	30.3	11.4	10.0	686	34.4	680/A/A
	1030879	275/45R20	XL	110V	BSW	8.5-10.5	50	2,337	29.6	11.1	10.0	703	34.1	680/A/A
	1030880	275/50R20	SL	109H	BSW	7.5-9.5	51	2,271	30.7	11.7	10.0	676	33.9	680/A/A
	1030881	275/55R20	SL	113V	BSW	7.5-9.5	51	2,535	31.8	11.4	10.0	654	37.8	680/A/A
	1030882	275/60R20	SL	115H	BSW	7.5-9.5	51	2,679	32.9	11.3	10.5	631	38.2	680/A/A
21	1035232	245/45R21	XL	104W	BSW	7.5-9.0	50	1,984	29.4	9.9	10.0	706	30.5	680/A/A
	1030883	275/45R21	XL	110H	BSW	8.5-10.5	50	2,337	30.5	11.1	10.0	680	35.1	680/A/A
22	1034097	275/45R22	XL	112V	BSW	8.5-10.5	50	2,469	31.6	11.1	10.0	658	37.2	680/A/A
	1035360	275/50R22	SL	111H	BSW	7.5-9.5	51	2,403	32.9	11.7	10.0	631	37.6	680/A/A
	1030318	285/45R22	XL	114H	BSW	9.0-10.5	50	2,601	31.9	11.5	10.5	651	39.0	680/A/A

Technical data subject to change without prior notice.

Overall Diameter, Section Width, Tread Depth in inches. Weight in lbs.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters
Mileage, Road Hazard, and 30 Day Free Trial warranties apply only to replacement tires. Original Equipment tires are excluded.

Tech : Hankook Innovative Technology HRS : Hankook HRS System SOA : Sound Absorber SEG : Sealguard EV : Electric Vehicle

* Road Hazard Warranty and 30 Day Free Trial does not apply to LT-Metric tires

Available Sizes

Dynapro HT2 | RH14

Highway Terrain

Inch	S-Code	Size		LI/SS	Sidewall	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Depth	Revs/ Mile	Weight	UTQG
							psi	lbs						
15	1034035	235/75R15	XL	109T	BSW	6.0-8.0	50	2,271	28.8	9.1	13.0	721	30.4	740/A/B
16	1034044	215/70R16	SL	100T	BSW	5.5-7.0	51	1,764	27.8	8.6	12.0	747	26.9	740/A/B
	1034042	225/70R16	SL	103T	BSW	6.0-7.5	51	1,929	28.4	8.9	12.5	732	28.0	740/A/B
	1034034	225/75R16	SL	104T	BSW	6.0-7.5	51	1,984	29.3	8.7	12.5	710	29.2	740/A/B
	1034048	235/70R16	XL	109T	BSW	6.0-8.0	50	2,271	28.9	9.3	12.5	718	30.5	740/A/B
	1034038	235/75R16	XL	112T	BSW	6.0-8.0	50	2,469	29.8	9.1	12.5	697	32.2	740/A/B
	1034045	245/70R16	SL	107T	BSW	6.5-8.0	51	2,149	29.5	9.6	12.5	705	31.5	740/A/B
	1034040	245/75R16	SL	111T	BSW	6.5-8.0	51	2,403	30.4	9.5	12.5	682	33.2	740/A/B
	1034047	255/70R16	SL	111T	BSW	6.5-8.5	51	2,403	30.0	10.2	12.5	692	34.6	740/A/B
	1034051	265/70R16	SL	112T	BSW	7.0-9.0	51	2,469	30.6	10.5	13.0	680	35.2	740/A/B
	1034037	265/75R16	SL	116T	BSW	7.0-9.0	51	2,756	31.6	10.3	13.0	657	37.9	740/A/B
17	1034057	225/65R17	SL	102H	BSW	6.0-8.0	51	1,874	28.4	9.3	12.0	731	29.4	740/A/B
	1034058	235/60R17	SL	102H	BSW	6.5-8.5	51	1,874	28.1	9.8	12.0	739	29.6	740/A/B
	1034033	235/75R17	SL	109T	BSW	6.0-8.0	51	2,271	30.9	9.4	13.0	674	32.0	740/A/B
	1034054	245/65R17	SL	107T	BSW	7.0-8.5	51	2,149	29.5	10.0	12.0	704	31.8	740/A/B
	1034050	245/70R17	SL	110T	BSW	6.5-8.0	51	2,337	30.5	9.6	12.5	681	34.4	740/A/B
	1034032	245/75R17	SL	112T	BSW	6.5-8.0	51	2,469	31.6	9.9	12.5	660	35.4	740/A/B
	1034052	255/65R17	SL	110T	BSW	7.0-9.0	51	2,337	30.0	10.5	12.5	691	34.7	740/A/B
	1034046	255/70R17	SL	112T	BSW	6.5-8.5	51	2,469	31.1	10.3	13.0	669	35.6	740/A/B
	1034055	265/65R17	SL	112T	BSW	7.0-9.0	51	2,469	30.5	10.9	12.5	681	37.3	740/A/B
	1034049	265/70R17	SL	115T	BSW	7.0-9.0	51	2,679	31.7	10.7	13.0	655	39.3	740/A/B
18	1034395	245/75R18	SL	112T	BSW	6.5-8.0	51	2,469	32.5	9.8	12.5	640	36.8	740/A/B
	1034041	255/70R18	SL	113T	BSW	6.5-8.5	51	2,535	32.1	10.4	13.0	649	37.2	740/A/B
	1034060	265/60R18	SL	110T	BSW	7.5-9.5	51	2,337	30.4	11.1	12.5	683	36.3	740/A/B
	1034053	265/65R18	SL	114T	BSW	7.5-9.5	51	2,601	31.5	10.9	13.0	659	38.8	740/A/B
	1034043	265/70R18	SL	116T	BSW	7.0-9.0	51	2,756	32.7	10.7	13.0	638	39.3	740/A/B
	1034056	275/65R18	SL	116H	BSW	7.5-9.5	51	2,756	32.1	11.1	12.5	648	40.2	740/A/B
20	1034061	275/55R20	SL	113H	BSW	7.5-9.5	51	2,535	31.8	11.6	12.0	654	40.1	740/A/B
	1034059	275/60R20	SL	115T	BSW	7.5-9.5	51	2,679	33	11.4	12.5	630	41.8	740/A/B
22	1034062	275/50R22	SL	111T	BSW	7.5-9.5	51	2,403	32.7	11.8	11.5	636	41.6	740/A/B
	1034063	285/45R22	XL	114H	BSW	9.0-10.5	50	2,601	32.0	11.5	11.5	650	41.3	740/A/B

Technical data subject to change without prior notice.

Overall Diameter, Section Width, Tread Depth in inches. Weight in lbs.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

Mileage, Road Hazard, and 30 Day Free Trial warranties apply only to replacement tires. Original Equipment tires are excluded.

Tech : Hankook Innovative Technology HRS : Hankook HRS System SOA : Sound Absorber SEG : Sealguard EV : Electric Vehicle

** Road Hazard Warranty and 30 Day Free Trial does not apply to LT-Metric tires*

Inch	S-Code	Size		LI/SS	Sidewall	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Depth	Revs/ Mile	Weight
							psi	lbs					
15	2021996	185/60R15C	C	94/92T	BSW	5.5-6.0	54	1,475/1,390	23.7	8.0	12.5	884	22.4
16	2021994	195/75R16C	D	107/105R	BSW	5.0-6.0	69	2,150/2,040	27.4	7.7	12.5	764	28.5
	2021993	205/75R16C	E	113/111R	BSW	5.5-6.5	76	2,535/2,405	28.0	7.9	12.5	746	31.8
	2022150	225/75R16C	E	121/120R	BSW	6.0-7.5	83	3,195/3,085	29.2	8.6	12.5	717	36.1
	2021995	235/65R16C	E	121/119R	BSW	6.5-7.5	83	3,195/3,000	28.0	9.6	12.5	747	35.5
	2022149	285/65R16C	E	131R	BSW	8.0-10.0	83	4,300/4,300	30.3	11.5	12.5	689	53.0
	2021992	LT215/85R16	E	115/112R	BSW	5.5-7.0	80	2,680/2,470	30.3	8.1	14.5	691	38.8
	2021990	LT225/75R16	E	115/112S	BSW	6.0-7.5	80	2,680/2,470	29.2	8.6	14.5	717	38.1
	2021907	LT235/85R16	E	120/116R	BSW	6.0-7.5	80	3,042/2,778	31.6	8.7	14.5	661	42.8
	2021906	LT245/75R16	E	120/116S	BSW	6.5-8.0	80	3,042/2,778	30.4	9.5	14.5	689	41.9
	2021901	LT265/75R16	E	123/120S	BSW	7.0-9.0	80	3,415/3,085	31.5	10.0	14.5	663	46.7
17	2021991	LT235/80R17	E	120/117R	BSW	6.0-8.0	80	3,085/2,835	31.7	8.9	14.5	660	43.1
	2021902	LT245/70R17	E	119/116S	BSW	6.5-8.0	80	3,000/2,755	30.5	9.6	14.5	686	42.9
	2021989	LT245/75R17	E	121/118S	BSW	6.5-8.0	80	3,195/2,910	31.4	9.5	14.5	666	44.2
	2022014	LT265/70R17	E	123/120S	BSW	7.0-9.0	80	3,415/3,085	31.6	10.6	14.5	662	47.9
	2022072	LT285/70R17	E	126/123S	BSW	7.5-9.5	80	3,750/3,415	32.7	11.3	14.5	640	61.9
18	2021988	LT265/70R18	E	124/121S	BSW	7.0-9.0	80	3,525/3,195	32.5	10.4	14.5	642	50.1
	2022070	LT275/65R18	E	123/120S	BSW	8.0-9.5	80	3,415/3,085	32.0	11.2	14.5	653	61.0
	2022068	LT275/70R18	E	125/122S	BSW	7.0-9.0	80	3,640/3,305	33.1	10.8	14.5	632	61.8
	2022069	LT285/65R18	E	125/122S	BSW	8.5-10.0	80	3,640/3,305	32.5	11.6	14.5	644	61.5
	2022071	LT295/70R18	E	129/126R	BSW	7.5-10.0	80	4,080/3,750	34.2	11.3	14.5	611	67.1
20	2021895	LT265/60R20	E	121/118S	BSW	8.0-9.5	80	3,195/2,910	32.4	10.9	14.5	645	55.4
	2021986	LT275/65R20	E	126/123S	BSW	8.0-9.5	80	3,750/3,415	34.0	11.2	14.5	614	63.0
	2021985	LT285/60R20	E	125/122R	BSW	8.5-10.0	80	3,640/3,305	33.4	11.6	14.5	626	63.5

Technical data subject to change without prior notice.

Overall Diameter, Section Width, Tread Depth in inches. Weight in lbs.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

Mileage, Road Hazard, and 30 Day Free Trial warranties apply only to replacement tires. Original Equipment tires are excluded.

Tech : Hankook Innovative Technology HRS : Hankook HRS System SOA : Sound Absorber SEG : Sealguard EV : Electric Vehicle

** Road Hazard Warranty and 30 Day Free Trial does not apply to LT-Metric tires*

Available Sizes

Dynapro AT2 Xtreme | RF12

All-Terrain

Inch	S-Code	Size	LI/SS	Sidewall	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Depth	Revs/ Mile	Weight	UTQG	Tech	OE
						psi	lbs								
15	1029781	235/75R15	XL	109T	RWL	6.0-8.0	50 2,271	28.8	9.0	12.5	722	32.1	660/A/B	3PMSF	
	*1036925	235/75R15	XL	TBD	BSW	6.0-8.0	TBD TBD	TBD	TBD	13.5	TBD	32.9	660/A/B	3PMSF	
16	1029808	215/70R16	SL	100T	RWL	5.5-7.0	51 1,764	27.8	8.6	12.5	747	28.1	660/A/B	3PMSF	
	*1036926	215/70R16	SL	TBD	BSW	5.5-7.0	TBD TBD	TBD	TBD	13.5	TBD	27.8	660/A/B	3PMSF	
	1029806	225/70R16	SL	103T	RWL	6.0-7.5	51 1,929	28.3	8.9	12.5	733	29.7	660/A/B	3PMSF	
	*1036927	225/70R16	SL	TBD	BSW	6.0-7.5	TBD TBD	TBD	TBD	13.5	TBD	29.4	660/A/B	3PMSF	
	1029798	225/75R16	XL	108T	RWL	6.0-7.5	50 2,205	29.2	8.7	12.5	711	32.0	660/A/B	3PMSF	
	*1036928	225/75R16	XL	TBD	BSW	6.0-7.5	TBD TBD	TBD	TBD	13.5	TBD	31.7	660/A/B	3PMSF	
	1029794	235/70R16	XL	109T	RWL	6.0-8.0	50 2,271	28.9	9.3	12.5	718	32.5	660/A/B	3PMSF	
	*1036929	235/70R16	XL	TBD	BSW	6.0-8.0	TBD TBD	TBD	TBD	13.5	TBD	32.9	660/A/B	3PMSF	
	1029795	235/75R16	XL	112T	RWL	6.0-8.0	50 2,469	29.9	9.1	12.5	694	34.4	660/A/B	3PMSF	
	*1036930	235/75R16	XL	TBD	BSW	6.0-8.0	TBD TBD	TBD	TBD	13.5	TBD	34.2	660/A/B	3PMSF	
	1029796	245/70R16	XL	111T	RWL	6.5-8.0	50 2,403	29.5	9.7	12.5	704	35.4	660/A/B	3PMSF	
	*1036931	245/70R16	XL	TBD	BSW	6.5-8.0	TBD TBD	TBD	TBD	13.5	TBD	35.1	660/A/B	3PMSF	
	1029783	245/75R16	SL	111T	RWL	6.5-8.0	51 2,403	30.4	9.6	12.5	682	36.6	660/A/B	3PMSF	
	*1036932	245/75R16	SL	TBD	BSW	6.5-8.0	TBD TBD	TBD	TBD	13.5	TBD	36.1	660/A/B	3PMSF	
	1029797	255/70R16	SL	111T	RWL	6.5-8.5	51 2,403	30.0	10.2	12.5	691	37.3	660/A/B	3PMSF	
	*1036933	255/70R16	SL	TBD	BSW	6.5-8.5	TBD TBD	TBD	TBD	13.5	TBD	36.5	660/A/B	3PMSF	
	1029782	265/70R16	SL	112T	RWL	7.0-9.0	51 2,469	30.6	10.6	12.5	678	38.5	660/A/B	3PMSF	
	*1036934	265/70R16	SL	TBD	BSW	7.0-9.0	TBD TBD	TBD	TBD	13.5	TBD	38.1	660/A/B	3PMSF	
	1029793	265/75R16	SL	116T	RWL	7.0-9.0	51 2,756	31.5	10.4	12.5	659	38.6	660/A/B	3PMSF	
	*1036935	265/75R16	SL	TBD	BSW	7.0-9.0	TBD TBD	TBD	TBD	13.5	TBD	38.4	660/A/B	3PMSF	
17	1031251	215/65R17	SL	99T	BSW	6.0-7.5	51 1,709	28.1	8.6	12.5	740	28.0	660/A/B	3PMSF	
	1035296	225/55R17	XL	101V	BSW	6.0-8.0	50 1,819	26.7	9.6	12.0	777	28.0	660/A/B	3PMSF	
	1031253	225/60R17	SL	99H	BSW	6.0-8.0	51 1,708	27.6	9.3	12.5	751	28.4	660/A/B	3PMSF	
	1035294	225/65R17	XL	106H	BSW	6.0-8.0	50 2,094	28.4	9.3	12.5	730	29.9	660/A/B	3PMSF	
	1035288	235/55R17	XL	103V	BSW	6.5-8.5	50 1,929	27.1	10.1	12.0	765	29.3	660/A/B	3PMSF	
	1029800	235/65R17	SL	104T	RWL	6.5-8.5	51 1,984	29.1	9.6	12.5	714	32.4	660/A/B	3PMSF	
	*1036936	235/65R17	SL	TBD	BSW	6.5-8.5	TBD TBD	TBD	TBD	13.5	TBD	32.2	660/A/B	3PMSF	
	1029799	235/75R17	SL	109T	RWL	6.0-8.0	51 2,271	30.8	9.2	12.5	674	34.4	660/A/B	3PMSF	
	*1036937	235/75R17	SL	TBD	BSW	6.0-8.0	TBD TBD	TBD	TBD	13.5	TBD	35.3	660/A/B	3PMSF	
	1029784	245/65R17	XL	111T	RWL	7.0-8.5	50 2,403	29.6	10.0	12.5	702	35.3	660/A/B	3PMSF	
	*1036938	245/65R17	XL	TBD	BSW	7.0-8.5	TBD TBD	TBD	TBD	13.5	TBD	35.2	660/A/B	3PMSF	
	1029786	245/70R17	SL	110T	RWL	6.5-8.0	51 2,337	30.5	9.7	12.5	681	37.0	660/A/B	3PMSF	
	*1036939	245/70R17	SL	TBD	BSW	6.5-8.0	TBD TBD	TBD	TBD	13.5	TBD	36.5	660/A/B	3PMSF	
	1029804	245/75R17	SL	112T	BSW	6.5-8.0	51 2,469	31.4	9.6	12.5	661	37.9	660/A/B	3PMSF	
	1029801	255/65R17	SL	110T	RWL	7.0-9.0	51 2,337	30.0	10.4	12.5	691	37.0	660/A/B	3PMSF	
	*1036940	255/65R17	SL	TBD	BSW	7.0-9.0	TBD TBD	TBD	TBD	13.0	TBD	37.1	660/A/B	3PMSF	
	1029785	255/70R17	SL	112T	RWL	6.5-8.5	51 2,469	31.1	10.2	12.5	669	38.6	660/A/B	3PMSF	
	*1036941	255/70R17	SL	TBD	BSW	6.5-8.5	TBD TBD	TBD	TBD	13.0	TBD	38.6	660/A/B	3PMSF	
	1029791	255/75R17	SL	115T	BSW	6.5-8.5	51 2,679	32.0	10.0	12.5	650	39.0	660/A/B	3PMSF	
	1029787	265/65R17	SL	112T	RWL	7.0-9.0	51 2,469	30.5	10.9	12.5	681	39.3	660/A/B	3PMSF	
	*1036942	265/65R17	SL	TBD	BSW	7.0-9.0	TBD TBD	TBD	TBD	13.5	TBD	39.2	660/A/B	3PMSF	
	1029842	265/70R17	SL	115T	RWL	7.0-9.0	51 2,679	31.6	10.6	12.5	657	39.6	660/A/B	3PMSF	
	1035120	265/70R17	SL	115T	BSW	7.0-9.0	51 2,679	31.5	10.3	10.5	660	36.5	520/A/B	3PMSF	Nissan Frontier (25-27)
	*1036943	265/70R17	SL	TBD	BSW	7.0-9.0	TBD TBD	TBD	TBD	13.5	TBD	39.7	660/A/B	3PMSF	
	1036137	285/70R17	SL	116T	BSW	7.5-9.5	51 2,756	32.7	11.2	13.5	635	43.7	660/A/B	3PMSF	
	*1036948	285/70R17	TBD	TBD	BSW	7.5-9.5	TBD TBD	TBD	TBD	TBD	TBD	TBD	660/A/B	3PMSF	

Inch	S-Code	Size	LI/SS	Sidewall	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Depth	Revs/Mile	Weight	UTQG	Tech	OE
						psi	lbs								
18	1035298	225/55R18	SL	98V	BSW	6.0-8.0	51	1,653	27.7	9.6	12.0	749	27.7	660/A/B	3PMSF
	1035297	225/60R18	XL	104H	BSW	6.0-8.0	50	1,984	28.6	9.4	12.5	727	29.9	660/A/B	3PMSF
	1035289	235/55R18	SL	100V	BSW	6.5-8.5	51	1,764	28.1	10.1	12.0	739	30.9	660/A/B	3PMSF
	1029802	235/60R18	SL	103T	BSW	6.5-8.5	51	1,929	29.1	9.9	12.5	715	32.8	660/A/B	3PMSF
	1031087	235/65R18	XL	110H	RWL	6.5-8.5	50	2,337	30.0	9.5	12.5	691	35.1	660/A/B	3PMSF
	*1036944	235/65R18	XL	TBD	BSW	6.5-8.5	TBD	TBD	TBD	TBD	13.5	TBD	34.8	660/A/B	3PMSF
	1035295	245/60R18	XL	109H	BSW	7.0-8.5	50	2,271	29.5	10.1	12.5	703	34.6	660/A/B	3PMSF
	1035301	255/55R18	XL	109V	BSW	7.0-9.0	50	2,271	29.0	10.9	12.0	716	34.4	660/A/B	3PMSF
	1029792	255/60R18	SL	108T	BSW	7.0-9.0	51	2,205	30.0	10.8	12.5	693	35.8	660/A/B	3PMSF
	1035291	255/65R18	SL	111H	BSW	7.0-9.0	51	2,403	31.1	10.5	12.5	669	36.8	660/A/B	3PMSF
	1029780	255/70R18	SL	113T	BSW	6.5-8.5	51	2,535	32.0	10.2	12.5	648	39.4	660/A/B	3PMSF
	1029779	265/60R18	XL	114T	BSW	7.5-9.5	50	2,601	30.4	11.0	12.5	682	38.9	660/A/B	3PMSF
	1029959	265/65R18	SL	114T	BSW	7.5-9.5	51	2,601	31.5	10.9	12.5	660	40.1	660/A/B	3PMSF
	1031247	265/70R18	SL	116T	BSW	7.0-9.0	51	2,756	32.6	10.6	12.5	638	41.3	660/A/B	3PMSF
	1029958	275/65R18	SL	116T	BSW	7.5-9.5	51	2,756	32.1	11.1	12.5	647	41.5	660/A/B	3PMSF
19	1035292	235/55R19	XL	105V	BSW	6.5-8.5	50	2,039	29.1	10.1	12.0	713	32.0	660/A/B	3PMSF
20	1035299	245/50R20	SL	102V	BSW	7.0-8.5	51	1,874	29.5	10.6	11.5	704	32.8	660/A/B	3PMSF
	1035290	245/60R20	XL	111H	BSW	7.0-8.5	50	2,403	31.5	10.1	12.5	659	37.6	660/A/B	3PMSF
	1034675	255/50R20	XL	109H	BSW	7.0-9.0	50	2,271	30.0	11.1	12.5	691	37.4	660/A/B	3PMSF
	*1036950	255/50R20	XL	TBD	BSW	7.0-9.0	TBD	TBD	TBD	TBD	13.5	TBD	37.8	660/A/B	3PMSF
	1035300	255/55R20	XL	110V	BSW	7.0-9.0	50	2,337	31.0	10.9	12.0	670	37.4	660/A/B	3PMSF
	1031249	265/50R20	XL	111T	BSW	7.5-9.5	50	2,403	30.5	11.4	12.5	682	40.3	660/A/B	3PMSF
	1035293	265/60R20	SL	112H	BSW	7.5-9.5	51	2,469	32.5	11.1	13.0	640	40.7	660/A/B	3PMSF
	1031250	275/55R20	SL	113T	BSW	7.5-9.5	51	2,535	31.9	11.5	12.5	652	41.9	660/A/B	3PMSF
	1029777	275/60R20	SL	115T	BSW	7.5-9.5	51	2,679	32.9	11.4	12.5	631	43.9	660/A/B	3PMSF
	*1037156	285/55R20	XL	TBD	BSW	8.0-10.0	TBD	TBD	TBD	TBD	13.5	TBD	45.5	660/A/B	3PMSF
	*1037157	295/55R20	SL	TBD	BSW	8.5-10.5	TBD	TBD	TBD	TBD	13.5	TBD	46.4	660/A/B	3PMSF
	1029803	305/50R20	XL	120T	BSW	8.5-11.0	50	3,086	32.0	12.8	12.5	650	48.4	660/A/B	3PMSF
	*1037158	305/55R20	XL	TBD	BSW	9.0-11.0	TBD	TBD	TBD	TBD	13.5	TBD	47.4	660/A/B	3PMSF
22	1035361	275/50R22	SL	111T	BSW	7.5-9.5	51	2,403	32.7	11.8	12.0	635	43.5	660/A/B	3PMSF
	1035738	285/45R22	XL	114H	BSW	9.0-10.5	50	2,601	32.0	11.5	12.5	650	41.7	660/A/B	3PMSF
	1029778	305/45R22	XL	118T	BSW	9.5-11.5	50	2,910	32.7	12.1	12.5	635	46.1	660/A/B	3PMSF

*** Available 2H 2026**

Technical data subject to change without prior notice.

Overall Diameter, Section Width, Tread Depth in inches. Weight in lbs.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

Tech : Hankook Innovative Technology HRS : Hankook HRS System SOA : Sound Absorber SEG : Sealguard EV : Electric Vehicle

**Road Hazard Warranty does not apply to LT-Metric tires*

Available Sizes

Dynapro AT2 Xtreme | RF12 **LT-Metric**

All-Terrain

Inch	S-Code	Size		LI/SS	Sidewall	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Depth	Revs/ Mile	Weight	Tech
							psi	lbs						
15	*2022358	30X9.50R15	C	104S	BSW	6.0-8.0	50	1,985/1,985	29.5	9.1	16.0	708	37.3	3PMSF
	2021644	30X9.50R15LT	C	104S	RWL	6.0-8.0	50	1,985/-	29.5	9.1	15.5	708	38.1	3PMSF
	2021629	31X10.50R15LT	C	109S	RWL	7.0-9.0	50	2,270/-	30.5	9.9	15.5	686	42.5	3PMSF
	*2022359	31X10.50R15LT	C	TBD	BSW	7.0-9.0	TBD	TBD	TBD	TBD	16.5	TBD	42.7	3PMSF
	2021822	32X11.50R15LT	C	113S	RWL	6.5-8.5	50	2,535/-	31.5	10.4	15.5	663	51.0	3PMSF
	*2022360	32X11.50R15LT	C	TBD	BSW	6.5-8.5	TBD	TBD	TBD	TBD	16.5	TBD	48.0	3PMSF
	2021654	33X12.50R15LT	C	108S	RWL	8.0-10.5	35	2,205/-	32.6	11.7	15.5	641	57.5	3PMSF
	*2022361	33X12.50R15LT	C	TBD	BSW	8.0-10.5	TBD	TBD	TBD	TBD	16.5	TBD	53.2	3PMSF
	2021652	LT215/75R15	C	100/97S	RWL	5.5-7.0	50	1,765/1,610	27.6	8.5	14.5	758	33.6	3PMSF
	*2022356	LT215/75R15	C	100/97S	BSW	5.5-7.0	50	1,765/1,610	27.6	8.5	14.5	758	32.7	3PMSF
	2021643	LT235/75R15	C	104/101S	RWL	6.0-8.0	50	1,985/1,820	28.8	9.1	15.5	726	37.6	3PMSF
	*2022357	LT235/75R15	C	104/101S	BSW	6.0-8.0	50	1,985/1,820	28.8	9.1	16.0	726	36.6	3PMSF
16	2021645	LT215/85R16	E	115/112S	RWL	5.5-7.0	80	2,680/2,470	30.3	8.2	15.0	690	40.0	3PMSF
	2021626	LT225/75R16	E	115/112S	BSW	6.0-7.0	80	2,680/2,470	29.2	8.7	15.0	716	39.4	3PMSF
	2021671	LT235/85R16	E	120/116S	BSW	6.0-7.5	80	3,042/2,778	31.6	8.6	16.0	661	44.3	3PMSF
	2021630	LT245/75R16	E	120/116S	RWL	6.5-8.0	80	3,042/2,778	30.4	9.5	15.0	688	44.3	3PMSF
	2021653	LT265/70R16	D	117/114S	RWL	7.0-9.0	65	2,835/2,600	30.6	10.4	15.5	684	46.5	3PMSF
	2021669	LT265/75R16	E	123/120S	BSW	7.0-8.0	80	3,415/3,085	31.7	9.9	15.5	660	47.4	3PMSF
	2021639	LT285/75R16	E	126/123S	RWL	7.5-9.0	80	3,750/3,415	32.8	10.7	15.5	637	59.8	3PMSF
	2021659	LT305/70R16	E	124/121S	RWL	8.0-10.0	65	3,525/3,195	32.8	11.9	15.5	637	62.7	3PMSF
	*2022366	LT305/70R16	E	TBD	BSW	8.0-10.0	TBD	TBD	TBD	TBD	16.5	TBD	58.0	3PMSF
	2021660	LT315/75R16	D	121/118S	RWL	8.0-10.5	50	3,195/2,910	34.6	11.7	15.5	605	65.5	3PMSF
	*2022367	LT315/75R16	D	TBD	BSW	8.0-10.5	TBD	TBD	TBD	TBD	16.5	TBD	62.5	3PMSF
	17	2021663	35X12.50R17LT	E	121S	RWL	8.0-10.5	65	3,195/-	34.5	11.7	16.0	606	69.4
*2022375		35X12.50R17LT	E	TBD	BSW	8.0-10.5	TBD	TBD	TBD	TBD	16.5	TBD	66.7	3PMSF
2021812		LT225/65R17	D	107/103S	BSW	6.0-8.0	65	2,150/1,930	28.4	9.0	15.0	735	38.4	3PMSF
2021651		LT225/75R17	E	116/113S	BSW	6.0-7.5	80	2,755/2,535	30.2	8.4	15.0	692	41.5	3PMSF
2021670		LT235/80R17	E	120/117S	BSW	6.0-7.5	80	3,085/2,835	31.7	8.8	16.0	659	44.3	3PMSF
2021805		LT245/65R17	D	111/108S	RWL	7.0-8.5	65	2,405/2,205	29.4	9.8	16.0	710	43.9	3PMSF
*2022368		LT245/65R17	D	TBD	BSW	7.0-8.5	TBD	TBD	TBD	TBD	16.5	TBD	42.4	3PMSF
2021633		LT245/70R17	E	119/116S	RWL	6.5-8.0	80	3,000/2,755	30.5	9.6	15.5	685	45.4	3PMSF
*2022369		LT245/70R17	E	TBD	BSW	6.5-8.0	TBD	TBD	TBD	TBD	16.5	TBD	45.0	3PMSF
2021632		LT245/75R17	E	121/118S	RWL	6.5-7.5	80	3,195/2,910	31.6	9.5	15.0	662	45.6	3PMSF
*2022370		LT245/75R17	E	TBD	BSW	6.5-8.0	TBD	TBD	TBD	TBD	16.5	TBD	45.4	3PMSF
2021813		LT255/75R17	C	111/108S	BSW	6.5-8.5	50	2,405/2,205	32.0	9.5	15.0	652	46.1	3PMSF
*2022391		LT255/80R17	E	TBD	BSW	6.5-8.5	TBD	TBD	TBD	TBD	16.5	TBD	50.1	3PMSF
*2022392		LT265/65R17	E	120/117S	BSW	8.0-9.5	80	3,085/2,835	30.5	10.7	14.5	686	45.9	3PMSF
2021667		LT265/70R17	E	121/118S	RWL	7.0-8.5	80	3,195/2,910	31.6	10.6	15.0	661	48.8	3PMSF
*2022371		LT265/70R17	E	121/118S	BSW	7.0-8.5	80	3,195/2,910	31.6	10.6	15.0	661	47.8	3PMSF

* Available 2H 2026

Technical data subject to change without prior notice.

Overall Diameter, Section Width, Tread Depth in inches. Weight in lbs.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

Tech : Hankook Innovative Technology HRS : Hankook HRS System SOA : Sound Absorber SEG : Sealguard EV : Electric Vehicle

* Road Hazard Warranty does not apply to LT-Metric tires

Inch	S-Code	Size		LI/SS	Sidewall	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Depth	Revs/ Mile	Weight	Tech
							psi	lbs						
17	2021650	LT275/70R17	E	121/118S	RWL	7.0-9.0	80	3,195/2,910	32.1	10.6	15.5	652	56.8	3PMSF
	*2022372	LT275/70R17	E	TBD	BSW	7.0-9.0	TBD	TBD	TBD	TBD	16.5	TBD	51.5	3PMSF
	2021640	LT285/70R17	E	121/118S	RWL	7.5-9.0	80	3,195/2,910	32.7	11.2	15.5	639	58.7	3PMSF
	*2022373	LT285/70R17	E	121/118S	BSW	7.5-9.5	80	3,195/2,910	32.7	11.2	16.0	639	57.3	3PMSF
	2021704	LT285/75R17	E	121/118S	BSW	7.5-9.5	80	3,195/2,910	33.8	10.6	15.5	618	60.7	3PMSF
	2021662	LT295/70R17	E	121/118S	BSW	7.5-10.0	80	3,195/2,910	33.2	11.5	15.5	630	61.5	3PMSF
	2021661	LT315/70R17	E	121/118S	RWL	8.0-10.5	65	3,195/2,910	34.4	12.3	15.5	608	69.5	3PMSF
	*2022374	LT315/70R17	E	TBD	BSW	8.0-10.5	TBD	TBD	TBD	TBD	16.5	TBD	67.1	3PMSF
18	2021705	33X12.50R18LT	F	122S	BSW	8.5-11.0	80	3,305/-	32.5	12.2	15.5	643	67.2	3PMSF
	2021718	35X12.50R18LT	F	128S	BSW	8.5-11.0	80	3,970/-	34.5	11.9	16.0	606	73.2	3PMSF
	2021809	LT265/60R18	E	119/116S	BSW	8.0-9.5	80	3,000/2,755	30.5	10.9	14.5	686	46.8	3PMSF
	2021707	LT265/65R18	E	122/119S	BSW	8.0-9.5	80	3,305/3,000	31.4	10.6	15.0	665	49.8	3PMSF
	2021634	LT265/70R18	E	124/121S	BSW	7.0-9.0	80	3,525/3,195	32.6	10.5	15.0	641	50.2	3PMSF
	2021642	LT275/65R18	E	123/120S	BSW	7.5-9.0	80	3,415/3,085	32.1	11.0	14.5	652	61.1	3PMSF
	2021641	LT275/70R18	E	125/122S	BSW	7.0-8.5	80	3,640/3,305	33.1	10.8	14.5	631	63.1	3PMSF
	2021664	LT285/65R18	E	125/122S	BSW	8.5-10.0	80	3,640/3,195	32.6	11.4	14.5	642	63.3	3PMSF
	*2022393	LT285/70R18	E	TBD	BSW	7.5-9.5	TBD	TBD	TBD	TBD	16.5	TBD	64.0	3PMSF
	2021708	LT285/75R18	E	129/126S	BSW	7.5-9.5	80	4,080/3,750	34.8	10.6	14.5	601	66.8	3PMSF
	2021709	LT295/70R18	E	129/126S	BSW	7.5-10.0	80	4,080/3,750	34.4	11.1	14.5	608	67.5	3PMSF
	2021717	LT305/65R18	E	124/121S	BSW	9.0-11.0	65	3,525/3,195	33.7	11.7	14.5	621	69.5	3PMSF
	2021655	LT325/60R18	E	124/121S	BSW	9.5-11.5	65	3,525/3,195	33.3	13.1	14.5	628	69.4	3PMSF
	2021666	LT325/65R18	E	127/124S	BSW	9.5-11.5	65	3,860/3,525	34.6	12.8	14.5	605	75.9	3PMSF
20	2021710	33X12.50R20LT	F	119S	BSW	8.5-11.0	80	3,000/-	32.6	12.6	14.5	641	66.4	3PMSF
	*2021715	35X12.50R20LT	F	125S	BSW	8.5-11.0	80	3,640/-	34.5	12.4	15.5	606	73.2	3PMSF
	2021648	LT265/60R20	E	121/118S	BSW	8.0-9.5	80	3,195/2,910	32.5	10.7	14.5	644	55.0	3PMSF
	2021636	LT275/55R20	D	115/112S	BSW	7.5-9.5	65	2,680/2,470	31.9	11.6	14.5	656	55.2	3PMSF
	2021638	LT275/60R20	D	119/116S	BSW	7.5-9.5	65	3,000/2,755	32.9	11.1	14.5	635	57.1	3PMSF
	2021635	LT275/65R20	E	126/123S	BSW	7.5-9.5	80	3,750/3,415	34.0	11.2	14.5	614	64.6	3PMSF
	2021637	LT285/55R20	E	122/119S	BSW	8.0-10.0	80	3,305/3,000	32.4	11.8	16.0	646	63.6	3PMSF
	2021711	LT285/60R20	E	125/122S	BSW	8.5-10.0	80	3,640/3,305	33.5	11.6	14.5	625	64.9	3PMSF
	*2021656	LT285/65R20	E	127/124S	BSW	8.5-10.0	80	3,860/3,525	34.6	11.6	14.5	605	68.3	3PMSF
	2021712	LT295/55R20	E	123/120S	BSW	8.5-10.5	80	3,415/3,085	32.8	12.3	16.0	638	65.1	3PMSF
	2021657	LT295/60R20	E	126/123S	BSW	8.5-10.5	80	3,750/3,415	33.9	12.0	15.0	617	69.7	3PMSF
	*2021713	LT295/65R20	E	129/126S	BSW	8.5-10.5	80	4,080/3,750	35.1	11.9	14.5	595	71.7	3PMSF
	2021807	LT305/55R20	F	125/122S	BSW	9.0-11.0	80	3,640/3,305	33.2	12.7	15.5	630	69.6	3PMSF
	*2021649	LT325/60R20	E	126/123S	BSW	9.5-11.5	65	3,750/3,415	35.3	13.1	15.5	592	75.9	3PMSF
22	2021714	35X12.50R22LT	F	121S	BSW	8.5-11.0	80	3,195/-	34.5	12.7	15.5	606	70.1	3PMSF
	*2021658	LT325/50R22	F	122S	BSW	9.5-11.5	65	3,305/-	34.8	13.6	16.0	600	77.1	3PMSF

*** Available 2H 2026**

Technical data subject to change without prior notice.

Overall Diameter, Section Width, Tread Depth in inches. Weight in lbs.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

Tech : Hankook Innovative Technology HRS : Hankook HRS System SOA : Sound Absorber SEG : Sealguard EV : Electric Vehicle

**Road Hazard Warranty does not apply to LT-Metric tires*

Available Sizes

Dynapro XT | RC10 **LT-Metric**

Rugged Terrain

Inch	S-Code	Size		LI/SS	Sidewall	Max. Load			Overall Diameter	Section Width	Tread Depth	Revs/ Mile	Weight	Tech
						Rim Width Range	psi	lbs						
16	*2022353	LT235/85R16	E	TBD	BSW	6.0-7.5	TBD	TBD	TBD	TBD	16.5	TBD	45.4	3PMSF
	*2022322	LT245/75R16	E	120/116R	BSW	6.5-8.0	80	3,042/2,778	30.4	9.4	16.0	688	43.7	3PMSF
	*2022394	LT265/75R16	E	123/120R	BSW	7.0-9.0	80	3,415/3,085	31.6	9.8	16.0	661	47.9	3PMSF
	*2022324	LT285/75R16	E	TBD	BSW	7.5-9.0	TBD	TBD	TBD	TBD	16.5	TBD	56.7	3PMSF
17	*2022354	33X12.50R17LT	E	TBD	BSW	8.5-11.0	TBD	TBD	TBD	TBD	16.5	TBD	61.1	3PMSF
	2021505	35X12.50R17LT	F	121R	BSW	8.0-10.5	80	3,195/-	34.5	11.9	17.0	605	71.1	3PMSF
	2021366	37X12.50R17LT	D	124R	BSW	8.0-10.5	50	3,525/-	36.6	11.7	17.0	572	69.9	3PMSF
	2021367	LT235/80R17	E	120/117R	BSW	6.0-8.0	80	3,085/2,835	31.7	8.8	15.5	659	44.2	3PMSF
	*2022328	LT245/70R17	E	TBD	BSW	6.5-8.0	TBD	TBD	TBD	TBD	16.5	TBD	44.9	3PMSF
	2021368	LT245/75R17	E	121/118R	BSW	6.5-8.0	80	3,195/2,910	31.4	9.4	15.5	665	45.7	3PMSF
	2021369	LT255/75R17	C	111/108R	BSW	6.5-8.5	50	2,405/2,205	32.0	9.6	15.5	654	46.7	3PMSF
	2021370	LT255/80R17	E	121/118R	BSW	6.5-8.5	80	3,195/2,910	33.0	9.6	15.5	633	49.3	3PMSF
	2021371	LT265/70R17	E	121/118R	BSW	7.0-9.0	80	3,195/2,910	31.6	10.4	15.5	661	48.3	3PMSF
	*2022330	LT275/70R17	E	TBD	BSW	7.0-9.0	TBD	TBD	TBD	TBD	16.5	TBD	56.9	3PMSF
	2021497	LT285/70R17	E	121/118R	BSW	7.5-9.5	80	3,195/2,910	32.7	11.2	15.5	639	57.8	3PMSF
	2021373	LT285/75R17	E	121/118R	BSW	7.5-9.5	80	3,195/2,910	33.8	10.6	15.5	618	60.4	3PMSF
	2021374	LT295/70R17	E	121/118R	BSW	7.5-10.0	80	3,195/2,910	33.3	11.4	15.5	628	59.7	3PMSF
	2021498	LT315/70R17	E	121/118R	BSW	8.0-10.5	65	3,195/2,910	34.4	12.2	15.5	608	69.9	3PMSF
18	2021376	33X12.50R18LT	F	122R	BSW	8.5-11.0	80	3,305/-	32.5	12.3	17.0	643	65.9	3PMSF
	2021506	35X12.50R18LT	F	128R	BSW	8.5-11.0	80	3,970/-	34.5	12.0	17.0	605	72.3	3PMSF
	*2022334	37X12.50R18LT	E	TBD	BSW	8.0-10.5	TBD	TBD	TBD	TBD	16.5	TBD	74.2	3PMSF
	*2022332	LT265/65R18	E	TBD	BSW	8.0-9.5	TBD	TBD	TBD	TBD	16.5	TBD	50.3	3PMSF
	*2022326	LT265/70R18	E	TBD	BSW	7.0-9.0	TBD	TBD	TBD	TBD	16.5	TBD	50.2	3PMSF
	2021499	LT275/65R18	E	123/120R	BSW	8.0-9.5	80	3,415/3,085	32.0	10.9	15.5	652	61.7	3PMSF
	2021501	LT275/70R18	E	125/122R	BSW	7.0-9.0	80	3,640/3,305	33.1	10.8	15.5	631	62.7	3PMSF
	2021500	LT285/65R18	E	125/122R	BSW	8.0-10.0	80	3,640/3,305	32.5	11.4	15.5	643	63.8	3PMSF
	2021381	LT285/75R18	E	129/126R	BSW	7.5-9.5	80	4,080/3,750	34.8	10.6	15.5	600	65.5	3PMSF
	2021382	LT295/70R18	E	129/126R	BSW	7.5-10.0	80	4,080/3,750	34.3	11.4	15.5	610	66.5	3PMSF
	*2022355	LT305/70R18	E	TBD	BSW	8.0-10.0	TBD	TBD	TBD	TBD	16.5	TBD	69.2	3PMSF
	*2022390	LT325/65R18	D	TBD	BSW	9.5-11.5	TBD	TBD	TBD	TBD	16.5	TBD	69.1	3PMSF
20	2021384	33X12.50R20LT	F	119R	BSW	8.5-11.0	80	3,000/-	32.5	12.6	17.0	643	66.8	3PMSF
	*2022333	35X11.50R20LT	E	TBD	BSW	7.5-10.0	TBD	TBD	TBD	TBD	16.5	TBD	66.2	3PMSF
	*2021385	35X12.50R20LT	F	125R	BSW	8.5-11.0	80	3,640/-	34.5	12.3	17.0	606	71.7	3PMSF
	*2021386	37X12.50R20LT	F	128R	BSW	8.5-11.0	80	3,970/-	36.6	12.0	17.0	572	76.5	3PMSF
	*2021387	37X13.50R20LT	F	128R	BSW	9.5-11.0	80	3,970/-	36.5	13.1	17.0	572	80.8	3PMSF
	*2022329	LT265/60R20	E	TBD	BSW	8.0-9.5	TBD	TBD	TBD	TBD	16.5	TBD	58.1	3PMSF
	*2022325	LT275/55R20	E	TBD	BSW	7.5-9.5	TBD	TBD	TBD	TBD	16.5	TBD	60.2	3PMSF
	*2022323	LT275/60R20	E	TBD	BSW	7.5-9.5	TBD	TBD	TBD	TBD	16.5	TBD	63.2	3PMSF
	2021388	LT275/65R20	E	126/123R	BSW	8.0-9.5	80	3,750/3,415	34.0	11.2	15.5	615	65.0	3PMSF
	2021389	LT285/55R20	E	122/119R	BSW	8.5-10.0	80	3,305/3,000	32.4	11.9	15.5	644	62.5	3PMSF
	*2022327	LT285/60R20	E	TBD	BSW	8.5-10.0	TBD	TBD	TBD	TBD	16.5	TBD	64.9	3PMSF
	*2022331	LT285/65R20	E	TBD	BSW	8.5-10.0	TBD	TBD	TBD	TBD	16.5	TBD	67.1	3PMSF
	2021390	LT295/55R20	E	123/120R	BSW	8.5-10.5	80	3,415/3,085	32.8	12.3	15.5	638	63.2	3PMSF
	2021391	LT295/60R20	E	126/123R	BSW	8.5-10.5	80	3,750/3,415	33.9	11.9	15.5	617	67.9	3PMSF
	*2021392	LT295/65R20	E	129/126R	BSW	8.5-10.5	80	4,080/3,750	35.1	11.7	15.5	596	70.5	3PMSF
	2021393	LT305/55R20	F	125/122R	BSW	9.0-11.0	80	3,640/3,305	33.2	12.6	15.5	629	66.8	3PMSF
22	2021394	33X12.50R22LT	F	114R	BSW	8.5-11.0	80	2,600/-	32.5	12.8	15.5	643	68.2	3PMSF
	2021395	35X12.50R22LT	F	121R	BSW	8.5-11.0	80	3,195/-	34.5	12.6	17.0	606	72.6	3PMSF
	*2022335	37X12.50R22LT	E	TBD	BSW	8.0-10.5	TBD	TBD	TBD	TBD	16.5	TBD	76.1	3PMSF
	*2021396	37X13.50R22LT	F	128R	BSW	9.5-12.0	80	3,970/-	36.5	13.4	17.0	573	82.8	3PMSF

* Available 2H 2026

Technical data subject to change without prior notice.

Overall Diameter, Section Width, Tread Depth in inches. Weight in lbs.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

Tech : Hankook Innovative Technology HRS : Hankook HRS System SOA : Sound Absorber SEG : Sealguard EV : Electric Vehicle

* Road Hazard Warranty does not apply to LT-Metric tires

Hankook
driving emotion



Official Tire Partner



Dynapro

BUILT WITHOUT LIMITS

Groundbreaking technology engineered
to perform everyday, everywhere.

Dynapro EVO AS Dynapro HPX Dynapro HT2 Dynapro AT2 Xtreme Dynapro XT Dynapro MT2



Available Sizes

Dynapro MT2 | RT05 **LT-Metric**

Mud Terrain

Inch S-Code	Size	LI/SS	Sidewall	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Depth	Revs/ Mile	Weight	OE		
					psi	lbs								
15	2020980	30X9.50R15LT	C	104Q	OWL	6.0-8.0	50	1,985/-	29.7	9.0	17.0	704	41.3	
	*2022378	30X9.50R15LT	C	TBD	BSW	6.0-8.0	TBD	TBD	TBD	TBD	16.5	TBD	40.8	
	2020981	31X10.50R15LT	C	109Q	OWL	7.0-9.0	50	2,270/-	30.7	10.1	17.5	679	47.5	
	*2022379	31X10.50R15LT	C	TBD	BSW	7.0-9.0	TBD	TBD	TBD	TBD	16.5	TBD	46.8	
	2020982	32X11.50R15LT	C	113Q	OWL	6.5-8.5	50	2,535/-	31.8	10.6	17.0	657	52.9	
	*2022380	32X11.50R15LT	C	TBD	BSW	6.5-8.5	TBD	TBD	TBD	TBD	16.5	TBD	51.4	
	2020983	33X12.50R15LT	C	108Q	OWL	8.5-11.0	35	2,205/-	32.8	11.7	17.0	636	59.6	
	*2022381	33X12.50R15LT	C	TBD	BSW	8.0-10.5	TBD	TBD	TBD	TBD	16.5	TBD	54.0	
	2020985	LT215/75R15	C	100/97Q	OWL	5.5-7.0	50	1,765/1,610	27.8	8.3	15.5	751	35.7	
	*2022376	LT215/75R15	C	TBD	BSW	5.5-7.0	TBD	TBD	TBD	TBD	16.5	TBD	34.4	
	2020986	LT235/75R15	C	104/101Q	OWL	6.0-8.0	50	1,985/1,820	29.0	8.9	16.0	720	39.1	
	*2022377	LT235/75R15	C	TBD	BSW	6.0-8.0	TBD	TBD	TBD	TBD	16.5	TBD	39.0	
16	2020730	LT215/85R16	E	115/112Q	BSW	5.5-7.0	80	2,680/2,470	30.5	8.0	17.0	685	43.9	
	2020799	LT225/75R16	E	115/112Q	BSW	6.0-7.5	80	2,680/2,470	29.4	8.5	17.0	710	42.4	
	2020800	LT245/75R16	E	120/116Q	BSW	6.5-8.0	80	3,042/2,778	30.6	9.5	17.5	684	48.0	
	2020988	LT265/75R16	E	123/120Q	OWL	7.0-9.0	80	3,415/3,085	31.8	10.0	17.0	657	54.1	
	*2022382	LT265/75R16	E	123/120Q	BSW	7.0-9.0	80	3,415/3,085	31.8	10.0	17.0	657	50.7	
	*2022383	LT285/75R16	E	TBD	BSW	7.5-9.0	TBD	TBD	TBD	TBD	16.5	TBD	58.5	
	2021075	LT305/70R16	E	124/121Q	OWL	8.0-10.0	65	3,525/3,195	33.0	11.8	18.5	633	67.9	
	*2022384	LT305/70R16	E	TBD	BSW	8.0-10.0	TBD	TBD	TBD	TBD	16.5	TBD	63.6	
	2020990	LT315/75R16	E	127/124Q	OWL	8.0-10.5	65	3,860/3,525	34.8	11.7	17.5	601	70.9	
	*2022385	LT315/75R16	E	TBD	BSW	8.0-10.5	TBD	TBD	TBD	TBD	16.5	TBD	66.3	
	17	*2022337	33X12.50R17LT	F	TBD	BSW	8.5-11.0	TBD	TBD	TBD	TBD	16.5	TBD	65.0
		2020790	35X12.50R17LT	E	121Q	BSW	8.0-10.5	65	3,195/-	34.7	12.0	18.5	602	73.4
2022193		37X12.50R17LT	D	124Q	BSW	8.0-10.5	50	3,525/-	36.7	11.5	20.0	570	79.7	
*2022340		37X13.50R17LT	E	TBD	BSW	9.5-12.0	TBD	TBD	TBD	TBD	16.5	TBD	79.2	
*2022346		40X13.50R17	TBD	TBD	BSW	9.0-11.5	TBD	TBD	TBD	TBD	TBD	TBD	TBD	
2021077		LT245/75R17	E	121/118Q	OWL	6.5-8.0	80	3,195/2,910	31.7	9.3	17.5	659	50.6	
*2022386		LT245/75R17	E	121/118Q	BSW	6.5-8.0	80	3,195/2,910	31.7	9.3	18.0	659	47.3	
2020801		LT255/75R17	E	121/118Q	BSW	6.5-8.5	80	3,195/2,910	32.2	9.8	17.0	650	51.4	
*2022336		LT255/80R17	E	TBD	BSW	6.5-8.5	TBD	TBD	TBD	TBD	16.5	TBD	51.9	
2020765		LT265/70R17	E	121/118Q	OWL	7.0-9.0	80	3,195/2,910	31.9	10.4	17.5	656	52.9	
*2022387		LT265/70R17	E	121/118Q	BSW	7.0-9.0	80	3,195/2,910	31.9	10.4	18.0	656	49.7	
2020991		LT285/70R17	E	121/118Q	OWL	7.5-9.5	80	3,195/2,910	32.9	11.3	18.5	635	64.4	
*2022388		LT285/70R17	E	TBD	BSW	7.5-9.5	TBD	TBD	TBD	TBD	16.5	TBD	62.0	
*2022344		LT285/75R17	E	TBD	BSW	7.5-9.5	TBD	TBD	TBD	TBD	16.5	TBD	62.1	
2020802		LT295/70R17	E	121/118Q	BSW	7.5-10.0	80	3,195/2,910	33.5	11.5	17.0	624	65.9	
2020803		LT315/70R17	D	121/118Q	BSW	8.0-10.5	50	3,195/2,910	34.6	12.3	18.0	605	72.9	

* Available 2H 2026

Technical data subject to change without prior notice.

Overall Diameter, Section Width, Tread Depth in inches. Weight in lbs.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

Tech : Hankook Innovative Technology HRS : Hankook HRS System SOA : Sound Absorber SEG : Sealguard EV : Electric Vehicle

* Road Hazard Warranty does not apply to LT-Metric tires

Inch S-Code	Size	LI/SS	Sidewall	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Depth	Revs/ Mile	Weight	OE		
					psi	lbs								
18	2021406	33X12.50R18LT	F	122Q	BSW	8.5-11.0	80	3,305/-	32.7	12.2	16.5	616	69.4	Chevrolet Silverado HD ('20-'23), GMC Sierra HD ('20-'23)
	2021407	35X12.50R18LT	F	128Q	BSW	8.5-11.0	80	3,970/-	34.8	12.0	19.0	580	76.0	
	*2022345	37X12.50R18LT	E	TBD	BSW	8.5-11.0	TBD	TBD	TBD	TBD	16.5	TBD	76.9	
	*2022347	37X13.50R18LT	D	TBD	BSW	9.5-12.0	TBD	TBD	TBD	TBD	16.5	TBD	73.4	
	2021076	LT235/80R17	E	120/117Q	BSW	6.0-8.0	80	3,085/2,835	31.9	8.7	17.0	654	48.5	
	2020798	LT235/85R16	E	120/116Q	BSW	6.0-7.5	80	3,042/2,778	31.9	8.8	17.0	655	48.9	
	2020806	LT275/65R18	E	123/120Q	BSW	8.0-9.5	80	3,415/3,085	32.2	10.9	18.0	649	64.7	
	2021223	LT275/70R18	E	125/122R	BSW	7.0-9.0	80	3,640/3,305	33.3	10.7	18.5	628	61.2	
	2020807	LT285/65R18	E	125/122Q	BSW	8.0-10.0	80	3,640/3,305	32.7	11.4	17.5	639	68.1	
	*2022469	LT285/70R18	TBD	TBD	BSW	7.5-9.5	TBD	TBD	TBD	TBD	TBD	TBD	TBD	
	2020989	LT285/75R16	E	126/123Q	OWL	7.5-9.5	80	3,750/3,415	33.0	10.6	17.0	633	63.4	
	*2022342	LT285/75R18	E	TBD	BSW	7.5-9.5	TBD	TBD	TBD	TBD	16.5	TBD	67.6	
	2020805	LT295/70R18	E	129/126Q	BSW	7.5-10.0	80	4,080/3,750	34.5	11.5	17.0	606	71.9	
	2021079	LT305/70R18	E	126/123Q	OWL	8.0-10.0	65	3,750/3,415	35.0	11.8	18.5	597	77.1	
	*2022389	LT305/70R18	E	TBD	BSW	8.0-10.0	TBD	TBD	TBD	TBD	16.5	TBD	72.0	
20	2021409	33X12.50R20LT	F	119Q	BSW	8.5-11.0	80	3,000/-	32.8	12.6	17.0	616	69.6	
	*2022338	35X11.50R20LT	E	TBD	BSW	7.5-10.0	TBD	TBD	TBD	TBD	16.5	TBD	68.3	
	2021411	35X12.50R20LT	F	125Q	BSW	8.5-11.0	80	3,640/-	34.7	12.4	18.0	581	77.0	
	*2022351	37X11.50R20LT	E	TBD	BSW	7.5-10.0	TBD	TBD	TBD	TBD	16.5	TBD	75.4	
	2021084	37X12.50R20LT	E	126Q	BSW	8.5-11.0	80	3,750/-	36.7	12.4	18.5	569	82.0	
	2020795	37X13.50R20LT	E	127Q	BSW	9.5-11.0	65	3,860/-	36.8	13.2	18.0	569	88.8	
	*2022343	LT265/60R20	E	TBD	BSW	8.0-9.5	TBD	TBD	TBD	TBD	16.5	TBD	59.2	
	2021412	LT275/55R20	E	120/117Q	BSW	7.5-9.5	80	3,085/2,835	32.2	11.3	18.5	649	63.0	
	*2022339	LT275/60R20	E	TBD	BSW	7.5-9.5	TBD	TBD	TBD	TBD	16.5	TBD	65.4	
	2020808	LT275/65R20	E	126/123Q	BSW	8.0-9.5	80	3,750/3,415	34.2	10.6	18.0	611	70.4	
	2021080	LT285/55R20	E	122/119Q	BSW	8.5-10.0	80	3,305/3,000	32.6	11.9	17.5	642	67.0	
	*2022341	LT285/60R20	E	TBD	BSW	8.5-10.0	TBD	TBD	TBD	TBD	16.5	TBD	67.4	
	*2022348	LT285/65R20	E	TBD	BSW	8.5-10.0	TBD	TBD	TBD	TBD	16.5	TBD	70.1	
	2020809	LT295/55R20	E	123/120Q	BSW	8.5-10.5	80	3,415/3,085	33.0	12.3	16.0	634	68.9	
	2021081	LT295/60R20	E	126/123Q	BSW	8.5-10.5	80	3,750/3,415	34.1	11.5	17.5	613	73.2	
	2021082	LT295/65R20	E	129/126Q	BSW	8.5-10.5	80	4,080/3,750	35.3	11.6	16.0	592	75.1	
	2021414	LT305/55R20	F	125/122Q	BSW	9.0-11.0	80	3,640/3,305	33.4	12.3	18.0	604	72.5	
	2021083	LT315/60R20	E	125/122Q	BSW	9.5-11.0	65	3,640/3,305	35.1	12.6	18.0	596	79.2	
22	2021415	33X12.50R22LT	F	114Q	BSW	8.5-11.0	80	2,600/-	32.7	12.8	17.0	639	66.0	
	2021416	35X12.50R22LT	F	121Q	BSW	8.5-11.0	80	3,195/-	34.7	12.3	17.0	602	73.0	
	*2022440	37X12.50R22LT	TBD	TBD	BSW	8.5-11.0	TBD	TBD	TBD	TBD	TBD	TBD	TBD	
	2021418	37X13.50R22LT	F	128Q	BSW	9.5-12.0	80	3,970/-	36.7	13.4	19.0	550	87.2	
	*2022352	LT285/50R22	E	TBD	BSW	8.0-10.0	TBD	TBD	TBD	TBD	16.5	TBD	70.5	
	*2022349	LT285/55R22	E	TBD	BSW	8.0-10.0	TBD	TBD	TBD	TBD	16.5	TBD	72.7	
24	*2022350	37X13.50R24LT	F	TBD	BSW	9.5-12.0	TBD	TBD	TBD	TBD	16.5	TBD	89.4	

Chevrolet Silverado HD ('20-'23), GMC Sierra HD ('20-'23)





ion

CAR / SUV

iON evo AS (IH01)

iON evo AS SUV (IH01A)

iON HT (IHT01)

iON evo (IK01)

iON evo SUV (IK01A)

iON i*cept (IW01)

iON i*cept SUV (IW01A)

iON Nordic ice (IW04)

iON Nordic ice SUV (IW04A)

About Hankook

Dynapro

iON

Ventus

Kinergy

WeatherFlex

Winter

Vantra

Why do electric vehicles need specialized tires?

EV Features

EV Tire Requirements

Quiet Operation

Low Noise

for Comfortable Driving

Heavy Battery
(up to 30% weight increase)

Longer Tread Life

for Load Capacity

High Instant Torque

High Grip

for Rapid Acceleration and Braking

- Long Charging Time (0.5 to 8 hrs)
- Travels <250 to 300mi / charge

Low Rolling Resistance

for Reduced Energy Loss



Battery EV



Plug-in
hybrid EV



ION INNOVATIVE™
TECHNOLOGY

ION INNOVATIVE™ TECHNOLOGY



i Sound Absorber



i Super Mileage



i Perfect Grip



i Extreme Lightness

ION

Why EV needs EV specific tire

Hankook Tire secured **326** EV technology patents, **58** of which are used exclusively in iON

i Sound Absorber
9 patents

i Super Mileage
11 patents


Noise Guard
Ziq-zaq
8 patents

EP Application No. :
20206989.4 and 7 others



Round Even
1 patent

KR Application No. :
10-2021-0004477





Noise Guard
Cornhusk
1 patent

KR Application No. :
10-2021-0079351



ProDurable
Compound
10 patents

EP Application No. :
18206108.5 and 9 others



max **18%**
Noise Reduction



max **15%**
Longer Tread Life

ION INNOVATIVE™
TECHNOLOGY

i Perfect Grip
23 patents


i Extreme Lightness
15 patents

Grip Claw
8 patents

EP Application No. :
23157987.1 and 7others




ProCoupling Compound
15 patents

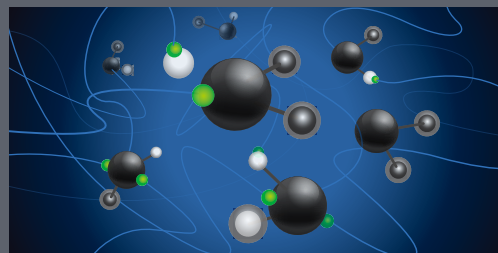

EP Application No. : 20185285.2 and 14
others

ProGrip Compound
15 patents

EP Application No. :
19203083.1 and
14 others



max **6%** increased
Battery Range



max **10%**
improved
Driving Stability

The iON Family

ION evo AS
ION evo AS **SUV**
All-Season

ION HT
Highway Terrain



ION evo
ION evo SUV

Summer Sport

ION i*cept
ION i*cept SUV

Winter Studless

ION Nordic i*ce
ION Nordic i*ce SUV

Winter Nordic
Stud



ION evo AS (IH01)

ION evo AS **SUV** (IH01A)

Evolutionized to perform and last



Test & Design award



reddot winner 2023
vehicle accessories design

Warranty



* Available for EVs

Go Further for More Experience

i Extreme Lightness

Further reduced rolling resistance

Opti Cure


Thanks to Hankook's advanced compound and optimized curing technology, the rolling resistance is reduced to drive a long distance with a longer-lasting battery.



i Super Mileage

Extended tread life

Produrable Compound




Composed with high-concentration silica and eco-friendly materials, the EVolution compound provides satisfactory mileage and improves wet performance.

Even tread wear

Round Even

Tires equipped on electric vehicles wear out approximately 20% faster with uneven wear than on ICE vehicles. Designed to spread the ground pressure evenly, the iON evo AS (and SUV) provides longer usage and less replacement.

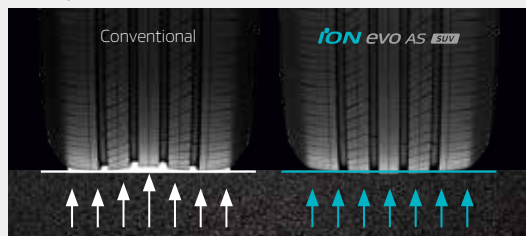


Drive in Peace

i Sound Absorber

Minimized tread pattern noise

Noise Guard


The iON evo AS (and SUV)'s knurling technology applied inside the grooves effectively reduces tread pattern noise during road contact by narrowing the air path, without losing the groove's intended features.

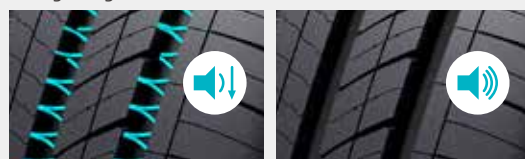

Opti Pitch



Tire noise can be drastically reduced by optimizing the pitch sequence. iON evo AS (and SUV) has optimized the number and size of pitches to listen more to what matters.



Hold Tight, Stay Strong

i Perfect Grip

Enhanced cornering stability

Grip Boost

To bear weight of electric vehicles, tire stiffness is essential to improve. Hankook's EV Contour Technology increases lateral rigidity by 25%, and cornering rigidity by 20% compared to all-season touring tires for ICEs, to advance electric vehicle grip performance.



ION HT (IHT01)
EV Endurance for the Long Haul



Warranty




* Available for EVs

Engineered to Take You Further


i Super Mileage

Round Even Technology


Maximize mileage by maintaining uniform road contact pressure through balanced load distribution and an optimized footprint.

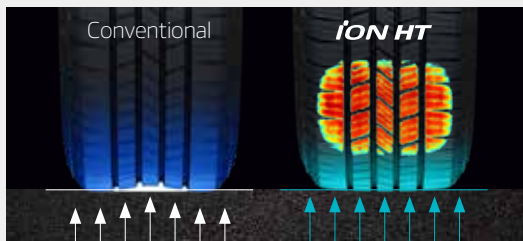

Opti Tread Technology




Improve mileage by minimizing uneven tread wear with block-specific rigidity optimization.

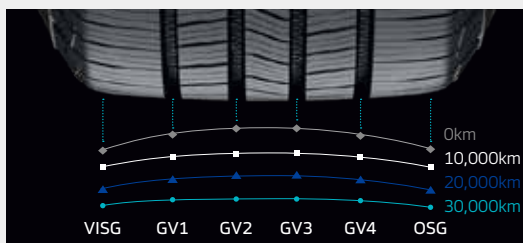

ProDurable Compound


Enhance wear performance by minimizing friction through advanced polymer flexibility and optimized silica dispersion technology.

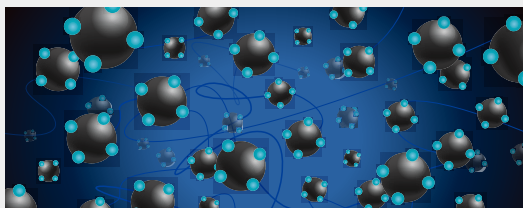

i Extreme Lightness


Opti Cure Technology

Extend the range of your EV by minimizing energy loss during rotation with low-temperature curing.

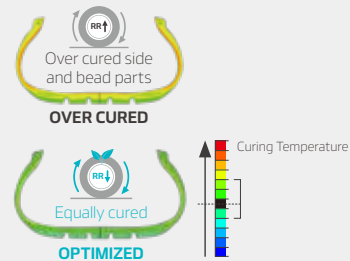

Roll Lite Compound

Boost efficiency with reduced internal tire friction through the application of LRR-specific rim cushion and sub-tread compounds.

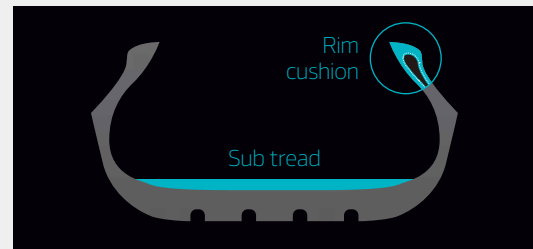

i Perfect Grip

New 3D-Embossed Sipe

Enhance traction with innovative New 3D-Embossed Sipe for superior braking performance.



ION evo (IK01)

ION evo SUV (IK01A)

Evolutionized to perform more



Test & Design award



reddot winner 2023
vehicle accessories design

Warranty



Charge Less, Cruise More

i Extreme Lightness

Low rolling resistance (LRR)

Opti Cure

The iON evo achieved the highest grade in low rolling resistance (LRR) by utilizing a specialized compound and an optimized curing process, which ensures uniform performance across the entire tire.



Drive in Peace


i Sound Absorber

Minimized tread pattern noise

Opti Pitch



Tire noise can be drastically reduced by optimizing the pitch sequence. The iON evo (and SUV) has optimized the number and size of pitches to listen more to what matters.




Go Further for More Experience

i Super Mileage

Extended tread life

Produrable Compound



Composed with high-concentration silica and eco-friendly materials, the EVolution compound provides satisfactory mileage and further reduced rolling resistance.

Be in Complete Control

i Perfect Grip

Enhanced cornering stability

Grip Boost



Tire stiffness is essential to be improved to bear the weight of electric vehicles. Hankook's EV Contour Technology increases cornering stiffness by 10% to advance electric vehicle handling performance.

Improved steering at high speeds

Aramid hybrid reinforcement belt



A reinforcement belt mixed with the most advanced fiber, Aramid, is applied on the iON evo (and SUV) to improve steering performance and maintain an optimized shape during high-speed driving.

Excellent traction

Extended shoulder blocks with optimized rigidity




To prevent slippage caused by the high torque of electric vehicles, the pattern block rigidity is optimized with extended outside shoulder blocks for maximum road contact.

Grip Maintained in the Rain

Enhanced Wet Grip

Wet performance without missing noise reduction

Expanding lateral grooves



The lateral grooves are designed narrower on the inside to reduce air-pumping noise, and wider on the outside to secure wet performance. This is another double advantage of the iON evo (and SUV).

ION *icept* (IW01)

ION *icept* **SUV** (IW01A)

Evolutionised to perform more in winter



Test & Design award



reddot winner 2023
vehicle accessories design

Warranty




Drive in Peace

i Sound Absorber

Minimized cavity noise


Noise Guard

The iON i*cept (and SUV)'s knurling technology applied inside the grooves effectively reduces resonance noise during road contact by narrowing the air path, without losing the groove's intended features.

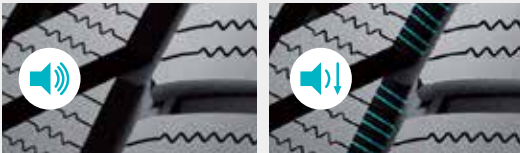

Multi-pitch optimization

Tire noise can be drastically reduced by optimizing the pitch sequence. The iON i*cept (and SUV) has optimized the number and size of pitches to listen more to what matters.

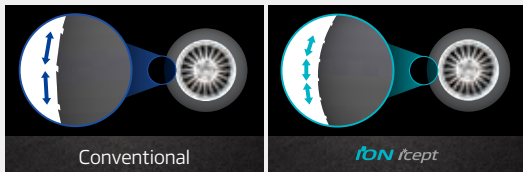

Charge Less, Cruise More

i Extreme Lightness

Further reduced rolling resistance

Opti Cure

The iON i*cept (and SUV) achieved a decent grade in LRR performance by applying an advanced compound and Hankook tire's optimized curing technology which improves all parts of the tire equally.




Handle the Winter

i Perfect Grip

Enhanced cornering stability

Grip Boost



Tire stiffness is essential to be improved to bear the weight of electric vehicles. Hankook's EV Contour Technology increases cornering stiffness by 7% to advance electric vehicle handling performance.

Improved snow traction

Optimized sipe angles



The angles of sipes on the iON i*cept (and SUV) are optimized to improve braking and traction on snow. The accuracy of sipe angles can significantly improve safety on snowy roads.

Superior handling on winter roads

Diversified sipes

The tread pattern rigidity is optimized by applying 2D sipes in the center and 3D sipes in the blocks surrounding. This allows the iON i*cept (and SUV) to provide superior handling on all types of winter road surfaces.



Improved wet grip

Water pipe kerf



Water pipe kerfs are placed inside the shoulder blocks for water drainage from the main groove, which maximizes grip on wet roads.

ION *Nordic ice** (IW04)

ION *Nordic ice** **SUV** (IW04A)

Evolutionized to perform in extreme winter conditions



Drive in Peace

i Sound Absorber


Minimized stud noise Stud Noise AI Analysis

The iON Nordic ice (and iON Nordic ice SUV) emits lower stud noise given it's optimal stud pin array by applying AI calculations.



2% less than Market standard product for ICEV

Minimized pattern noise V-Shaped Shifting Pattern



The V-shaped tread pattern of the iON Nordic ice (and iON Nordic ice SUV) spreads road noise by the shifting between the inside and outside blocks during road contact.

4dB less than Market standard product for ICEV

Go Further to Experience More

i Extreme Lightness

Extended range and even tread wear Lightweight & Opti Cure

The iON Nordic ice (and iON Nordic ice SUV) achieves better LRR performance by applying lightweight design technology and Hankook tire's Opti Cure technology.




Be in Complete Control in Winter

i Perfect Grip

Excellent grip in icy conditions Optimized Stud Pins

By maximizing the number of studs driver will experience improved Ice grip performance.

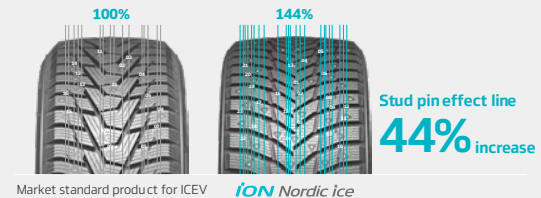

Advanced handling in snowy conditions High Density + One Directional Sipe

Experience improved snow traction & braking as a result of high density and the one directional sipe on the center block.



i Super Mileage

Extended range and even tread wear Lightweight & Opti Cure

Tires on electric vehicles wear out approximately 20% faster with uneven wear than on ICE vehicles. Designed to spread the ground pressure evenly, the iON Nordic ice (and iON Nordic ice SUV) ensures longer usage and requires fewer replacements.



The iON Nordic ice (and iON Nordic ice SUV) achieves better LRR performance by applying lightweight design technology and Hankook tire's Opti Cure technology.

Available Sizes

iON evo AS | IH01

EV High Performance All-Season

Inch	S-Code	Size	LI/SS	Sidewall	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Depth	Revs/ Mile	Weight	UTQG	Tech	Original Equipment
						psi	lbs								
18	1034220	225/55R18 XL	102W	BSW	6.0-8.0	50	1,874	27.7	9.4	10.0	749	27.4	600/A/A		
	1033208	235/45R18 XL	98W	BSW	7.5-9.0	50	1,653	26.2	9.3	10.0	792	25.0	600/A/A		
19	1032966	215/50R19 XL	97H	BSW	6.0-7.5	50	1,609	27.4	9.5	9.0	759	24.3	600/A/A	EV, SOA	Kia EV3 ('24-'30)
	1033204	235/40R19 XL	96W	BSW	8.0-9.5	50	1,565	26.2	9.5	10.0	794	23.6	600/A/A		
	1034368	245/40R19 XL	98Y	BSW	8.0-9.5	50	1,653	26.5	9.8	10.0	783	25.0	600/A/A		
	1033548	245/45R19 XL	102H	BSW	7.5-9.0	50	1,874	27.6	10.0	9.0	754	24.6	560/A/A	EV	BMW 3/5 series, iX 1/2 ('26-'35)
	1033203	245/45R19 XL	102W	BSW	7.5-9.0	50	1,874	27.6	9.6	10.0	754	28.7	600/A/A		
	1034360	255/40R19 XL	100Y	BSW	8.5-10.0	50	1,764	26.8	10.2	10.0	775	26.5	600/A/A		
	1034384	285/40R19 XL	107Y	BSW	9.5-11.0	50	2,149	27.8	11.3	10.0	747	31.4	600/A/A		
	1033206	235/35R20 XL	92Y	BSW	8.0-9.5	50	1,389	26.3	9.5	10.0	791	22.9	600/A/A		
20	1034367	245/40R20 XL	99W	BSW	8.0-9.5	50	1,709	27.4	9.8	10.0	758	25.9	600/A/A		
	1034218	255/35R20 XL	97Y	BSW	8.5-10.0	50	1,609	26.8	10.2	10.0	775	26.3	600/A/A		
	1034216	285/30R20 XL	99Y	BSW	9.5-10.5	50	1,709	26.6	11.4	10.0	782	28.8	600/A/A		
	1033205	245/35R21 XL	96Y	BSW	8.0-9.5	50	1,565	27.5	9.8	10.0	755	25.2	600/A/A		
21	1033207	265/35R21 XL	101Y	BSW	9.0-10.5	50	1,819	28.1	10.6	10.0	740	28.1	600/A/A		
	1034363	265/40R21 XL	105Y	BSW	9.0-10.5	50	2,039	29.0	10.6	10.0	716	31.6	600/A/A		
	1034533	295/30R21 XL	102Y	BSW	10.0-11.0	50	1,874	27.8	11.8	10.0	748	31.7	600/A/A		

iON evo AS SUV | IH01A

EV High Performance All-Season

Inch	S-Code	Size	LI/SS	Sidewall	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Depth	Revs/ Mile	Weight	UTQG	Tech	Original Equipment
						psi	lbs								
17	1032883	215/50R17 XL	95V	BSW	6.5-7.5	50	1,521	25.4	9.4	10.0	818	24.2	600/A/A		
18	1033187	225/60R18 XL	104V	BSW	6.0-8.0	50	1,984	28.4	9.4	10.0	730	29.9	600/A/A		
	1035617	235/55R18 XL	104H	BSW	6.5-8.5	50	1,984	28.3	10.0	8.0	735	25.8	500/A/A	EV, SOA	
	1034369	235/55R18 XL	104W	BSW	6.5-8.5	50	1,984	28.2	9.8	10.0	737	30.2	600/A/A		
	1033170	235/60R18 XL	107V	BSW	6.5-8.5	50	2,149	29.2	9.8	10.0	710	32.3	600/A/A		
19	1033186	225/55R19 XL	103V	BSW	6.0-8.0	50	1,929	28.6	9.4	10.0	727	30.3	600/A/A		
	1032882	235/50R19 XL	103W	BSW	6.5-8.5	50	1,929	28.2	10.1	10.0	735	30.2	600/A/A		
	1037495	235/55R19 XL	105V	BSW	6.5-8.5	50	2,039	29.0	10.2	8.5	716	28.7	600/A/A	EV, SOA	Kia Sorento ('25-'31)
	1033214	235/55R19 XL	105V	BSW	6.5-8.5	50	2,039	29.1	9.8	10.0	713	31.5	600/A/A		
	1033215	255/45R19 XL	104W	BSW	8.0-9.5	50	1,984	28.0	10.0	10.0	742	30.7	600/A/A		
	1034327	255/50R19 XL	107V	BSW	7.0-9.0	50	2,149	29.1	10.8	10.0	715	33.0	600/A/A		
	1034362	255/55R19 XL	111Y	BSW	7.0-9.0	50	2,403	30.0	10.7	10.0	693	35.4	600/A/A		
	1033164	255/60R19 XL	113V	BSW	7.0-9.0	50	2,535	31.0	10.6	10.0	670	37.5	600/A/A		
20	1034219	235/45R20 XL	100W	BSW	7.5-9.0	50	1,764	28.3	9.3	10.0	735	28.0	600/A/A		
	1033209	235/50R20 XL	104W	BSW	6.5-8.5	50	1,984	29.2	10.1	10.0	712	31.3	600/A/A		
	1034312	235/60R20 XL	108V	BSW	6.5-8.5	50	2,205	31.1	9.6	10.0	668	34.0	600/A/A		
	1033185	245/45R20 XL	103Y	BSW	7.5-9.0	50	1,929	28.5	9.6	10.0	729	31.3	600/A/A		
	1035069	255/40R20 XL	101V	BSW	8.5-10.0	50	1,819	28.0	10.3	8.5	743	27.3	540/A/A	EV, SOA	
	1033165	255/40R20 XL	101W	BSW	8.5-10.0	50	1,819	27.9	10.2	10.0	743	29.1	600/A/A		
	1033168	255/45R20 XL	105Y	BSW	8.0-9.5	50	2,039	29.0	10.0	10.0	717	32.2	600/A/A		
	1034365	255/50R20 XL	109W	BSW	7.0-9.0	50	2,271	30.0	10.8	10.0	693	34.4	600/A/A		

Inch	S-Code	Size	LI/SS	Sidewall	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Depth	Revs/ Mile	Weight	UTQG	Tech	Original Equipment
						psi	lbs								
	1033171	265/45R20 XL	108V	BSW	8.5-10.0	50	2,205	29.2	10.4	10.0	710	33.2	600/A/A		Lucid Gravity ('24-'28)
	1032970	265/50R20 XL	111Y	BSW	7.5-9.5	50	2,403	30.2	10.9	9.5	687	35.6	600/A/A	EV, SOA	
	1033172	275/45R20 XL	110V	BSW	8.5-10.5	50	2,337	29.6	11.0	10.0	701	34.8	600/A/A		
	1033212	275/50R20 XL	113V	BSW	7.5-9.5	50	2,535	30.9	11.7	10.0	673	37.2	600/A/A		
21	1033167	235/45R21 XL	101Y	BSW	7.5-9.0	50	1,819	29.1	9.3	10.0	714	29.8	600/A/A		Kia EV9 ('23-'29) Lucid Gravity ('24-'28)
	1038575	255/35R21 XL	98W	BSW	8.5-10.0	50	1,653	27.8	10.2	8.5	748	27.9	540/A/A	EV, SOA	
	1033202	255/40R21 XL	102Y	BSW	8.5-10.0	50	1,874	28.9	10.2	10.0	718	31.1	600/A/A		
	1034217	255/50R21 XL	109Y	BSW	7.0-9.0	50	2,271	31.0	10.8	10.0	670	36.6	600/A/A		
	1034366	265/45R21 XL	108Y	BSW	8.5-10.0	50	2,205	30.2	10.4	10.0	689	35.0	600/A/A		Kia EV9 ('23-'29) Lucid Gravity ('24-'28)
	1038577	275/35R21 XL	103W	BSW	9.0-11.0	50	1,929	28.3	10.9	10.0	733	31.7	600/A/A	EV, SOA	
	1034359	275/40R21 XL	107Y	BSW	9.0-11.0	50	2,149	29.5	10.9	10.0	705	32.8	600/A/A		
	1033166	285/40R21 XL	109H	BSW	9.5-11.0	50	2,271	29.7	11.3	10.0	699	34.8	600/A/A		
	1031525	285/45R21 XL	113V	BSW	9.0-10.5	50	2,535	30.9	11.5	9.0	673	37.1	600/A/A	EV, SOA	Kia EV9 ('23-'29) Lucid Gravity ('24-'28)
	1032971	285/45R21 XL	113Y	BSW	9.0-10.5	50	2,535	30.9	11.0	9.5	673	35.6	600/A/A	EV, SOA	
22	1033210	265/35R22 XL	102W	BSW	9.0-10.5	50	1,874	29.1	10.6	10.0	713	30.8	600/A/A		
	1034454	275/40R22 XL	107H	BSW	9.0-11.0	50	2,149	30.4	11.1	9.5	683	33.8	460/A/A	EV, SOA	
	1034361	275/40R22 XL	107Y	BSW	9.0-11.0	50	2,149	30.5	10.9	10.0	681	34.1	600/A/A		BMW iX ('25-'28)
	1033211	285/35R22 XL	106W	BSW	9.5-11.0	50	2,094	29.8	11.3	10.0	697	33.7	600/A/A		

Technical data subject to change without prior notice.

Overall Diameter, Section Width, Tread Depth in inches. Weight in lbs.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

Mileage, Road Hazard, and 30 Day Free Trial warranties apply only to replacement tires. Original Equipment tires are excluded.

Tech : Hankook Innovative Technology HRS : Hankook HRS System SOA : Sound Absorber SEG : Sealguard EV : Electric Vehicle

Available Sizes

iON HT | IHT01

EV Highway Terrain

Inch	S-Code	Size	LI/SS	Sidewall	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Depth	Revs/ Mile	Weight	UTQG	Tech
						psi	lbs							
18	1036115	275/65R18	XL	116H	BSW	7.5-9.5	50	2,756	32.1	11.1	12.5	648	41.3	900/A/A EV
20	1036112	275/60R20	XL	116T	BSW	7.5-9.5	50	2,756	33.0	11.4	12.5	630	43.7	900/A/A EV
	1036113	275/65R20	XL	116H	BSW	7.5-9.5	50	2,756	34.1	11.1	12.5	610	44.2	900/A/A EV
21	1036114	275/55R21	XL	116H	BSW	7.5-9.5	50	2,756	32.8	11.6	12.0	634	44.0	900/A/A EV
22	1036116	HL275/50R22	XL	116H	BSW	7.5-9.5	50	2,756	32.7	11.8	11.5	636	43.4	900/A/A EV

iON evo | IK01

EV High Performance Summer

Inch	S-Code	Size	LI/SS	Sidewall	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Depth	Revs/ Mile	Weight	UTQG	Tech	Original Equipment
						psi	lbs								
18	1033445	235/45ZR18	XL	98W	BSW	7.5-9.0	50	1,653	26.1	9.3	8.5	795	23.0	320/AA/AEV, SOA	
19	1035676	225/55R19	XL	103H	BSW	6.0-8.0	50	1,929	28.8	9.9	8.0	721	24.4	320/A/A EV	Ford Mustang Mach-e ('25-'27)
	1031912	225/55R19	XL	103H	BSW	6.0-8.0	50	1,929	28.8	9.9	8.0	721	24.6	320/A/A EV	Audi A6 e-tron ('24-'29)
	1033432	245/45ZR19	XL	102Y	BSW	7.5-9.0	50	1,874	27.5	10.0	8.5	754	26.6	320/AA/AEV, SOA	
	1031913	245/50R19	XL	105H	BSW	7.0-8.5	50	2,039	28.7	10.0	8.0	725	27.6	300/A/A EV	Audi A6 e-tron ('24-'29)
20	1033439	235/35ZR20	XL	92Y	BSW	8.0-9.5	50	1,389	26.3	9.6	8.5	789	22.8	320/AA/AEV, SOA	
	1031280	245/35R20	XL	95Y	BSW	8.0-9.5	50	1,521	26.7	10.4	7.0	779	23.3	300/A/A EV	BMW 4-Series/i4 ('25-'28)
	1033441	245/45ZR20	XL	103Y	BSW	7.5-9.0	50	1,929	28.5	9.7	8.5	729	27.8	320/AA/AEV, SOA	
	1031281	255/35R20	XL	97Y	BSW	8.5-10.0	50	1,609	26.9	10.6	7.5	772	24.4	320/A/A EV	BMW 4-Series/i4 ('25-'28)
	1033437	285/40ZR20	XL	108Y	BSW	9.5-11.0	50	2,205	28.8	11.3	8.5	721	31.3	320/AA/AEV, SOA	
21	1033440	245/35ZR21	XL	96Y	BSW	8.0-9.5	50	1,565	27.6	9.8	8.5	753	25.0	320/AA/AEV, SOA	
	1034660	245/40R21	XL	100Y	BSW	8.0-9.5	50	1,764	28.7	10.2	8.5	724	27.3	TBD EV, SOA	Audi A6 e-tron ('24-'28)
	1032085	245/40R21	XL	100Y	BSW	8.0-9.5	50	1,764	28.7	10.6	8.5	724	28.8	320/A/A EV, SOA	Porsche Taycan ('23-'30)
	1033454	265/35ZR21	XL	101Y	BSW	9.0-10.5	50	1,819	28.1	10.6	8.5	738	27.4	320/AA/AEV, SOA	
	1034661	275/35R21	XL	103Y	BSW	9.0-11.0	50	1,929	28.5	11.5	7.5	728	29.6	TBD EV, SOA	Audi A6 e-tron ('24-'28)
	1032084	285/35R21	XL	105Y	BSW	9.5-11.0	50	2,039	28.5	12.0	8.0	728	32.8	320/A/A EV, SOA	Porsche Taycan ('23-'30)
	1033451	305/30ZR21	XL	104Y	BSW	10.5-11.5	50	1,984	28.1	12.2	8.5	740	29.6	320/AA/AEV, SOA	

Technical data subject to change without prior notice.

Overall Diameter, Section Width, Tread Depth in inches. Weight in lbs.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

Mileage, Road Hazard, and 30 Day Free Trial warranties apply only to replacement tires. Original Equipment tires are excluded.

Tech : Hankook Innovative Technology HRS : Hankook HRS System SOA : Sound Absorber SEG : Sealguard EV : Electric Vehicle

Inch	S-Code	Size	LI/SS	Sidewall	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Depth	Revs/ Mile	Weight	UTQG	Tech	Original Equipment	
						psi	lbs									
18	1033433	235/65R18	XL	110V	BSW	6.5-8.5	50	2,337	29.8	9.5	8.5	697	30.1	320/AA/A	EV, SOA	
19	1033452	235/55ZR19	XL	105Y	BSW	6.5-8.5	50	2,039	29.0	9.8	8.5	716	29.5	320/AA/A	EV, SOA	
20	1033446	245/50R20	XL	105V	BSW	7.0-8.5	50	2,039	29.5	10.5	8.5	704	30.6	320/AA/A	EV, SOA	
	1033434	255/40ZR20	XL	101W	BSW	8.5-10.0	50	1,819	27.9	10.2	8.5	746	27.1	320/AA/A	EV, SOA	
	1031846	255/45R20	XL	105Y	BSW	8.0-9.5	50	2,039	28.9	10.2	6.0	720	26.5	240/A/A	EV	BMW X3/X4 ('25-'30)
	1033224	255/45R20	XL	105W	BSW	8.0-9.5	50	2,039	28.9	10.2	6.5	720	25.4	240/A/A	EV	BMW X3/X4 ('25-'30)
	1033453	255/45ZR20	XL	105Y	BSW	8.0-9.5	50	2,039	28.9	10.1	8.5	720	29.3	320/AA/A	EV, SOA	
	1031924	255/55R20	XL	110Y	BSW	7.0-9.0	50	2,337	30.6	10.7	8.5	680	33.7	280/AA/A	EV	Porsche Cayenne ('25)
	1031927	305/45R20	XL	116Y	BSW	9.5-11.5	50	2,756	30.7	12.9	8.0	675	39.8	260/AA/A	EV	Porsche Cayenne ('25)
21	1033450	255/35ZR21	XL	98W	BSW	8.5-10.0	50	1,653	27.8	10.2	8.5	746	27.2	320/AA/A	EV, SOA	
	1031848	255/40R21	XL	102Y	BSW	8.5-10.0	50	1,874	28.9	10.2	6.5	720	26.3	260/A/A	EV	BMW X3/X4 ('25-'30)
	1033436	275/35ZR21	XL	103Y	BSW	9.0-11.0	50	1,929	28.4	10.9	8.5	731	28.4	320/AA/A	EV, SOA	
	1031850	275/40R21	XL	107Y	BSW	9.0-11.0	50	2,149	29.4	11.1	7.0	707	30.6	300/A/A	EV	BMW X3/X4 ('25-'30)
	1031926	275/45R21	XL	110Y	BSW	8.5-10.5	50	2,337	30.2	11.0	7.5	689	32.3	280/AA/A	EV	Porsche Cayenne ('25)
	1031925	315/40R21	XL	115Y	BSW	10.5-12.5	50	2,679	30.4	13.1	8.5	683	38.0	260/AA/A	EV	Porsche Cayenne ('25)
22	1031856	255/35R22	XL	99Y	BSW	8.5-10.0	50	1,709	28.8	10.3	6.5	722	25.2	280/A/A	EV	BMW X3/X4 ('25-'30)
	1033449	255/40R22	XL	103V	BSW	8.5-10.0	50	1,929	29.9	10.2	8.5	696	29.9	320/AA/A	EV, SOA	
	1031858	275/35R22	XL	104Y	BSW	9.0-11.0	50	1,984	29.3	11.1	7.5	708	28.8	200/A/A	EV	BMW X3/X4 ('25-'30)
	1031875	275/40R22	XL	107Y	BSW	9.0-11.0	50	2,149	30.4	11.1	7.5	683	32.0	320/A/A	EV, SOA	BMW iX ('25-'28)
23	1031879	HL275/35R23	XL	108Y	BSW	9.0-11.0	50	2,205	30.3	11.1	8.0	685	32.5	340/A/A	EV, SOA	BMW iX ('25-'28)

Technical data subject to change without prior notice.

Overall Diameter, Section Width, Tread Depth in inches. Weight in lbs.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

Mileage, Road Hazard, and 30 Day Free Trial warranties apply only to replacement tires. Original Equipment tires are excluded.

Tech : Hankook Innovative Technology HRS : Hankook HRS System SOA : Sound Absorber SEG : Sealguard EV : Electric Vehicle

Available Sizes

iON i*cept | IW01

EV Winter Studless

Inch	S-Code	Size	LI/SS	Sidewall	Rim Width Range	Max. Load			Overall Diameter	Section Width	Tread Depth	Revs/ Mile	Weight	Tech
						psi	lbs							
18	1033369	215/55R18	SL	95H	BSW	6.0-7.5	51	1,521	27.1	9.2	10.5	767	23.5	EV, SOA, 3PMSF
	1033407	235/45R18	XL	98V	BSW	7.5-9.0	50	1,653	26.2	9.3	10.5	794	24.4	EV, SOA, 3PMSF
19	1033402	225/55R19	XL	103V	BSW	6.0-8.0	50	1,929	28.7	9.4	10.5	725	27.7	EV, SOA, 3PMSF
	1033391	235/40R19	XL	96V	BSW	8.0-9.5	50	1,565	26.1	9.5	10.5	795	22.6	EV, SOA, 3PMSF
	1034199	235/50R19	XL	103V	BSW	6.5-8.5	50	1,929	28.2	10.1	10.5	737	29.2	EV, SOA, 3PMSF
	1034208	245/40R19	XL	98V	BSW	8.0-9.5	50	1,653	26.6	9.8	10.5	782	24.9	EV, SOA, 3PMSF
	1033403	245/45R19	SL	98V	BSW	7.5-9.0	51	1,653	27.5	9.6	10.5	755	25.9	EV, SOA, 3PMSF
	1034185	255/40R19	XL	100V	BSW	8.5-10.0	50	1,764	26.6	10.2	10.5	782	25.6	EV, SOA, 3PMSF
	1033396	275/45R19	XL	108V	BSW	8.5-10.5	50	2,205	28.7	11.1	10.5	725	32.4	EV, SOA, 3PMSF
	1033405	235/35R20	XL	92V	BSW	8.0-9.5	50	1,389	26.2	9.5	10.5	793	23.0	EV, SOA, 3PMSF
20	1034205	245/40R20	XL	99V	BSW	8.0-9.5	50	1,709	27.5	9.8	10.5	755	25.9	EV, SOA, 3PMSF
	1033401	245/45R20	XL	103V	BSW	7.5-9.0	50	1,929	28.5	9.6	10.5	729	29.2	EV, SOA, 3PMSF
	1034187	255/35R20	XL	97V	BSW	8.5-10.0	50	1,609	26.5	10.2	10.5	785	25.7	EV, SOA, 3PMSF
	1033400	285/40R20	XL	108V	BSW	9.5-11.0	50	2,205	28.8	11.4	10.5	721	33.8	EV, SOA, 3PMSF
	1033395	245/35R21	XL	96V	BSW	8.0-9.5	50	1,565	27.6	9.8	10.5	752	26.4	EV, SOA, 3PMSF
21	1033406	265/35R21	XL	101V	BSW	9.0-10.5	50	1,819	28.2	10.7	10.5	737	28.3	EV, SOA, 3PMSF
	1034203	265/40R21	XL	105V	BSW	9.0-10.5	50	2,039	29.1	10.7	10.5	714	30.7	EV, SOA, 3PMSF
	1033404	305/30R21	XL	104V	BSW	10.5-11.5	50	1,984	28.0	12.3	10.5	741	32.8	EV, SOA, 3PMSF
	1034204	265/35R22	XL	102V	BSW	9.0-10.5	50	1,874	29.1	10.7	10.5	713	29.5	EV, SOA, 3PMSF

iON i*cept SUV | IW01A

EV Winter Studless

Inch	S-Code	Size	LI/SS	Sidewall	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Depth	Revs/ Mile	Weight	Tech	
						psi	lbs							
17	1034193	215/55R17	XL	98V	BSW	6.0-7.5	50	1,653	26.2	9.2	10.5	792	24.4	EV, SOA, 3PMSF
18	1034197	235/55R18	XL	104V	BSW	6.5-8.5	50	1,984	28.1	9.8	10.5	740	28.7	EV, SOA, 3PMSF
	1033382	235/60R18	SL	103H	BSW	6.5-8.5	51	1,929	28.9	9.6	10.5	719	28.6	EV, SOA, 3PMSF
	1033393	235/65R18	XL	110V	BSW	6.5-8.5	50	2,337	29.8	9.6	10.5	697	29.3	EV, SOA, 3PMSF
19	1033398	235/55R19	XL	105V	BSW	6.5-8.5	50	2,039	28.9	9.8	10.5	720	28.5	EV, SOA, 3PMSF
	1033383	255/45R19	XL	104V	BSW	8.0-9.5	50	1,984	27.9	10.0	10.5	744	30.9	EV, SOA, 3PMSF
	1033381	255/50R19	XL	107H	BSW	7.0-9.5	50	2,149	28.9	11.0	10.5	718	30.6	EV, SOA, 3PMSF
	1033392	255/55R19	XL	111V	BSW	7.0-9.0	50	2,403	29.9	10.7	10.5	694	32.4	EV, SOA, 3PMSF
	1034425	255/60R19	XL	113V	BSW	7.0-9.0	50	2,535	31.0	10.6	10.5	671	35.4	EV, SOA, 3PMSF
	20	1034200	235/45R20	XL	100V	BSW	7.5-9.0	50	1,764	28.0	9.3	10.5	741	26.9
1033390		235/50R20	SL	100V	BSW	6.5-8.5	51	1,764	29.1	10.1	10.5	713	29.5	EV, SOA, 3PMSF
1034188		235/60R20	XL	108V	BSW	6.5-8.5	50	2,205	31.0	9.6	10.5	669	32.7	EV, SOA, 3PMSF
1033389		245/50R20	XL	105V	BSW	7.0-8.5	50	2,039	29.5	10.6	10.5	703	30.5	EV, SOA, 3PMSF
1033387		255/40R20	XL	101V	BSW	8.5-10.0	50	1,819	27.8	10.2	10.5	747	27.8	EV, SOA, 3PMSF
1033399		255/45R20	XL	105V	BSW	8.0-9.5	50	2,039	28.9	10.0	10.5	718	32.4	EV, SOA, 3PMSF
1033375		255/50R20	XL	109H	BSW	7.0-9.0	50	2,271	29.9	11.0	10.5	694	32.5	EV, SOA, 3PMSF
1034206		265/45R20	XL	108V	BSW	8.5-10.0	50	2,205	29.1	10.5	10.5	713	33.8	EV, SOA, 3PMSF
1034207		275/45R20	XL	110V	BSW	8.5-10.5	50	2,337	29.5	11.1	10.5	705	33.7	EV, SOA, 3PMSF
1034424		275/50R20	XL	113V	BSW	7.5-9.5	50	2,535	30.6	11.7	10.5	679	37.4	EV, SOA, 3PMSF

iON i*cept SUV | IW01A

EV Winter Studless

Inch	S-Code	Size		LI/SS	Sidewall	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Depth	Revs/ Mile	Weight	Tech
							psi	lbs						
21	1033384	235/45R21	XL	101V	BSW	7.5-9.0	50	1,819	29.1	9.3	10.5	713	28.2	EV, SOA, 3PMSF
	1033385	255/35R21	XL	98V	BSW	8.5-10.0	50	1,653	27.8	10.2	10.5	747	27.3	EV, SOA, 3PMSF
	1033397	255/40R21	XL	102V	BSW	8.5-10.0	50	1,874	28.8	10.2	10.5	721	29.0	EV, SOA, 3PMSF
	1033371	265/45R21	XL	108H	BSW	8.5-10.0	50	2,205	30.3	10.5	10.5	687	34.0	EV, SOA, 3PMSF
	1033388	275/35R21	XL	103V	BSW	9.0-11.0	50	1,929	28.4	10.9	10.5	732	31.0	EV, SOA, 3PMSF
	1034184	275/40R21	XL	107V	BSW	9.0-11.0	50	2,149	29.3	10.9	10.5	708	33.4	EV, SOA, 3PMSF
	1034183	285/40R21	XL	109V	BSW	9.5-11.0	50	2,271	29.7	11.3	10.5	699	35.4	EV, SOA, 3PMSF
	1034426	285/45R21	XL	113V	BSW	9.0-10.5	50	2,535	30.9	11.5	10.5	673	37.3	EV, SOA, 3PMSF
22	1033374	255/40R22	XL	103V	BSW	8.5-10.0	50	1,929	29.8	10.2	10.5	696	30.2	EV, SOA, 3PMSF
	1033376	265/40R22	XL	106H	BSW	9.0-10.5	50	2,094	30.1	10.7	10.5	689	32.3	EV, SOA, 3PMSF
	1034190	275/40R22	XL	107V	BSW	9.0-11.0	50	2,149	30.5	10.9	10.5	680	34.4	EV, SOA, 3PMSF
	1033386	285/35R22	XL	106V	BSW	9.0-10.5	50	2,094	29.7	11.4	10.5	700	34.4	EV, SOA, 3PMSF

iON Nordic Ice | IW04

EV Winter Studded

S-Code							Max. Load						Weight			
Inch	Non-Stud	Factory Stud	Size	LI/SS	Sidewall	Rim Width Range	psi	lbs	Overall Diameter	Section Width	Tread Depth	Revs/ Mile	Non-Stud	Factory Stud	Tech	
20	1034984	1035026	245/40R20	XL	99T	BSW	8.0-9.5	50	1,709	27.4	10.1	11.0	757	26.2	26.6	3PMSF

iON Nordic Ice SUV | IW04A

EV Winter Studded

S-Code								Max. Load						Weight			
Inch	Non-Stud	Factory Stud	Size	LI/SS	Sidewall	Rim Width Range	psi	lbs	Overall Diameter	Section Width	Tread Depth	Revs/ Mile	Non-Stud	Factory Stud	Tech		
19	1034977	1035028	235/40R19	XL	96T	BSW	8.0-9.5	50	1,565	26.1	9.8	11.0	795	24.2	24.7	3PMSF	
	1035004	1035011	255/45R19	XL	104H	BSW	8.0-9.5	50	1,984	27.8	10.4	11.0	747	30.5	30.9	3PMSF	
20	1034982	1035036	235/50R20	XL	104T	BSW	6.5-8.5	50	1,984	29.1	10.2	11.0	714	30.8	31.3	3PMSF	
	1035005	1035013	245/45R20	XL	103T	BSW	7.5-9.0	50	1,929	28.4	9.9	11.0	732	29.3	29.7	3PMSF	
	1034981	1035040	255/40R20	XL	101T	BSW	8.5-10.0	50	1,819	27.8	10.6	11.0	747	28.2	28.6	3PMSF	
	1034987	1035030	255/45R20	XL	105T	BSW	8.0-9.5	50	2,039	28.7	10.4	11.0	723	31.6	32.1	3PMSF	
	1035006	1035019	255/50R20	XL	109T	BSW	7.0-9.0	50	2,271	29.8	10.9	11.0	696	34.0	34.4	3PMSF	

Technical data subject to change without prior notice.

Overall Diameter, Section Width, Tread Depth in inches. Weight in lbs.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters Mileage, Road Hazard, and 30 Day Free Trial warranties apply only to replacement tires. Original Equipment tires are excluded.

Tech : Hankook Innovative Technology HRS : Hankook HRS System SOA : Sound Absorber SEG : Sealguard EV : Electric Vehicle



BRABUS

Official Technology Partner



ventus

CAR / SUV

Ventus evo (K137)

Ventus evo SUV (K137A)

Ventus S1 AS (H125)

Ventus V2 concept2 (H457)

About Hankook

Dynapro

iON

Ventus

Kinergy

WeatherFlex

Winter

Vantra

The Ventus Family

ventus
evo

Ultra-High Performance
Summer



**ventus
S1 AS**

Ultra-High Performance
All-Season



**ventus
V2 concept 2**

High Performance
All-Season



Ventus Products

Ventus offers a diverse lineup of tires designed to meet the needs of a wide range of drivers while maximizing driving performance across different vehicle types.

Ventus Products	<i>ventus evo</i>	
Pattern Design		
Fitment	Sporty sedans, Premium CUVs	
Characteristics	Wet Performance Braking & Cornering	
Wet	5	
Dry	4	
Snow		
Comfort	4	
Wear	3.5	

	ventus S1 AS	ventus V2 concept²
		
	Premium sedans & CUVs	Compact sedans, CUVs
	Snow Performance Stable Performance on all roads	Noise Safety
	4.5	4
	3.5	3
	5	4
	4	5
	4.5	4

ventus evo (K137)
ventus evo SUV (K137A)

Unmatched Sports Performance



Test & Design award



Warranty



Widening lateral grooves

Wet braking performance is improved by optimizing lateral shoulder grooves which secure voids when braking or under heavy loads, expanding the contact patch. Additionally, tie-bars applied to the shoulder blocks create a closed structure that reduces noise in regular driving conditions.




Chamfer technology improves braking traction and uniformly distributes contact pressure

Chamfered design smooths tire edges for evenly distributed contact pressure and increased friction. Dry braking performance is greatly improved, 6% over our previous model.

Dry Braking Improved by 6%

compared to its predecessor



Optimized stiffness pattern



Maximized stiffness in the driving direction, particularly in the outside blocks, enhances grip on dry roads.

Superior transverse drainage

The high-performance drainage design controls block deformation to improve contact with the road. Safer wet road driving is achieved by minimizing tire contact gaps caused by concave deformation for 7% improved wet braking and 4% improved wet handling over the previous model.

Wet braking improved by 7%

compared to its predecessor



Wet handling improved by 4%

compared to its predecessor



Enhanced cornering stability

The flat side profile improves cornering stiffness for superior grip and stability, even at high speeds.



Uniform contact distributes pressure

Optimized tire shape and structure ensure balanced contact pressure distribution across the tread, promoting uniform wear and excellent mileage, even under heavy loads.

Mileage improved by 32%

compared to its predecessor



ventus S1^{AS} (H125)

Experience the sheer joy of driving in any weather




Warranty






New four-season high performance compound

This is Hankook Tire's new four-season compound designed for high-performance vehicles. A high concentration of silica was added to enhance the grip force on all surface conditions (wet & dry & snow).

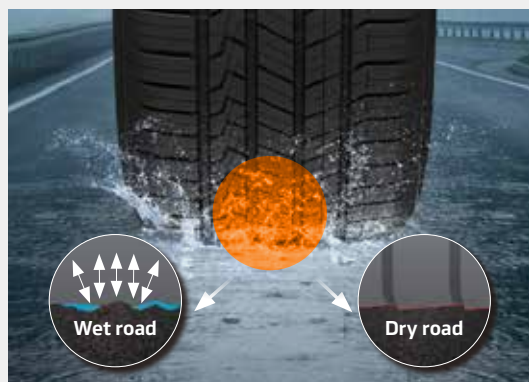


Excellent drainage in the transverse direction

It is designed to drain well while the block shape changes to convex during driving.

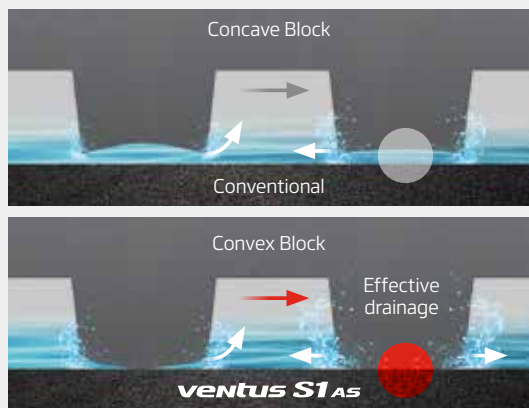


Applied shoulder chamfer

The shoulder chamfer maintains uniform grounding by suppressing the deformation of the block edge during driving. Uniform grounding improves dry performance by increasing grip on dry road surfaces.

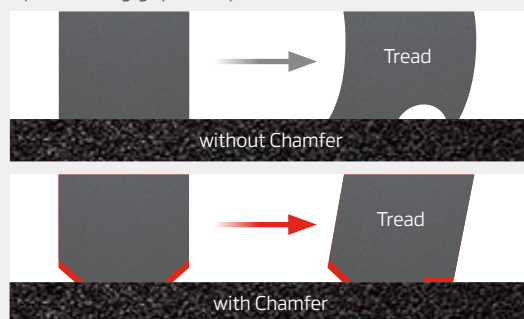


Wide outside block & high stiffness


Subjective dry handling test result



Dry handling performance is improved by the expanded outside shoulder block and increased lateral stiffness. A wider outside shoulder block ensures good dry handling performance, lateral stability, and steering response.

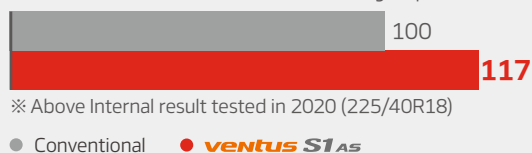

Wide lateral grooves



The 3% wider lateral grooves increase the void volume, which improves grip performance in the snow because it grabs more snow.

ventus V2 concept² (H457)

The new concept of driving



Test & Design award



Warranty



Aqua driving control



Wide 4-main grooves applied for better handling performance in wet conditions.


Noise care block applied



Control frictional noise with straight rib blocks on the shoulder.

Noise care block applied

Control frictional noise with straight rib blocks on the shoulder

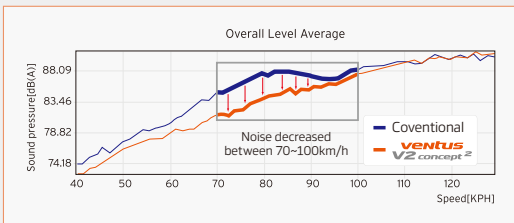

High-density nylon reinforced belt structure

Optimal high-density nylon reinforced belt maintains contact pressure when cornering and maximizes handling performance.



Expands the contact zone of the shoulder, compared to conventional tires, and improves handling performance.

Optimal kerf design



Control noise and extend mileage with uniform block stiffness.

3D Point effect on block edge part



Optimal handling and braking ability by improving block solidity and applying 3D point effect on the block edge.

Uneven wear protect system

Help to check tire's abnormal and uneven wear easily with the wear protect system.


Before Use



After Use (Regular Wear)



After Use (Irregular Wear)



VAI (Vehicle Alignment Indicator)

It is easy to gauge uneven wear by monitoring the depth of holes situated at the ends of both sides of the tire.

Available Sizes

Ventus evo | K137

Ultra-High Performance Summer

Inch	S-Code	Size		LI/SS	Sidewall	Rim Width	Max. Load		Overall Diameter	Section Width	Tread Depth	Revs/ Mile	Weight	UTQG	Tech	Original Equipment
							Range	psi lbs								
17	1035168	205/45R17	XL	88W	BSW	6.5-7.5	50	1,235	24.0	8.2	9.5	866	17.6	340/AA/A		
	1036809	215/45ZR17	XL	91Y	BSW	7.0-8.0	50	1,356	24.3	8.4	9.5	855	19.4	340/AA/A		
	1035221	225/45ZR17	XL	94Y	BSW	7.0-8.5	50	1,477	24.9	8.9	9.5	835	22.0	340/AA/A		
	1031265	225/50R17	XL	98Y	BSW	6.0-8.0	50	1,653	25.8	9.8	7.5	805	22.7	200/A/A		BMW 3-Series ('25-'27)
	1031901	225/60R17	SL	99Y	BSW	6.0-8.0	51	1,709	27.6	9.3	6.5	754	21.6	280/A/A		Audi A6/A7 ('25-'29)
	1035167	245/45ZR17	XL	(99Y)	BSW	7.5-9.0	50	1,709	25.5	9.6	9.5	815	25.0	340/AA/A		
18	1035155	215/40ZR18	XL	89Y	BSW	7.0-8.5	50	1,279	24.6	8.6	9.5	844	19.1	340/AA/A		
	1035165	215/45ZR18	XL	93Y	BSW	7.0-8.0	50	1,433	25.5	8.4	9.5	815	20.3	340/AA/A		
	1034812	225/40R18	XL	92Y	BSW	7.5-9.0	50	1,389	24.9	9.8	8.0	834	21.9	280/A/A		Volkswagen Golf ('25-'30)
	1035215	225/40ZR18	XL	92Y	BSW	7.5-9.0	50	1,389	25.0	9.1	9.5	830	22.1	340/AA/A		
	1031266	225/45R18	XL	95Y	BSW	7.0-8.5	50	1,521	25.7	9.1	7.5	807	20.4	200/A/A		BMW 3-Series ('25-'27)
	1031046	225/45R18	XL	95Y	BSW	7.0-8.5	50	1,521	25.7	9.4	8.0	807	22.2	180/A/A		BMW 2 Series GT ('25-'29)
	1035154	235/40ZR18	XL	95Y	BSW	8.0-9.5	50	1,521	25.3	9.3	9.5	820	21.6	340/AA/A		
	1035151	245/35ZR18	XL	(92Y)	BSW	8.0-9.5	50	1,389	24.6	9.8	9.5	844	23.2	340/AA/A		
	1035153	245/40ZR18	XL	97Y	BSW	8.0-9.5	50	1,609	25.6	9.8	9.5	813	22.9	340/AA/A		
	1036825	245/45ZR18	XL	100Y	BSW	7.5-9.0	50	1,764	26.5	9.6	9.5	784	25.6	340/AA/A		
	1035166	245/50ZR18	XL	104Y	BSW	7.0-8.5	50	1,984	27.5	10.6	9.5	756	27.4	340/AA/A		
	1035150	255/35ZR18	XL	(94Y)	BSW	8.5-10.0	50	1,477	24.8	10.2	9.5	836	23.2	340/AA/A		
	1031267	255/40R18	XL	99Y	BSW	8.5-10.0	50	1,709	25.8	10.2	7.5	806	22.7	200/A/A		BMW 3-Series ('25-'27)
	1035157	255/45ZR18	XL	103Y	BSW	8.0-9.5	50	1,929	26.9	10.0	9.5	772	27.0	340/AA/A		
	1035149	265/35ZR18	XL	(97Y)	BSW	9.0-10.5	50	1,609	25.2	10.6	9.5	825	26.1	340/AA/A		
	1035163	275/35ZR18	XL	(99Y)	BSW	9.0-11.0	50	1,709	25.4	10.9	9.5	818	25.5	340/AA/A		
	1035152	275/40ZR18	XL	103Y	BSW	9.0-11.0	50	1,929	26.5	10.9	9.5	784	26.7	340/AA/A		
	1035148	285/35ZR18	XL	(101Y)	BSW	9.5-11.0	50	1,819	25.7	11.3	9.5	808	26.8	340/AA/A		
19	1035141	225/35ZR19	XL	(88Y)	BSW	7.5-9.0	50	1,235	25.2	9.1	9.5	826	21.5	340/AA/A		
	1035147	225/40ZR19	XL	(93Y)	BSW	7.5-9.0	50	1,433	25.9	9.1	9.5	801	22.5	340/AA/A		
	1036827	225/45ZR19	XL	96Y	BSW	7.0-8.5	50	1,565	26.8	8.9	9.5	775	24.0	340/AA/A		
	1034813	235/35R19	XL	91Y	BSW	8.0-9.5	50	1,356	25.4	10.2	8.0	819	21.6	280/A/A		Volkswagen Golf ('25-'30)
	1035140	235/35ZR19	XL	(91Y)	BSW	8.0-9.5	50	1,356	25.4	9.5	9.5	818	22.2	340/AA/A		
	1035146	235/40ZR19	XL	(96Y)	BSW	8.0-9.5	50	1,565	26.3	9.3	9.5	791	22.0	340/AA/A		
	1035139	245/35ZR19	XL	(93Y)	BSW	8.0-9.5	50	1,433	25.6	9.8	9.5	810	23.3	340/AA/A		
	1031895	245/40R19	XL	98Y	BSW	8.0-9.5	50	1,653	26.6	10.6	8.0	782	27.4	240/A/A	HRS	Audi A4 / A5 ('24-'29)
	1035705	245/45R19	XL	102Y	BSW	7.5-9.0	50	1,874	27.7	10.1	8.0	750	24.7	300/A/A		Audi A6/A7 ('25-'29)
	1035136	255/30ZR19	XL	(91Y)	BSW	8.5-9.5	50	1,356	24.9	10.2	9.5	833	22.6	340/AA/A		
	1035138	255/35ZR19	XL	(96Y)	BSW	8.5-10.0	50	1,565	25.9	10.2	9.5	803	23.6	340/AA/A		
	1035145	255/40ZR19	XL	(100Y)	BSW	8.5-10.0	50	1,764	26.9	10.2	9.5	772	24.9	340/AA/A		
	1036828	255/45ZR19	XL	104Y	BSW	8.0-9.5	50	1,984	27.9	10.0	9.5	744	28.5	340/AA/A		
	1035224	265/30ZR19	XL	(93Y)	BSW	9.0-10.0	50	1,433	25.2	10.6	9.5	826	23.8	340/AA/A		
	1035220	265/35ZR19	XL	98Y	BSW	9.0-10.5	50	1,653	26.2	10.6	9.5	793	26.2	340/AA/A		
	1035144	265/40ZR19	XL	102Y	BSW	9.0-10.5	50	1,874	27.2	10.6	9.5	763	26.0	340/AA/A		
	1035135	275/30ZR19	XL	(96Y)	BSW	9.0-10.0	50	1,565	25.5	10.9	9.5	815	25.1	340/AA/A		
	1035137	275/35ZR19	XL	(100Y)	BSW	9.0-11.0	50	1,764	26.4	10.9	9.5	786	26.6	340/AA/A		
	1035143	275/40ZR19	XL	(105Y)	BSW	9.0-11.0	50	2,039	27.5	10.9	9.5	755	28.6	340/AA/A		
	1035134	285/30ZR19	XL	(98Y)	BSW	9.5-10.5	50	1,653	25.6	11.4	9.5	812	26.2	340/AA/A		
	1035160	285/35ZR19	XL	(103Y)	BSW	9.5-11.0	50	1,929	26.7	11.3	9.5	777	27.8	340/AA/A		

Technical data subject to change without prior notice.

Overall Diameter, Section Width, Tread Depth in inches. Weight in lbs.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

Mileage, Road Hazard, and 30 Day Free Trial warranties apply only to replacement tires. Original Equipment tires are excluded.

Tech : Hankook Innovative Technology HRS : Hankook HRS System SOA : Sound Absorber SEG : Sealguard EV : Electric Vehicle

Ventus evo | K137

Ultra-High Performance Summer

Inch	S-Code	Size	LI/SS	Sidewall	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Depth	Revs/ Mile	Weight	UTQG	Tech	Original Equipment
						psi	lbs								
20	1035213	235/35ZR20	XL	92(Y)	BSW	8.0-9.5	50	1,389	26.4	9.5	9.5	787	23.6	340/AA/A	
	1036831	245/30ZR20	XL	(90Y)	BSW	8.0-9.0	50	1,323	25.7	9.9	9.0	807	22.8	340/AA/A	
	1036832	245/35ZR20	XL	(95Y)	BSW	8.0-9.5	50	1,521	26.6	9.8	9.0	780	23.1	340/AA/A	
	1035133	245/40ZR20	XL	(99Y)	BSW	8.0-9.5	50	1,709	27.6	9.8	9.5	754	25.1	340/AA/A	
	1035211	255/30ZR20	XL	(92Y)	BSW	8.5-9.5	50	1,389	25.9	10.2	9.5	802	23.6	340/AA/A	
	1036833	255/35ZR20	XL	(97Y)	BSW	8.5-10.0	50	1,609	26.9	10.2	9.0	774	25.1	340/AA/A	
	1031906	255/40R20	XL	101Y	BSW	8.5-10.0	50	1,819	28.0	10.8	8.5	742	30.8	340/A/A	HRS, SOA Audi A6/A7 ('25-'29)
	1031929	255/40R20	XL	101Y	BSW	8.5-10.0	50	1,819	28.0	10.8	8.5	742	31.6	340/A/A	HRS Audi A6/A7 ('25-'29)
	1035222	275/30ZR20	XL	(97Y)	BSW	9.0-10.0	50	1,609	26.4	10.9	9.5	787	26.6	340/AA/A	
	1035212	275/35ZR20	XL	(102Y)	BSW	9.0-11.0	50	1,874	27.4	10.9	9.5	758	28.1	340/AA/A	
	1036839	285/30ZR20	XL	(99Y)	BSW	9.5-10.5	50	1,709	26.5	11.4	9.0	783	28.2	340/AA/A	
	1032613	HL245/35R20	XL	98Y	BSW	8.0-9.5	50	1,653	26.7	10.6	8.5	779	28.2	200/A/A	Audi A4/A5 ('25-'29)
21	1035208	245/35ZR21	XL	(96Y)	BSW	8.0-9.5	50	1,565	27.6	9.8	9.5	752	24.6	340/AA/A	
	1036056	245/40R21	XL	100Y	BSW	8.0-9.5	50	1,764	28.5	10.4	9.0	728	29.4	340/AA/A	Genesis G90 ('25-'30)
	1035207	275/30ZR21	XL	(98Y)	BSW	9.0-10.0	50	1,653	27.4	10.9	9.5	757	27.9	340/AA/A	
	1036058	275/35R21	XL	103Y	BSW	9.0-11.0	50	1,929	28.4	11.5	9.0	732	31.6	340/AA/A	Genesis G90 ('25-'30)

Ventus evo SUV | K137A

Ultra-High Performance Summer

Inch	S-Code	Size	LI/SS	Sidewall	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Depth	Revs/ Mile	Weight	UTQG	Original Equipment	
						psi	lbs								
18	1031954	235/50R18	XL	101H	BSW	6.5-8.5	50	1,819	27.2	10.5	8.0	762	23.5	220/A/A	Volkswagen T7 ('24-'28)
19	1031908	235/55R19	XL	105W	BSW	6.5-8.5	50	2,039	29.2	10.3	7.5	712	35.3	180/A/A	Audi Q5 ('25-'29)
	1035187	255/50ZR19	XL	107W	BSW	7.0-9.0	50	2,149	28.9	10.9	9.5	718	32.1	340/AA/A	
20	1035184	245/45ZR20	XL	103Y	BSW	7.5-9.0	50	1,929	28.5	9.6	9.5	729	28.1	340/AA/A	
	1031055	255/45R20	XL	105Y	BSW	8.0-9.5	50	2,039	28.9	10.4	7.5	720	29.1	140/A/A	BMW X3 ('25-'29)
	1031909	255/45R20	XL	105W	BSW	8.0-9.5	50	2,039	28.9	10.6	8.0	719	34.9	180/A/A	Audi Q5 ('25-'29)
	1035181	275/40ZR20	XL	106Y	BSW	9.0-11.0	50	2,094	28.5	10.9	9.5	729	30.1	340/AA/A	
	1031619	275/45R20	XL	110Y	BSW	8.5-10.5	50	2,337	29.8	11.1	7.5	698	32.4	200/A/A	BMW X5 PHEV ('23-'26)
	1031135	275/50R20	XL	113Y	BSW	7.5-9.5	50	2,535	30.7	11.4	8.0	675	33.3	200/A/A	Audi Q7/Q9 ('25-'30)
	1031621	305/40R20	XL	112Y	BSW	10.0-12.0	50	2,469	29.5	12.6	7.5	704	36.5	200/A/A	BMW X5 PHEV ('23-'26)
	1031623	275/40R21	XL	107Y	BSW	9.0-11.0	50	2,149	29.4	11.4	7.0	707	32.6	180/A/A	BMW X5 PHEV ('23-'26)
21	1031136	285/45R21	XL	113Y	BSW	9.0-10.5	50	2,535	31.0	11.7	8.0	669	35.1	200/A/A	Audi Q7/Q9 ('25-'30)
	1031625	315/35R21	XL	111Y	BSW	10.5-12.5	50	2,403	29.4	12.9	7.5	706	36.5	200/A/A	BMW X5 PHEV ('23-'26)
22	1032621	285/40R22	XL	110Y	BSW	9.5-11.0	50	2,337	30.8	12.3	8.5	674	38.6	200/A/A	Audi Q7/Q9 ('25-'30)
23	1032622	HL285/35R23	XL	110Y	BSW	9.5-11.0	50	2,337	30.8	12.1	8.5	675	37.4	200/AA/A	Audi Q7/Q9 ('25-'30)

Technical data subject to change without prior notice.

Overall Diameter, Section Width, Tread Depth in inches. Weight in lbs.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

Mileage, Road Hazard, and 30 Day Free Trial warranties apply only to replacement tires. Original Equipment tires are excluded.

Tech : Hankook Innovative Technology HRS : Hankook HRS System SOA : Sound Absorber SEG : Sealguard EV : Electric Vehicle

Available Sizes

Ventus S1 AS | H125

Ultra-High Performance All-Season

Inch	S-Code	Size	LI/SS	Sidewall	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Depth	Revs/ Mile	Weight	UTQG	Tech	Original Equipment
						psi	lbs								
16	1028504	205/55ZR16	SL	91W	BSW	5.5-7.5	51 1,356	24.7	8.7	10.0	841	19.2	560/AA/A		
17	1028505	205/50ZR17	XL	93W	BSW	5.5-7.5	50 1,433	24.9	8.9	10.0	833	19.7	560/AA/A		
	1028506	215/45ZR17	XL	91W	BSW	7.0-8.0	50 1,356	24.5	8.7	10.0	848	19.0	560/AA/A		
	1028507	215/50ZR17	XL	95W	BSW	6.0-7.5	50 1,521	25.3	9.2	10.0	820	21.5	560/AA/A		
	1026066	215/55ZR17	SL	94W	BSW	6.0-7.5	51 1,477	26.1	9.1	10.0	795	22.1	560/AA/A		
	1028508	225/45ZR17	XL	94Y	BSW	7.0-8.5	50 1,477	24.8	9.2	10.0	839	20.6	560/AA/A		
	1028509	225/50ZR17	XL	98W	BSW	6.0-8.0	50 1,653	25.7	9.6	10.0	808	22.7	560/AA/A		
	1028510	225/55ZR17	SL	97W	BSW	6.0-8.0	51 1,609	26.5	9.3	10.0	783	23.6	560/AA/A		
	1028656	235/45ZR17	XL	97W	BSW	7.5-9.0	50 1,609	25.2	9.6	10.0	826	22.8	560/AA/A		
	1028512	235/50ZR17	SL	96W	BSW	6.5-8.5	51 1,565	26.1	10.1	10.0	797	23.6	560/AA/A		
	1028513	235/55ZR17	SL	99W	BSW	6.5-8.5	51 1,709	26.9	9.9	10.0	771	24.8	560/AA/A		
	1028514	245/40ZR17	SL	91W	BSW	8.0-9.5	51 1,356	24.6	10.1	10.0	845	21.1	560/AA/A		
	1028515	245/45ZR17	XL	99Y	BSW	7.5-9.0	50 1,709	25.5	9.9	10.0	815	23.7	560/AA/A		
18	1028516	215/40ZR18	XL	89Y	BSW	7.0-8.5	50 1,279	24.6	8.9	10.0	844	19.5	560/AA/A		
	1028517	215/45ZR18	XL	93Y	BSW	7.0-8.0	50 1,433	25.5	8.7	10.0	815	20.6	560/AA/A		
	1028518	225/40ZR18	XL	92Y	BSW	7.5-9.0	50 1,389	24.9	9.4	10.0	833	22.3	560/AA/A		
	1028810	225/45R18H	XL	95H	BSW	7.0-8.5	50 1,521	25.7	9.4	10.0	808	23.0	620/A/A		BMW 2-Series ('24-'30)
	1028519	225/45ZR18	XL	95Y	BSW	7.0-8.5	50 1,521	25.7	9.2	10.0	807	22.3	560/AA/A		
	1028520	225/50ZR18	SL	95W	BSW	6.0-8.0	51 1,521	26.7	9.6	10.0	778	23.3	560/AA/A		
	1026893	225/55R18	XL	102H	BSW	6.0-8.0	50 1,874	27.8	10.0	9.5	747	26.5	620/A/A		BMW X1 ('22-'26) Hyundai Elantra N line ('20-'26)
	1028880	235/40R18	SL	91W	BSW	8.0-9.5	51 1,356	25.1	9.9	9.0	826	24.4	560/A/A	SOA	
	1028522	235/40ZR18	XL	95Y	BSW	8.0-9.5	50 1,521	25.2	9.8	10.0	823	22.7	560/AA/A		
	1030060	235/45R18	XL	98V	BSW	7.5-9.0	50 1,653	26.4	10.0	8.5	788	24.5	560/A/A	EV, SOA	
	1038485	235/45R18	XL	98V	BSW	7.5-9.0	50 1,653	26.4	10.0	9.0	788	24.0	560/A/A	EV	
	1028523	235/45ZR18	XL	98W	BSW	7.5-9.0	50 1,653	26.1	9.6	10.0	794	24.0	560/AA/A		
	1028524	235/50ZR18	SL	97W	BSW	6.5-8.5	51 1,609	27.0	10.0	10.0	768	24.8	560/AA/A		
	1028526	245/35ZR18	XL	92Y	BSW	8.0-9.5	50 1,389	24.6	10.1	10.0	844	21.9	560/AA/A		
	1028527	245/40ZR18	XL	97Y	BSW	8.0-9.5	50 1,609	25.6	9.9	10.0	812	24.1	560/AA/A		
	1026065	245/45ZR18	XL	100Y	BSW	7.5-9.0	50 1,764	26.5	9.9	10.0	783	26.0	560/AA/A		
	1028528	245/50ZR18	SL	100W	BSW	7.0-8.5	51 1,764	27.4	10.5	10.0	757	26.4	560/AA/A		
	1028529	245/55ZR18	SL	103W	BSW	7.0-8.5	51 1,929	28.3	10.4	10.0	733	29.2	560/AA/A		
	1028530	255/35ZR18	XL	94Y	BSW	8.5-10.0	50 1,477	24.8	10.6	10.0	836	22.9	560/AA/A		
	1028531	255/40ZR18	XL	99Y	BSW	8.5-10.0	50 1,709	25.8	10.6	10.0	804	25.0	560/AA/A		
	1028532	255/45ZR18	SL	99W	BSW	8.0-9.5	51 1,709	26.9	10.4	10.0	774	25.7	560/AA/A		
	1028533	265/35ZR18	XL	97Y	BSW	9.0-10.5	50 1,609	25.2	11.1	10.0	826	24.5	560/AA/A		
	1028534	265/40ZR18	XL	101Y	BSW	9.0-10.5	50 1,819	26.1	11.0	10.0	794	26.4	560/AA/A		
19	1028535	225/40ZR19	XL	93Y	BSW	7.5-9.0	50 1,433	25.9	9.4	10.0	801	21.8	560/AA/A		
	1028536	225/45ZR19	XL	96Y	BSW	7.0-8.5	50 1,565	26.8	9.2	10.0	776	23.1	560/AA/A		
	1028872	235/35ZR19	XL	91Y	BSW	8.0-9.5	50 1,356	25.4	9.9	10.0	819	23.2	560/AA/A		
	1028537	235/40ZR19	XL	96W	BSW	8.0-9.5	50 1,565	26.3	9.8	10.0	791	23.0	560/AA/A		
	1028538	235/50ZR19	XL	103W	BSW	6.5-8.5	50 1,929	28.1	10.1	10.0	740	28.1	560/AA/A		
	1028539	235/55ZR19	XL	105W	BSW	6.5-8.5	50 2,039	28.9	9.9	10.0	718	28.9	560/AA/A		

Technical data subject to change without prior notice.

Overall Diameter, Section Width, Tread Depth in inches. Weight in lbs.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

Mileage, Road Hazard, and 30 Day Free Trial warranties apply only to replacement tires. Original Equipment tires are excluded.

Tech : Hankook Innovative Technology HRS : Hankook HRS System SOA : Sound Absorber SEG : Sealguard EV : Electric Vehicle

Inch S-Code	Size	LI/SS	Sidewall	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Depth	Revs/Mile	Weight	UTQG	Tech	Original Equipment
					psi	lbs								
19	1028540 245/35ZR19	XL	93Y	BSW	8.0-9.5	50	1,433	25.6	10.1	10.0	810	23.6	560/AA/A	
	1028541 245/40ZR19	XL	98Y	BSW	8.0-9.5	50	1,653	26.6	10.1	10.0	782	24.4	560/AA/A	
	1028542 245/45ZR19	XL	102Y	BSW	7.5-9.0	50	1,874	27.5	9.9	10.0	756	26.8	560/AA/A	
	1028543 245/50ZR19	XL	105W	BSW	7.0-8.5	50	2,039	28.5	10.5	10.0	730	29.3	560/AA/A	
	1028544 255/35ZR19	XL	96Y	BSW	8.5-10.0	50	1,565	25.9	10.6	10.0	803	24.7	560/AA/A	
	1028571 255/40ZR19	XL	100Y	BSW	8.5-10.0	50	1,764	26.9	10.6	10.0	774	25.9	560/AA/A	
	1028545 255/45ZR19	XL	104W	BSW	8.0-9.5	50	1,984	27.9	10.4	10.0	745	28.1	560/AA/A	
	1028546 265/35ZR19	XL	98Y	BSW	9.0-10.5	50	1,653	26.2	11.1	10.0	793	25.6	560/AA/A	
	1028547 265/50ZR19	XL	110W	BSW	7.5-9.5	50	2,337	29.3	11.4	10.0	710	32.3	560/AA/A	
	1028548 275/30ZR19	XL	96Y	BSW	9.0-10.0	50	1,565	25.4	11.5	10.0	817	27.1	560/AA/A	
	1028873 275/35ZR19	XL	100Y	BSW	9.0-11.0	50	1,764	26.4	11.4	10.0	786	26.7	560/AA/A	
	1028549 275/40ZR19	XL	105Y	BSW	9.0-11.0	50	2,039	27.5	11.3	10.0	756	30.0	560/AA/A	
	1028550 275/45ZR19	XL	108W	BSW	8.5-10.5	50	2,205	28.5	11.1	10.0	728	31.7	560/AA/A	
	1028551 285/30ZR19	XL	98Y	BSW	9.5-10.5	50	1,653	25.7	12.0	10.0	810	27.9	560/AA/A	
	1028874 285/35ZR19	XL	103Y	BSW	9.5-11.0	50	1,929	26.7	11.8	10.0	778	29.6	560/AA/A	
	1028552 285/40ZR19	SL	103Y	BSW	9.5-11.0	51	1,929	27.8	11.8	10.0	747	31.0	560/AA/A	
20	1028877 235/35ZR20	XL	92Y	BSW	8.0-9.5	50	1,389	26.5	9.5	10.0	785	23.4	560/AA/A	BMW 5-Series ('23-'25)
	1028553 245/35ZR20	XL	95Y	BSW	8.0-9.5	50	1,521	26.6	10.1	10.0	780	24.2	560/AA/A	
	1027399 245/40R20	XL	99H	BSW	8.0-9.5	50	1,709	27.4	10.2	9.5	757	26.6	620/A/A	
	1028554 245/40ZR20	XL	99Y	BSW	8.0-9.5	50	1,709	27.6	10.1	10.0	754	25.5	560/AA/A	
	1028555 245/45ZR20	XL	103Y	BSW	7.5-9.0	50	1,929	28.5	9.9	10.0	730	28.4	560/AA/A	
	1028556 255/35ZR20	XL	97Y	BSW	8.5-10.0	50	1,565	26.9	10.6	10.0	774	25.9	560/AA/A	
	1028567 255/40ZR20	XL	101Y	BSW	8.5-10.0	50	1,819	27.8	10.6	10.0	746	27.2	560/AA/A	
	1028557 255/45ZR20	XL	105W	BSW	8.0-9.5	50	2,039	28.9	10.4	10.0	720	30.0	560/AA/A	
	1028558 265/35ZR20	XL	99Y	BSW	9.0-10.5	50	1,709	27.2	11.1	10.0	765	26.8	560/AA/A	
	1028563 265/45ZR20	XL	108Y	BSW	8.5-10.0	50	2,205	29.1	10.8	10.0	713	31.5	560/AA/A	
	1028875 275/30ZR20	XL	97Y	BSW	9.0-10.0	50	1,609	26.4	11.5	10.0	787	28.5	560/AA/A	BMW 5-Series ('23-'25)
	1027400 275/35R20	XL	102H	BSW	9.0-11.0	50	1,874	27.4	11.5	10.0	759	29.6	620/A/A	
	1028876 275/35ZR20	XL	102Y	BSW	9.0-11.0	50	1,874	27.4	11.3	10.0	758	28.5	560/AA/A	
	1028559 275/40ZR20	XL	106Y	BSW	9.0-11.0	50	2,094	28.5	11.3	10.0	730	31.0	560/AA/A	
	1028564 275/45ZR20	XL	110Y	BSW	8.5-10.5	50	2,337	29.5	11.1	10.0	703	33.4	560/AA/A	
	1028560 285/30ZR20	XL	99Y	BSW	9.5-10.5	50	1,709	26.6	12.0	10.0	780	29.0	560/AA/A	
	1028561 285/35ZR20	SL	100Y	BSW	9.5-11.0	51	1,764	27.7	11.8	10.0	750	28.9	560/AA/A	
	1032976 305/35ZR20	XL	107Y	BSW	10.0-12.0	50	2,149	28.3	12.2	10.0	734	32.3	560/AA/A	
	1028562 315/35ZR20	XL	110Y	BSW	10.5-12.5	50	2,337	28.5	12.9	10.0	730	35.2	560/AA/A	
21	1028878 245/35ZR21	XL	96Y	BSW	8.0-9.5	50	1,565	27.6	10.1	10.0	753	25.3	560/AA/A	
	1028568 255/35ZR21	XL	98Y	BSW	8.5-10.0	50	1,653	27.8	10.6	10.0	746	27.0	560/AA/A	
	1028879 265/35ZR21	XL	101Y	BSW	9.0-10.5	50	1,819	28.2	11.1	10.0	738	28.5	560/AA/A	
	1028569 275/35ZR21	XL	103Y	BSW	9.0-11.0	50	1,929	28.4	11.4	10.0	732	30.3	560/AA/A	
22	1028565 265/35ZR22	XL	102Y	BSW	9.0-10.5	50	1,874	29.2	11.1	10.0	712	30.4	560/AA/A	
	1028566 285/35ZR22	XL	106Y	BSW	9.5-11.0	50	2,094	29.7	11.8	10.0	700	33.5	560/AA/A	

Technical data subject to change without prior notice.

Overall Diameter, Section Width, Tread Depth in inches. Weight in lbs.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

Mileage, Road Hazard, and 30 Day Free Trial warranties apply only to replacement tires. Original Equipment tires are excluded.

Tech : Hankook Innovative Technology HRS : Hankook HRS System SOA : Sound Absorber SEG : Sealguard EV : Electric Vehicle

Available Sizes

Ventus V2 concept² | H457

High Performance All-Season

Inch	S-Code	Size	LI/SS	Sidewall	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Depth	Revs/ Mile	Weight	UTQG	
						psi	lbs							
15	1014361	195/50R15	SL	82H	BSW	5.5-7.0	51	1,047	22.6	8.5	9.5	920	15.9	500/AA/A
	1014359	195/55R15	SL	85V	BSW	5.5-7.0	51	1,135	23.3	8.4	9.5	892	16.6	500/AA/A
	1014376	205/50R15	SL	86H	BSW	5.5-7.5	51	1,168	22.9	8.9	9.5	905	18.7	500/AA/A
16	1014375	185/55R16	SL	83H	BSW	5.0-6.5	51	1,074	23.9	7.8	9.5	870	16.6	500/AA/A
	1014367	205/45R16	SL	83V	BSW	6.5-7.5	51	1,074	23.2	8.4	9.5	897	17.9	500/AA/A
	1014360	205/50R16	SL	87V	BSW	5.5-7.5	51	1,201	23.9	8.9	9.5	867	19.5	500/AA/A
	1014358	205/55R16	XL	94V	BSW	5.5-7.5	50	1,477	24.7	8.7	9.5	840	20.5	500/AA/A
	1014373	215/55R16	XL	97V	BSW	6.0-7.5	50	1,609	25.1	9.1	9.5	827	22.3	500/AA/A
	1014369	225/50R16	SL	92V	BSW	6.0-8.0	51	1,389	24.8	9.7	9.5	837	21.8	500/AA/A
	1014368	225/55R16	XL	99V	BSW	6.0-8.0	50	1,709	25.6	9.6	9.5	811	23.6	500/AA/A
	1014372	245/50R16	SL	97H	BSW	7.0-8.5	51	1,609	25.6	10.4	9.5	811	23.9	500/AA/A
17	1014378	205/40R17	XL	84V	BSW	7.0-8.0	50	1,102	23.3	8.7	9.5	891	18.0	500/AA/A
	1014371	205/45R17	XL	88V	BSW	6.5-7.5	50	1,235	24.1	8.4	9.5	862	18.6	500/AA/A
	1014370	205/50R17	XL	93V	BSW	5.5-7.5	50	1,433	25.0	8.8	9.5	832	19.4	500/AA/A
	1014363	215/45R17	XL	91V	BSW	7.0-8.0	50	1,356	24.5	8.7	9.5	848	20.2	500/AA/A
	1014362	215/50R17	SL	91V	BSW	6.0-7.5	51	1,356	25.4	9.4	9.5	819	22.0	500/AA/A
	1027427	215/55R17	SL	94W	BSW	6.0-7.5	51	1,477	26.1	9.1	9.5	772	21.4	500/AA/A
	1014365	225/45R17	XL	94V	BSW	7.0-8.5	50	1,477	24.8	9.2	9.5	837	21.2	500/AA/A
	1014364	225/50R17	XL	98V	BSW	6.0-8.0	50	1,653	25.8	9.7	9.5	806	23.5	500/AA/A
	1027428	225/55R17	XL	101W	BSW	6.0-8.0	50	1,819	26.6	9.3	9.5	757	25.0	500/AA/A
	1014366	235/45R17	XL	97V	BSW	7.5-9.0	50	1,609	25.2	9.6	9.5	824	22.8	500/AA/A
	1027429	235/50R17	SL	96W	BSW	6.5-8.5	51	1,565	26.1	10.1	9.5	772	23.9	500/AA/A
	1027430	245/40R17	XL	95W	BSW	8.0-9.5	50	1,521	24.6	10.1	9.5	822	22.2	500/AA/A
	1014379	245/45R17	SL	95V	BSW	7.5-9.0	51	1,521	25.5	9.9	9.5	814	24.2	500/AA/A
18	1014377	215/45R18	XL	93V	BSW	7.0-8.0	50	1,433	25.5	8.7	9.5	815	19.8	500/AA/A
	1015032	225/40R18	XL	92W	BSW	7.5-9.0	50	1,389	24.9	9.4	9.5	833	21.1	500/AA/A
	1027431	225/45R18	XL	95W	BSW	7.0-8.5	50	1,521	25.8	9.2	9.5	783	22.4	500/AA/A
	1027432	225/50R18	SL	95W	BSW	6.0-8.0	51	1,521	26.7	9.6	9.5	755	23.9	500/AA/A
	1027433	235/40R18	XL	95W	BSW	8.0-9.5	50	1,521	25.2	9.8	9.5	800	21.7	500/AA/A
	1027434	235/45R18	XL	98W	BSW	7.5-9.0	50	1,653	26.2	9.6	9.5	770	24.1	500/AA/A
	1027435	235/50R18	XL	101W	BSW	6.5-8.5	50	1,819	27.2	10.1	9.5	743	25.7	500/AA/A
	1027436	245/40R18	XL	97W	BSW	8.0-9.5	50	1,609	25.5	10.1	9.5	790	23.1	500/AA/A
	1027437	245/45R18	XL	100W	BSW	7.5-9.0	50	1,764	26.5	9.9	9.5	761	25.3	500/AA/A
	1027438	245/55R18	SL	103W	BSW	7.0-8.5	51	1,929	28.5	10.2	9.5	708	27.9	500/AA/A
	1027439	255/35R18	XL	94W	BSW	8.5-10.0	50	1,477	24.8	10.6	9.5	813	21.1	500/AA/A
	1027440	255/40R18	XL	99W	BSW	8.5-10.0	50	1,709	25.9	10.6	9.5	779	24.7	500/AA/A
	19	1027441	225/45R19	XL	96W	BSW	7.0-8.5	50	1,565	26.8	9.2	9.5	753	23.4
1027442		245/40R19	XL	98W	BSW	8.0-9.5	50	1,653	26.6	10.1	9.5	759	24.9	500/AA/A
1027443		245/45R19	XL	102W	BSW	7.5-9.0	50	1,874	27.5	9.9	9.5	733	26.6	500/AA/A
1027444		255/35R19	XL	96W	BSW	8.5-10.0	50	1,565	25.9	10.6	9.5	780	23.4	500/AA/A
1027445		255/40R19	XL	100W	BSW	8.5-10.0	50	1,764	26.9	10.6	9.5	750	26.1	500/AA/A
20	1027446	245/40R20	XL	99W	BSW	8.0-9.5	50	1,709	27.6	10.1	9.5	731	26.3	500/AA/A
	1027447	245/45R20	XL	103W	BSW	7.5-9.0	50	1,929	28.5	9.9	9.5	707	27.7	500/AA/A
	1027448	255/45R20	XL	105W	BSW	8.0-9.5	50	2,039	28.9	10.4	10.0	698	28.7	500/AA/A
	1027449	275/40R20	XL	106W	BSW	9.0-11.0	50	2,094	28.5	11.3	9.5	707	30.9	500/AA/A

Technical data subject to change without prior notice.

Overall Diameter, Section Width, Tread Depth in inches. Weight in lbs.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

Ventus ST | RH06

Performance All-season

Inch	S-Code	Size	LI/SS	Sidewall	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Depth	Revs/ Mile	Weight	UTQG	
						psi	lbs							
17	1004322	255/50R17	SL	101W	BSW	7.0-9.0	51	1,819	27.0	10.6	10.5	770	30.3	420/A/A
	1003968	275/60R17	SL	110V	BSW	7.5-9.5	44	2,337	30.0	11.4	10.0	693	36.7	420/A/A
18	1004324	295/45R18	SL	108V	BSW	9.5-11.0	51	2,205	28.4	11.9	10.5	732	34.3	420/A/A
20	1004328	275/40R20	XL	106W	BSW	9.0-11.0	50	2,094	28.6	11.1	10.0	727	33.1	420/A/A
	1004296	275/45R20	XL	109V	BSW	8.5-10.5	50	2,271	29.7	10.9	10.0	700	34.7	420/A/A
	1004295	275/55R20	XL	117V	BSW	7.5-9.5	50	2,833	31.8	11.4	10.0	653	39.9	420/A/A
	1004231	295/45R20	XL	114V	BSW	9.5-11.0	50	2,601	30.3	12.0	10.0	685	38.0	420/A/A
22	1004914	265/35R22	XL	102W	BSW	9.0-10.5	50	1,874	29.2	10.9	10.5	711	32.0	420/A/A
	1007457	265/40R22	XL	106V	BSW	9.0-10.5	50	2,094	30.2	10.9	10.5	687	34.1	420/A/A
	1008409	275/45R22	XL	112V	BSW	8.5-10.5	50	2,469	31.7	10.9	10.0	656	37.4	420/A/A
	1007301	285/45R22	XL	114V	BSW	9.0-10.5	50	2,601	32.0	11.4	10.5	650	40.7	420/A/A
	1005412	305/40R22	XL	114V	BSW	10.0-12.0	50	2,601	31.5	12.5	10.0	659	39.7	420/A/A
	1004712	305/45R22	XL	118V	BSW	9.5-11.5	50	2,910	32.7	12.1	10.0	635	42.5	420/A/A

Technical data subject to change without prior notice.

Overall Diameter, Section Width, Tread Depth in inches. Weight in lbs.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

About Hankook

Dynapro

iON

Ventus

Kinergy

WeatherFlex

Winter

Vantra





KINERGY

CAR / SUV

Kinergy XP (H446)

Kinergy GT (H436 & H436B)

Kinergy PT (H737)

Kinergy ST (H735)

About Hankook

Dynapro

ION

Ventus

Kinergy

WeatherFlex

Winter

Vantra

The Kinergy Family

← All-Season →

KINERGY^{XP}

KINERGY^{GT}



← Grand Touring →

KINERGY^{PT}

KINERGYST



← Touring →

Kinergy Family

		 Compact Car	 Compact & Medium SUV
All-Season  + 	Grand Touring +		
	Grand Touring		
	Touring		 



Sedan



Sport Sedan



Large & High SUV

KINERGY^{XP}



KINERGY^{XP}



The Standard lineup comes fully stocked in compact sizes.

Kinergy Family

Comfort & durability? XP or GT.

KINERGYXP

“Delivers a smooth, comfortable ride that families and SUV drivers love – with confident performance on both wet and snowy roads.”



KINERGYGT

“Offers lasting comfort and reduced road noise – for a smoother, more relaxing drive even on long trips.”



Frequent long drives?
PT is built for mileage.

KINERGY^{PT}

“ Built for long mileage – ideal for commuters and drivers planning to keep their car for the long haul. ”



All-season use.
Balanced for every drive.

KINERGYST

“ Offers solid all-season performance and balance—an ideal pick for practical, value-conscious drivers. ”



KINERGY^{XP} (H446)

Premium All-Season Control and Comfort



Warranty






Outstanding All-Season Control

A Beveled Edges on Shoulder Grooves

The beveled edges generate grip with improved traction on snowy roads.



Wet Handling improved by 6%
compared to its predecessor



→ **KINERGY XP** → Conventional

Wet Braking improved by 2%
compared to its predecessor



→ **KINERGY XP** → Conventional

Snow Accelerating improved by 15%
compared to its predecessor



→ **KINERGY XP** → Conventional

Snow Braking improved by 14%
compared to its predecessor



→ **KINERGY XP** → Conventional

Reliable Longevity

Treadlife




* Based on internal mileage test

Enhanced Quietness

B Optimized Multi-Pitch Sequencing

Tire noise can be drastically reduced by optimizing the pitch sequence. Kinergy XP has optimized the number and size of pitches to listen more to what matters.

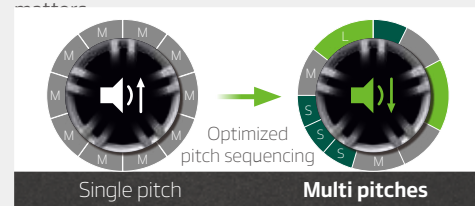

KINERGY^{GT} (H436)

Grand touring all-season tire for all roads



Warranty



Wide circumferential 4 channel grooves

Wider grooves provide maximum water evacuation which promotes wet traction.




Conventional

KINERGY GT

Optimal profile design

A wide tread profile provides stability and uniformity which reduces distortion, delivering outstanding handling performance and improved tread life.

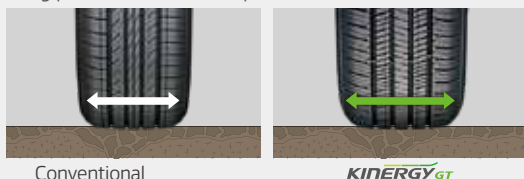

Conventional

KINERGY GT

Optimized block stiffness



Optimized tread block stiffness ensures enhanced durability and tread uniformity for improved handling performance and mileage.

Center rib



A rigid center rib provides excellent grip for outstanding handling and braking performance.

Equalised chamfer sipe

Chamfer sipes maximize snow performance providing consistent grip in snowy conditions.




Conventional

KINERGY GT

Optimized lateral groove design

Wide lateral grooves provide excellent snow grip and enhance snow traction.

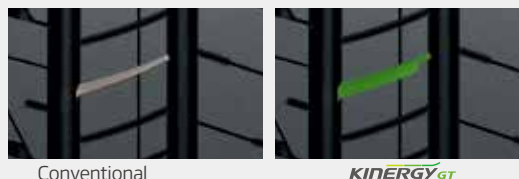

Conventional

KINERGY GT

Step-wing shoulder



Step-wing shoulder design maximizes water expulsion for outstanding safety.

Wide lateral groove



Wide lateral grooves incorporated into the tire's tread ensure hydroplaning resistance for excellent wet handling and braking.

KINERGY^{PT} (H737)

Premium touring all-season




Optimized block stiffness



Optimized tread block stiffness ensures enhanced durability and tread uniformity for improved handling performance and mileage.

High stiffness center rib




A rigid center rib provides excellent grip for outstanding dry handling and braking performance.

Wide lateral groove



Wide lateral grooves incorporated into the tire's tread ensure hydroplaning resistance for excellent wet handling and braking.


Belt edge tape folding



A rubber sheet, incorporated between 1st and 2nd belts help to prevent separation in the tire's belt edge and increase durability.



Conventional



KINERGY^{PT}

Warranty




Wide circumferential out grooves

Wide out grooves provide maximum water evacuation which promotes wet traction.



Conventional



KINERGY^{PT}

KINERGYST (H735)

Standard touring all-season



Optimized block stiffness




Optimized tread block stiffness ensures enhanced durability and tread uniformity for improved handling performance and mileage.

Optimized sipe design



Multiple sipe improves riding comfort and reduces pass by noise.

Solid center rib



A rigid center rib provides excellent grip for outstanding dry handling and braking performance.

Notch sipes




Create biting edges offer great all-season traction in wet, dry and snowy conditions.

Tie-bar

A block applied to the tie-bar of out lateral groove provides excellent handling and braking.



Conventional



KINERGYST

Warranty



Available Sizes

Kinergy XP | H446

Grand Touring All-Season

Inch	S-Code	Size	LI/SS	Sidewall	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Depth	Revs/ Mile	Weight	UTQG	Original Equipment
						psi	lbs							
16	1032024	205/55R16	SL	91V	BSW	5.5-7.5	51	1,356	24.7	8.7	10.0	842	18.4	720/A/A
	1032025	205/60R16	SL	92V	BSW	5.5-7.5	51	1,389	25.5	8.7	10.0	816	20.0	720/A/A
	1032026	215/55R16	XL	97H	BSW	6.0-7.5	50	1,609	25.1	9.1	10.0	829	21.2	720/A/A
	1032027	215/60R16	SL	95V	BSW	6.0-7.5	51	1,521	25.9	9.0	10.0	801	20.1	720/A/A
17	1035765	195/60R17	SL	90V	BSW	5.5-7.0	51	1,323	26.0	8.3	10.0	799	20.5	720/A/A
	1032028	205/50R17	XL	93V	BSW	5.5-7.5	50	1,433	24.9	8.9	10.0	833	20.0	720/A/A
	1032029	205/55R17	SL	91H	BSW	5.5-7.5	51	1,356	25.7	8.7	10.0	808	20.0	720/A/A
	1032030	215/45R17	XL	91V	BSW	7.0-8.0	50	1,356	24.5	8.4	10.0	847	19.9	720/A/A
	1030844	215/45R17	XL	91H	BSW	7.0-8.0	50	1,356	24.4	8.9	9.5	850	19.3	620/A/A
	1032377	215/50R17	SL	91V	BSW	6.0-7.5	51	1,356	25.4	9.5	9.5	817	21.8	500/A/A
	1032031	215/50R17	XL	95V	BSW	6.0-7.5	50	1,521	25.3	9.4	10.0	820	21.4	720/A/A
	1032032	215/55R17	SL	94V	BSW	6.0-7.5	51	1,477	26.2	9.1	10.0	794	21.7	720/A/A
	1032033	225/45R17	XL	94V	BSW	7.0-8.5	50	1,477	24.8	8.9	10.0	838	19.9	720/A/A
	1032034	225/50R17	SL	94V	BSW	6.0-8.0	51	1,477	25.7	9.7	10.0	808	21.0	720/A/A
	1032035	225/55R17	SL	97V	BSW	6.0-8.0	51	1,609	26.5	9.4	10.0	783	23.8	720/A/A
	1032036	225/60R17	SL	99H	BSW	6.0-8.0	51	1,709	27.4	9.3	10.0	757	25.3	720/A/A
	1032037	235/45R17	XL	97V	BSW	7.5-9.0	50	1,609	25.2	9.3	10.0	825	22.7	720/A/A
	1032038	235/50R17	SL	96V	BSW	6.5-8.5	51	1,565	26.1	10.1	10.0	797	23.4	720/A/A
	1032039	235/55R17	SL	99H	BSW	6.5-8.5	51	1,709	26.9	9.8	10.0	771	24.6	720/A/A
18	1032040	215/45R18	SL	89V	BSW	7.0-8.0	51	1,279	25.5	8.4	10.0	816	20.0	720/A/A
	1032041	215/55R18	SL	95H	BSW	6.0-7.5	51	1,521	27.0	9.1	10.0	768	22.5	720/A/A
	1032042	225/40R18	XL	92V	BSW	7.5-9.0	50	1,389	24.9	9.1	10.0	833	20.3	720/A/A
	1032043	225/45R18	XL	95V	BSW	7.0-8.5	50	1,521	25.8	8.9	10.0	806	21.9	720/A/A
	1032044	225/50R18	XL	99V	BSW	6.0-8.0	50	1,709	26.7	9.7	10.0	778	24.3	720/A/A
	1032045	225/55R18	SL	98V	BSW	6.0-8.0	51	1,653	27.5	9.4	10.0	755	25.0	720/A/A
	1032046	225/60R18	SL	100V	BSW	6.0-8.0	51	1,764	28.4	9.3	10.0	732	26.1	720/A/A

Technical data subject to change without prior notice.

Overall Diameter, Section Width, Tread Depth in inches. Weight in lbs.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

Mileage, Road Hazard, and 30 Day Free Trial warranties apply only to replacement tires. Original Equipment tires are excluded.

Tech : Hankook Innovative Technology HRS : Hankook HRS System SOA : Sound Absorber SEG : Sealguard EV : Electric Vehicle

Kinergy XP | H446

Grand Touring All-Season

Inch	S-Code	Size	LI/SS	Sidewall	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Depth	Revs/ Mile	Weight	UTQG	Original Equipment
						psi	lbs							
18	1032047	235/40R18	XL	95V	BSW	8.0-9.5	50	1,521	25.3	9.5	10.0	822	21.8	720/A/A
	1032048	235/45R18	SL	94V	BSW	7.5-9.0	51	1,477	26.1	9.3	10.0	795	22.0	720/A/A
	1032049	235/60R18	XL	107V	BSW	6.5-8.5	50	2,149	29.0	9.6	10.0	717	28.3	720/A/A
	1032050	245/40R18	XL	97V	BSW	8.0-9.5	50	1,609	25.6	9.8	10.0	812	23.8	720/A/A
	1032051	245/45R18	XL	100V	BSW	7.5-9.0	50	1,764	26.5	9.6	10.0	784	25.1	720/A/A
	1032052	245/50R18	SL	100V	BSW	7.0-8.5	51	1,764	27.4	10.6	10.0	757	25.4	720/A/A
19	1035766	195/50R19	SL	88V	BSW	5.5-7.0	51	1,235	26.5	8.4	10.0	785	20.2	720/A/A
	1032053	225/40R19	XL	93V	BSW	7.5-9.0	50	1,433	26.0	9.1	10.0	800	21.4	720/A/A
	1032017	225/55R19	SL	99V	BSW	6.0-8.0	51	1,709	28.5	9.4	10.0	728	26.1	720/A/A
	1032018	235/40R19	XL	96V	BSW	8.0-9.5	50	1,565	26.3	9.5	10.0	790	23.1	720/A/A
	1034713	235/45R19	XL	99H	BSW	7.5-9.0	51	1,521	27.2	9.3	10.0	765	23.5	720/A/A
	1032020	245/40R19	XL	98V	BSW	8.0-9.5	50	1,656	26.6	9.8	10.0	781	24.9	720/A/A
	1032021	245/45R19	XL	102V	BSW	7.5-9.0	50	1,874	27.4	9.6	10.0	757	26.1	720/A/A
	1032022	255/40R19	XL	100V	BSW	8.5-10.0	50	1,764	26.9	10.2	10.0	773	25.3	720/A/A
	1032023	255/45R19	XL	104V	BSW	8.0-9.5	50	1,984	27.9	10.1	10.0	744	28.5	720/A/A
20	1032013	245/40R20	XL	99V	BSW	8.0-9.5	50	1,709	27.6	9.8	10.0	753	25.2	720/A/A
	1032014	245/45R20	SL	99V	BSW	7.5-9.0	51	1,709	28.5	9.6	10.0	730	27.0	720/A/A
	1032015	245/50R20	SL	102V	BSW	7.0-8.5	51	1,874	29.6	10.5	10.0	703	29.8	720/A/A
	1032016	255/45R20	XL	105V	BSW	8.0-9.5	50	2,039	28.9	10.1	10.0	720	29.8	720/A/A

Technical data subject to change without prior notice.

Overall Diameter, Section Width, Tread Depth in inches. Weight in lbs.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

Mileage, Road Hazard, and 30 Day Free Trial warranties apply only to replacement tires. Original Equipment tires are excluded.

Tech : Hankook Innovative Technology HRS : Hankook HRS System SOA : Sound Absorber SEG : Sealguard EV : Electric Vehicle

About Hankook

Dynapro

iON

Ventus

Kinergy

WeatherFlex

Winter

Vantra

Available Sizes

Kinergy GT | H436

Grand Touring All-Season

Inch	S-Code	Size	LI/SS	Sidewall	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Depth	Revs/ Mile	Weight	UTQG	Tech	Original Equipment
						psi	lbs								
15	1022094	185/65R15	SL	88H	BSW	5.0-6.5	51 1,235	24.4	7.8	9.0	850	16.7	500/A/A		Hyundai Venue ('19-'24)
	1015532	195/65R15	SL	91T	BSW	5.5-7.0	51 1,356	24.7	8.4	9.5	840	16.9	540/A/A		Hyundai Elantra ('15-'18)
	1024032	195/65R15	SL	91H	BSW	5.5-7.0	51 1,356	24.8	8.3	8.5	838	16.9	540/A/A		Hyundai Elantra ('20-'26)
16	1021366	195/60R16	SL	89H	BSW	5.5-7.0	51 1,279	25.1	8.6	10.0	827	19.9	540/A/A		
	1014871	205/55R16	SL	91H	BSW	5.5-7.5	51 1,356	24.8	6.4	10.0	837	20.4	540/A/A		Volkswagen Golf / Jetta ('15-'19)
	1016295	205/55R16	SL	91H	BSW	5.5-7.5	51 1,356	24.8	9.1	8.5	839	18.4	520/B/A		Chevrolet Cruz ('16-'19)
	1015534	205/55R16	SL	91H	BSW	5.5-7.5	51 1,356	24.8	8.9	9.5	837	18.5	540/A/A		Hyundai Elantra ('15-'18)
	1022888	205/55R16	SL	91H	BSW	5.5-7.5	51 1,356	24.9	8.9	9.5	834	18.5	500/A/A		Toyota Corolla ('19-'25)
	1019647	205/60R16	SL	92H	BSW	5.5-7.5	51 1,389	25.8	8.6	9.5	806	19.6	500/A/A		Hyundai Kona ('17-'24), Kia Soul ('18-'25)
	1020211	205/60R16	SL	92H	BSW	5.5-7.5	51 1,389	25.7	8.8	10.0	807	20.8	500/B/A		Volkswagen Jetta ('17-'20)
	1022795	205/60R16	SL	92H	BSW	5.5-7.5	51 1,389	25.8	8.7	9.5	804	20.3	500/A/A		Nissan Sentra ('19-'23)
	1015397	205/65R16	SL	95H	BSW	5.5-7.5	51 1,521	26.2	8.5	10.0	793	21.9	500/A/A		Hyundai Sonata ('14-'18), Kia Optima ('15-'19)
	1015886	215/55R16	SL	93H	BSW	6.0-7.5	51 1,433	25.1	9.1	9.5	827	20.4	500/A/A		Honda Civic_4DR ('15-'24)
	1014971	215/60R16	SL	95T	BSW	6.0-7.5	51 1,521	26.2	8.9	10.0	793	23.4	540/A/A		Volkswagen Passat / Beetle ('14-'19)
	1020898	215/60R16	SL	95H	BSW	6.0-7.5	51 1,521	26.2	8.9	10.0	793	21.5	500/A/A		Nissan Altima ('18-'25)
	1021931	215/65R16	SL	98H	BSW	6.0-7.5	51 1,653	27.0	9.0	10.0	769	23.9	460/B/A		Chevrolet Trailblazer ('20-'21)
17	1020212	205/55R17	SL	91H	BSW	5.5-7.5	51 1,356	25.9	9.2	10.0	803	20.9	500/B/A		Volkswagen Jetta ('17-'20)
	1016785	215/55R17	SL	94V	BSW	6.0-7.5	51 1,477	26.1	9.3	10.0	795	22.5	500/A/A		Hyundai Sonata ('14-'19)
	1020513	215/55R17	SL	94V	BSW	6.0-7.5	51 1,477	26.2	9.3	10.0	793	23.0	500/A/A		Hyundai Kona ('17-'20), Kia Soul ('18-'25)
	1014972	215/55R17	SL	94H	BSW	6.0-7.5	51 1,477	26.3	9.4	10.0	789	22.5	540/A/A		Volkswagen Passat / Beetle ('14-'19)
	1025644	215/55R17	SL	94V	BSW	6.0-7.5	51 1,477	26.2	9.3	9.5	793	22.9	500/A/A		Hyundai Kona ('20-'23)
	1025718	215/60R17	SL	96H	BSW	6.0-7.5	51 1,565	27.1	9.1	8.5	766	23.2	480/A/A		Honda HR-V ('22-'27)
	1014872	225/45R17	SL	91H	BSW	7.0-8.5	51 1,356	24.9	9.3	10.0	835	21.8	540/A/A		Volkswagen Golf ('14-'18)
	1024034	225/45R17	SL	91W	BSW	7.0-8.5	51 1,356	24.8	9.2	8.5	839	20.5	540/A/A		Hyundai Elantra ('20-'26)
	1028628	225/45R17	SL	91W	BSW	7.0-8.5	51 1,356	24.8	9.2	8.5	839	20.2	540/A/A		Hyundai Elantra HEV ('20-'26)
	1017808	225/50R17	SL	94V	BSW	6.0-8.0	51 1,477	25.9	9.4	9.0	801	22.8	500/A/A		
	1030191	225/50R17	SL	94V	BSW	6.0-8.0	51 1,477	25.8	9.8	10.5	805	21.8	500/A/A		Honda Accord ('17-'27)
	1024767	225/55R17	SL	97H	BSW	6.0-8.0	51 1,609	26.7	9.7	8.5	779	24.3	540/A/A		
	1015527	225/60R17	SL	99H	BSW	6.0-8.0	51 1,709	27.6	9.6	10.0	751	26.0	540/A/A		Volkswagen Taos ('21-'22) Hyundai Tucson ('15-'21), Kia Sportage ('15-'21)
	1019226	235/65R17	SL	104H	BSW	6.5-8.5	51 1,984	29.3	9.1	10.0	709	28.7	540/A/A		Honda CR-V ('16-'27)

Kinergy GT | H436

Grand Touring All-Season

Inch S-Code	Size	LI/SS	Sidewall	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Depth	Revs/ Mile	Weight	UTQG	Tech	Original Equipment
					psi	lbs								
17	1021367 245/50R17 SL	99V	BSW	7.0-8.5	51	1,709	26.6	10.7	10.0	781	26.8	540/A/A		
	1015891 P225/55R17 SL	95H	BSW	6.0-8.0	51	1,521	26.7	9.4	9.0	779	23.3	540/B/A		Chevrolet Malibu ('16-'24)
18	1022797 215/45R18 SL	89V	BSW	7.0-8.0	51	1,279	25.6	9.1	9.0	812	21.5	500/A/A		Nissan Sentra ('19-'25)
	1020213 225/45R18 SL	91H	BSW	7.0-8.5	51	1,356	25.9	9.4	10.0	802	21.1	540/B/A		Volkswagen Jetta ('17-'23)
	1028351 225/45R18 SL	91H	BSW	7.0-8.5	51	1,356	25.9	9.4	9.0	801	20.9	620/B/A		Volkswagen Jetta GLI ('23-'29)
	1021933 225/55R18 SL	98H	BSW	6.0-8.0	51	1,653	27.6	9.6	10.0	751	26.7	700/B/A		Chevrolet Trailblazer ('20-'26)
	1025719 225/55R18 SL	98H	BSW	6.0-8.0	51	1,653	27.7	9.6	9.0	749	26.5	480/A/A		Honda HR-V ('22-'27)
	1020853 235/45R18 SL	94V	BSW	7.5-9.0	51	1,477	26.3	9.6	10.0	790	24.4	540/A/A		Toyota Camry ('17-'24)
	1014973 235/45R18 SL	94H	BSW	7.5-9.0	51	1,477	26.3	9.7	10.0	790	24.1	540/A/A		Volkswagen Passat / Beetle ('14-'19)
	1031294 235/45R18 SL	94V	BSW	7.5-9.0	51	1,477	26.3	9.6	9.5	790	25.0	540/A/A	EV	
	1031546 235/45R18 SL	94V	BSW	7.5-9.0	51	1,477	26.3	9.6	9.5	790	25.6	540/A/A	EV, SOA	
	1017534 235/60R18 SL	103H	BSW	6.5-8.5	51	1,929	29.3	9.8	10.0	709	30.1	540/A/A		Honda CR-V ('16-'27), Honda Clarity ('24-'29)
	1022016 255/65R18 SL	111H	BSW	7.0-9.0	51	2,403	30.8	10.4	10.5	675	35.2	500/A/A		Ford Explorer ('19-'26)
19	1018940 235/40R19 SL	92V	BSW	8.0-9.5	51	1,389	26.3	9.8	10.0	791	25.3	500/A/A		Nissan Altima ('18-'25)
	1024217 235/50R19 SL	99H	BSW	6.5-8.5	51	1,709	28.2	10.2	10.0	736	28.1	500/A/A		Chevrolet Equinox ('17-'24), GMC Terrain ('17-'24)
	1015528 245/45R19 SL	98H	BSW	7.5-9.0	51	1,653	27.4	10.0	10.0	759	27.7	540/A/A		Hyundai Tucson ('15-'21), Kia Sportage ('15-'21)

Kinergy GT HRS | H436B

Grand Touring All-Season/HRS

Inch S-Code	Size	LI/SS	Sidewall	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Depth	Revs/ Mile	Weight	UTQG	Tech	Original Equipment
					psi	lbs								
17	1020496 205/55R17 SL	91H	BSW	5.5-7.5	51	1,356	25.9	8.7	9.5	803	24.5	500/A/A	Runflat	Mercedes Benz A-Class / B-Class ('18-'25)
18	1019371 225/60R18 XL	104H	BSW	6.0-8.0	50	1,984	28.6	9.5	9.5	726	36.1	500/A/A	Runflat	BMW X3 / X4 ('17-'24)

Technical data subject to change without prior notice.

Overall Diameter, Section Width, Tread Depth in inches. Weight in lbs.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

Mileage, Road Hazard, and 30 Day Free Trial warranties apply only to replacement tires. Original Equipment tires are excluded.

HRS Tires can be driven on up to 50 miles on a deflating or deflated tire at a top speed of 50 mph (subject to application and operating conditions).

Mileage and Road Hazard warranties do not apply to HRS Tires.

Tech : Hankook Innovative Technology HRS : Hankook HRS System SOA : Sound Absorber SEG : Sealguard EV : Electric Vehicle

Available Sizes

Kinergy PT | H737

Premium Touring All-Season

Inch	S-Code	Size	LI/SS	Sidewall	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Depth	Revs/ Mile	Weight	UTQG	
						psi	lbs							
15	1025056	185/55R15	SL	82V	BSW	5.0-6.5	51	1,047	22.9	7.9	10.0	908	16.2	800/A/A
	1021404	185/60R15	SL	84T	BSW	5.0-6.5	51	1,102	23.6	8.0	11.0	880	17.0	860/A/A
	1025057	185/65R15	SL	88H	BSW	5.0-6.5	51	1,235	24.3	7.8	11.0	854	17.4	860/A/A
	1025058	195/55R15	SL	85V	BSW	5.5-7.0	51	1,135	23.3	8.2	10.0	893	17.2	800/A/A
	1021394	195/60R15	SL	88H	BSW	5.5-7.0	51	1,235	24.1	8.5	10.5	862	18.1	860/A/A
	1021389	195/65R15	SL	91H	BSW	5.5-7.0	51	1,356	24.9	8.4	11.0	835	19.0	860/A/A
	1021410	205/60R15	SL	91H	BSW	5.5-7.5	51	1,356	24.6	8.9	11.0	846	19.6	860/A/A
	1023464	205/65R15	SL	94H	BSW	5.5-7.5	51	1,477	25.3	8.7	11.0	819	20.8	860/A/A
	1021402	205/70R15	SL	96T	BSW	5.0-7.0	51	1,565	26.2	8.4	11.0	792	21.8	860/A/A
	1023465	215/60R15	SL	94H	BSW	6.0-7.5	51	1,477	25.0	9.3	11.0	830	21.6	860/A/A
	1021395	215/70R15	SL	98T	BSW	5.5-7.0	51	1,653	26.8	8.9	10.5	776	23.7	860/A/A
	1021411	225/70R15	SL	100T	BSW	6.0-7.5	51	1,764	27.3	9.1	11.0	760	25.0	860/A/A
	1021412	235/70R15	SL	103T	BSW	6.0-8.0	51	1,929	27.9	9.6	11.0	745	26.3	860/A/A
	1021359	235/75R15	XL	109T	BSW	6.0-8.0	50	2,271	28.7	9.3	10.5	723	28.7	860/A/A
16	1025059	185/55R16	SL	83H	BSW	5.0-6.5	51	1,074	23.9	7.9	11.0	870	17.6	860/A/A
	1025060	195/55R16	SL	87V	BSW	5.5-7.0	51	1,202	24.3	8.2	10.0	856	18.4	800/A/A
	1021390	205/55R16	SL	91H	BSW	5.5-7.5	51	1,356	24.8	8.9	11.0	838	20.1	860/A/A
	1021398	205/60R16	SL	92H	BSW	5.5-7.5	51	1,389	25.6	8.9	10.5	813	21.0	860/A/A
	1021391	205/65R16	SL	95H	BSW	5.5-7.5	51	1,521	26.3	8.7	11.0	788	22.2	860/A/A
	1027450	205/70R16	SL	97H	BSW	5.0-7.0	51	1,609	27.3	8.2	11.0	762	23.6	860/A/A
	1025061	215/55R16	SL	93H	BSW	6.0-7.5	51	1,433	25.1	9.2	11.0	827	21.1	860/A/A
	1023419	215/60R16	SL	95H	BSW	6.0-7.5	51	1,521	26.0	9.1	11.0	798	23.1	860/A/A
	1023466	215/65R16	SL	98H	BSW	6.0-7.5	51	1,653	26.9	9.0	11.0	772	24.8	860/A/A
	1021387	225/60R16	SL	98H	BSW	6.0-8.0	51	1,653	26.5	8.4	11.0	784	25.5	860/A/A
	1021386	225/65R16	SL	100T	BSW	6.0-8.0	51	1,764	27.4	9.3	11.0	759	25.2	860/A/A
	1021406	235/60R16	SL	100H	BSW	6.5-8.5	51	1,764	27.0	9.9	11.0	770	26.2	860/A/A
	1021392	235/65R16	SL	103T	BSW	6.5-8.5	51	1,929	27.9	9.7	11.0	744	26.9	860/A/A
	17	1025062	205/50R17	SL	93V	BSW	5.5-7.5	50	1,433	25.0	8.9	10.0	832	20.6
1025063		215/45R17	SL	87V	BSW	7.0-8.0	51	1,202	24.5	8.7	10.0	848	19.1	800/A/A
1025064		215/50R17	XL	95V	BSW	6.0-7.5	50	1,521	25.4	9.2	10.0	819	23.2	800/A/A
1025065		215/55R17	SL	94V	BSW	6.0-7.5	51	1,477	26.2	9.2	10.0	794	22.3	800/A/A
1021405		215/60R17	SL	96H	BSW	6.0-7.5	51	1,565	27.1	9.3	11.0	768	24.9	860/A/A
1021407		215/65R17	SL	99T	BSW	6.0-7.5	51	1,709	27.9	9.0	11.0	744	25.7	860/A/A

Inch	S-Code	Size		LI/SS	Sidewall	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Depth	Revs/ Mile	Weight	UTQG
							psi	lbs						
17	1025066	225/45R17	XL	94V	BSW	7.0-8.5	50	1,477	24.8	9.2	10.0	837	20.4	800/A/A
	1025067	225/50R17	SL	94V	BSW	6.0-8.0	51	1,477	25.8	9.6	10.0	806	22.3	800/A/A
	1021400	225/55R17	SL	97H	BSW	6.0-8.0	51	1,609	26.7	9.8	11.0	779	25.7	860/A/A
	1021393	225/60R17	SL	99H	BSW	6.0-8.0	51	1,709	27.5	9.6	10.5	754	26.5	860/A/A
	1021397	225/65R17	SL	102H	BSW	6.0-8.0	51	1,874	28.4	9.4	11.0	731	27.1	860/A/A
	1025068	235/45R17	XL	97V	BSW	7.5-9.0	50	1,609	25.2	9.6	10.0	824	23.0	800/A/A
	1025069	235/50R17	SL	96V	BSW	6.5-8.5	51	1,565	26.2	10.1	10.0	794	25.8	800/A/A
	1025070	235/55R17	SL	99H	BSW	6.5-8.5	51	1,709	27.0	9.8	11.0	769	26.8	860/A/A
	1021409	235/60R17	SL	102T	BSW	6.5-8.5	51	1,874	28.0	9.9	11.0	742	28.0	860/A/A
	1025071	235/65R17	SL	104H	BSW	6.5-8.5	51	1,984	28.9	9.8	11.0	718	28.4	860/A/A
	1025072	245/45R17	XL	99H	BSW	7.5-9.0	50	1,709	25.5	9.9	11.0	814	24.6	860/A/A
18	1021408	215/55R18	SL	95H	BSW	6.0-7.5	51	1,521	27.2	9.2	11.0	764	25.2	860/A/A
	1025073	225/40R18	XL	92V	BSW	7.5-9.0	50	1,389	24.9	9.4	10.0	833	20.8	800/A/A
	1025074	225/45R18	XL	95V	BSW	7.0-8.5	50	1,521	25.8	9.2	10.0	805	23.1	800/A/A
	1021403	225/50R18	SL	95H	BSW	6.0-8.0	51	1,521	26.8	9.8	11.0	775	25.4	860/A/A
	1021396	225/55R18	SL	98H	BSW	6.0-8.0	51	1,653	27.7	9.8	11.0	751	27.1	860/A/A
	1025075	225/60R18	SL	100H	BSW	6.0-8.0	51	1,764	28.5	9.1	11.0	729	27.9	860/A/A
	1025076	235/45R18	SL	94V	BSW	7.5-9.0	51	1,477	26.2	9.6	10.0	793	22.6	800/A/A
	1025077	235/50R18	SL	97V	BSW	6.5-8.5	51	1,609	27.2	10.1	10.0	765	26.9	800/A/A
	1025078	235/55R18	SL	100V	BSW	6.5-8.5	51	1,764	28.0	9.8	10.0	741	28.2	800/A/A
	1025079	235/60R18	XL	107V	BSW	6.5-8.5	50	2,149	29.0	9.6	10.5	717	29.5	800/A/A
	1025080	245/40R18	XL	97V	BSW	8.0-9.5	50	1,609	25.6	10.1	10.0	813	24.1	800/A/A
	1025081	245/45R18	XL	100V	BSW	7.5-9.0	50	1,764	26.5	9.9	10.0	783	26.1	800/A/A
	1025082	245/50R18	SL	100V	BSW	7.0-8.5	51	1,764	27.5	10.5	10.0	754	28.5	800/A/A
	1025083	245/55R18	SL	103V	BSW	7.0-8.5	51	1,929	28.5	10.4	10.0	729	30.1	800/A/A
	19	1025084	235/40R19	XL	96V	BSW	8.0-9.5	50	1,565	26.3	9.8	10.0	791	24.8
1025085		245/40R19	XL	98V	BSW	8.0-9.5	50	1,653	26.6	10.1	10.0	782	26.8	800/A/A
1025086		245/45R19	XL	102V	BSW	7.5-9.0	50	1,874	27.5	9.9	10.0	755	28.4	800/A/A
1025087		255/45R19	XL	104V	BSW	8.0-9.5	50	1,984	27.9	10.4	10.0	744	28.7	800/A/A

Technical data subject to change without prior notice.

Overall Diameter, Section Width, Tread Depth in inches. Weight in lbs.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

* Tires with a "V" speed rating have a 75K mile warranty.

Available Sizes

Kinergy ST | H735

Standard Touring All-Season

Inch	S-Code	Size	LI/SS	Sidewall	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Depth	Revs/ Mile	Weight	UTQG	
						psi	lbs							
13	1022033	175/70R13	SL	82T	BSW	4.5-6.0	51	1,047	22.6	7.0	8.5	920	13.7	680/A/A
14	1022037	175/65R14	SL	82T	BSW	5.0-6.0	51	1,047	22.9	7.3	8.5	909	14.3	680/A/A
	1021903	175/70R14	SL	84T	BSW	4.5-6.0	51	1,102	23.6	7.4	8.5	882	15.0	680/A/A
	1021904	185/60R14	SL	82T	BSW	5.0-6.5	51	1,047	22.6	8.0	8.5	918	14.8	680/A/A
	1021905	185/65R14	SL	86T	BSW	5.0-6.5	51	1,168	23.3	8.0	8.5	891	15.8	680/A/A
	1021906	185/70R14	SL	88T	BSW	4.5-6.0	51	1,235	24.1	7.7	8.5	861	16.0	680/A/A
	1022038	185/75R14	SL	89T	BSW	4.5-6.0	51	1,279	24.8	7.2	8.5	837	16.0	680/A/A
	1024733	185/75R14	SL	89T	WSW	4.5-6.0	51	1,279	24.8	7.2	8.5	837	16.7	680/A/A
	1021907	195/60R14	SL	86T	BSW	5.5-7.0	51	1,168	23.1	8.5	8.5	900	16.5	680/A/A
	1021908	195/70R14	SL	91T	BSW	5.0-6.5	51	1,356	24.7	8.2	8.5	842	17.3	680/A/A
	1022039	195/75R14	SL	92T	BSW	5.0-6.5	51	1,389	25.4	7.6	8.5	819	17.5	680/A/A
	1024734	195/75R14	SL	92T	WSW	5.0-6.5	51	1,389	25.4	7.6	8.5	819	18.6	680/A/A
	1022040	205/70R14	SL	95T	BSW	5.0-7.0	51	1,521	25.2	8.2	8.5	824	18.7	680/A/A
	1022041	205/75R14	SL	95T	BSW	5.0-7.0	51	1,521	26.0	7.8	8.5	799	18.9	680/A/A
	1024735	205/75R14	SL	95T	WSW	5.0-7.0	51	1,521	26.0	7.8	8.5	799	19.8	680/A/A
	1021909	215/70R14	SL	96T	BSW	5.5-7.0	51	1,565	25.8	8.9	8.5	806	20.1	680/A/A
	1021910	215/75R14	SL	100T	BSW	5.5-7.0	51	1,764	26.6	8.6	8.5	782	20.6	680/A/A
	1024736	215/75R14	SL	100T	WSW	5.5-7.0	51	1,764	26.6	8.4	8.5	782	21.0	680/A/A
	1021911	225/70R14	SL	99T	BSW	6.0-7.5	51	1,709	26.3	9.1	8.5	789	22.3	680/A/A
15	1024758	175/65R15	SL	84H	BSW	5.0-6.0	51	1,102	23.9	7.3	8.5	871	15.1	680/A/A
	1021912	185/60R15	SL	84T	BSW	5.0-6.5	51	1,102	23.6	8.0	8.5	880	15.4	680/A/A
	1021913	185/65R15	SL	88T	BSW	5.0-6.5	51	1,235	24.3	8.0	8.5	854	16.7	680/A/A
	1021914	195/60R15	SL	88T	BSW	5.5-7.0	51	1,235	24.1	8.5	8.5	862	17.4	680/A/A
	1021915	195/65R15	SL	91T	BSW	5.5-7.0	51	1,356	24.9	8.4	8.5	835	17.9	680/A/A
	1021916	205/60R15	SL	91T	BSW	5.5-7.5	51	1,356	24.6	8.7	8.5	846	18.3	680/A/A
	1021917	205/65R15	SL	94T	BSW	5.5-7.5	51	1,477	25.3	8.7	8.5	819	19.0	680/A/A
	1022042	205/70R15	SL	96T	BSW	5.0-7.0	51	1,565	26.2	8.2	8.5	792	19.4	680/A/A
	1022043	205/75R15	SL	97T	BSW	5.0-7.0	51	1,609	27.0	7.8	8.5	769	20.1	680/A/A
	1024737	205/75R15	SL	97T	WSW	5.0-7.0	51	1,609	27.0	7.8	8.5	769	21.0	680/A/A
	1021918	215/65R15	SL	96T	BSW	6.0-7.5	51	1,565	25.9	9.0	8.5	802	20.3	680/A/A
	1021919	215/70R15	SL	98T	BSW	5.5-7.0	51	1,653	26.8	8.9	8.5	776	22.2	680/A/A
	1022044	215/75R15	SL	100T	BSW	5.5-7.0	51	1,764	27.6	8.4	8.5	754	22.5	680/A/A
	1024738	215/75R15	SL	100T	WSW	5.5-7.0	51	1,764	27.6	8.4	8.5	754	23.3	680/A/A
	1022045	225/70R15	SL	100T	BSW	6.0-7.5	51	1,764	27.3	8.9	8.5	760	23.3	680/A/A
	1022046	225/75R15	SL	102T	BSW	6.0-7.5	51	1,874	28.2	8.5	8.5	737	24.3	680/A/A
	1024739	225/75R15	SL	102T	WSW	6.0-7.5	51	1,874	28.2	8.5	8.5	737	24.3	680/A/A
	1024759	235/60R15	SL	98T	RWL	6.5-8.5	51	1,653	26.0	9.7	8.5	800	23.9	680/A/A
	1021920	235/70R15	SL	103T	BSW	6.0-8.0	51	1,929	27.9	9.6	8.5	745	24.7	680/A/A
	1022047	235/75R15	SL	105T	BSW	6.0-8.0	51	2,039	28.7	9.1	8.5	723	26.6	680/A/A

Technical data subject to change without prior notice.

Overall Diameter, Section Width, Tread Depth in inches. Weight in lbs.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

Kinergy ST | H735

Standard Touring All-Season

Inch	S-Code	Size	LI/SS	Sidewall	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Depth	Revs/Mile	Weight	UTQG	
						psi	lbs							
15	1024740	235/75R15	SL	105T	WSW	6.0-8.0	51	2,039	28.7	9.1	8.5	723	26.9	680/A/A
	1024760	245/60R15	SL	101T	RWL	7.0-8.5	51	1,819	26.4	10.0	8.5	785	25.6	680/A/A
	1024761	255/60R15	SL	102T	RWL	7.0-9.0	51	1,874	26.9	10.3	8.5	771	26.8	680/A/A
	1024746	255/70R15	SL	108T	RWL	6.5-8.5	51	2,205	29.0	10.1	8.5	717	28.9	680/A/A
	1024777	P265/50R15	SL	99T	RWL	7.5-9.5	51	1,720	25.3	11.4	10.5	821	26.5	680/A/A
	1024762	P275/60R15	SL	107T	RWL	7.5-9.5	51	2,149	27.9	11.0	10.5	745	30.0	680/A/A
	1024763	P295/50R15	SL	105T	RWL	8.0-10.5	51	2,061	26.5	12.6	10.5	784	30.2	680/A/A
16	1021503	205/55R16	SL	91H	BSW	5.5-7.5	51	1,356	24.8	8.8	8.5	838	18.4	680/A/A
	1021500	205/60R16	SL	92T	BSW	5.5-7.5	51	1,389	25.6	8.7	8.5	813	19.5	680/A/A
	1021498	205/65R16	SL	95H	BSW	5.5-7.5	51	1,521	26.3	8.7	8.5	788	19.8	680/A/A
	1025088	215/55R16	XL	97H	BSW	6.0-7.5	50	1,609	25.1	9.2	8.5	827	21.4	680/A/A
	1021496	215/60R16	SL	95H	BSW	6.0-7.5	51	1,521	26.1	9.3	8.5	797	20.7	680/A/A
	1022048	215/65R16	SL	98T	BSW	6.0-7.5	51	1,653	26.9	8.8	8.5	772	22.1	680/A/A
	1021504	215/70R16	SL	100T	BSW	5.5-7.0	51	1,764	27.8	8.9	8.5	748	23.4	680/A/A
	1021495	225/60R16	SL	98T	BSW	6.0-8.0	51	1,653	26.5	9.6	8.5	784	23.1	680/A/A
	1025089	225/65R16	SL	100T	BSW	6.0-8.0	51	1,764	27.4	9.1	8.5	759	23.6	680/A/A
	1021506	225/70R16	SL	103T	BSW	6.0-7.5	51	1,929	28.3	9.1	8.5	734	24.8	680/A/A
	1021501	235/60R16	SL	100T	BSW	6.5-8.5	51	1,764	27.0	9.9	8.5	770	24.7	680/A/A
	1021499	235/65R16	SL	103T	BSW	6.5-8.5	51	1,929	27.9	9.7	8.5	744	25.5	680/A/A
17	1021508	215/50R17	SL	91H	BSW	6.0-7.5	51	1,356	25.4	9.4	8.5	818	19.3	680/A/A
	1021509	215/55R17	SL	94H	BSW	6.0-7.5	51	1,477	26.2	9.3	8.5	793	20.6	680/A/A
	1021502	215/60R17	SL	96T	BSW	6.0-7.5	51	1,565	27.1	9.3	8.5	768	23.0	680/A/A
	1021505	215/65R17	SL	99T	BSW	6.0-7.5	51	1,709	27.9	9.0	8.5	744	23.3	680/A/A
	1025090	225/45R17	SL	91H	BSW	7.0-8.5	51	1,356	24.8	9.2	8.5	837	18.9	680/A/A
	1021511	225/50R17	SL	94T	BSW	6.0-8.0	51	1,477	25.8	9.8	8.5	805	20.6	680/A/A
	1025091	225/55R17	SL	97H	BSW	6.0-8.0	51	1,609	26.6	9.6	8.5	780	23.5	680/A/A
	1021497	225/60R17	SL	99T	BSW	6.0-8.0	51	1,709	27.5	9.6	8.5	754	24.4	680/A/A
	1021507	225/65R17	SL	102T	BSW	6.0-8.0	51	1,874	28.4	9.4	8.5	731	24.7	680/A/A
	1025092	235/55R17	SL	99H	BSW	6.5-8.5	51	1,709	27.0	10.1	8.5	769	24.8	680/A/A
	1025093	235/60R17	SL	102T	BSW	6.5-8.5	51	1,874	28.0	9.6	8.5	742	25.1	680/A/A
	* 1036946	235/60R17	SL	102H	BSW	6.5-8.5	51	1,874	28.0	9.6	9.0	742	24.6	680/A/A
	1021510	235/65R17	SL	104H	BSW	6.5-8.5	51	1,984	28.9	9.7	8.5	718	26.5	680/A/A
	1025094	245/45R17	XL	99H	BSW	7.5-9.0	50	1,709	25.5	9.9	8.5	814	22.8	680/A/A
	18	1025095	225/50R18	XL	99T	BSW	6.0-8.0	50	1,709	26.8	9.5	8.5	776	23.4
* 1036947		225/50R18	XL	99H	BSW	6.0-8.0	50	1,709	26.8	9.5	9.0	776	23.0	680/A/A
1025096		225/55R18	SL	98H	BSW	6.0-8.0	51	1,653	27.6	9.6	8.5	752	24.8	680/A/A
1025097		225/60R18	SL	100H	BSW	6.0-8.0	51	1,764	28.5	9.3	8.5	729	25.6	680/A/A
1025098		235/55R18	SL	100H	BSW	6.5-8.5	51	1,764	28.0	10.1	8.5	741	25.7	680/A/A
1025099		235/60R18	XL	107H	BSW	6.5-8.5	50	2,149	29.0	9.6	8.5	717	28.0	680/A/A

*** Available 2H 2026**

Technical data subject to change without prior notice.

Overall Diameter, Section Width, Tread Depth in inches. Weight in lbs.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters





Weatherflex

CAR / SUV

Weatherflex GT (H755 & H755A)

About Hankook

Dynapro

ION

Ventus

Kinergy

Weatherflex

Winter

Vantra

Weatherflex GT (H755 / H755A)

All-Climate Confidence



Test & Design award




reddot winner 2025

Warranty



Designed for confident driving on snowy roads

Higher sipe density enhances traction in snow. Added sipes to the center and shoulder blocks boost snow performance.

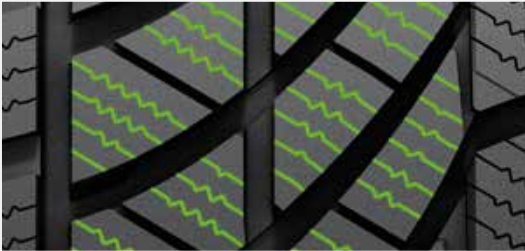


Additional stiffness improves Handling performance

An outer chamfer added to the block increases volume and stiffness, providing stable ground pressure for improved handling.



Designed to prevent irregular wear And enhance mileage

The Weatherflex GT design evenly distributes pressure to prevent irregular wear for a longer-lasting tire.

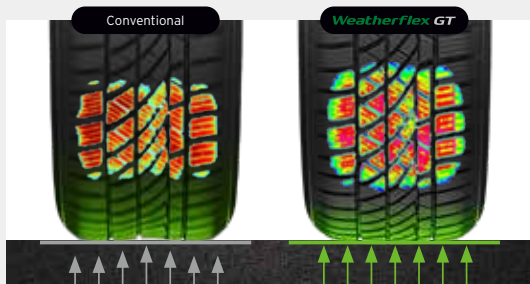

Zig-zag groove improves cornering performance

Zig-Zag Groove enhances cornering grip in the snow by contacting the road at various angles.




3d gripcontrol sipes dry & wet

Interlocking (Wave-Type) 3D sipes minimize block deformation when driving. The increased block stiffness improves handling in both wet and dry conditions.



New compound enhances both wet performance and tread life

Optimized compound improves both wet performance and mileage. Incorporating high levels of silica and resin enhances wet/dry grip. Additionally, optimizing silica dispersion in the new material improves tread life.

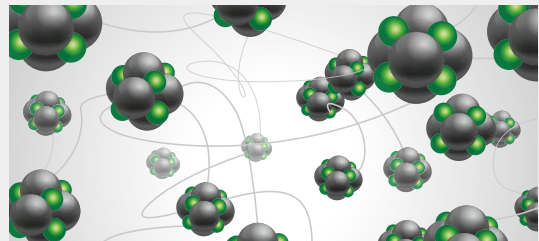

3PMSF certified



3PMSF (Three-Peak Mountain Snowflake) certification assures top performance on snowy roads and harsh winter conditions.

Available Sizes

Weatherflex GT | H755

Grand Touring All-Weather

Inch	S-Code	Size	LI/SS	Sidewall	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Depth	Revs/ Mile	Weight	UTQG	Tech
						psi	lbs							
15	1035947	195/65R15	SL	91H	BSW	5.5-7.0	51	1,356	25	8.2	10.5	832	18.3	640/A/A 3PMSF
16	1035948	205/55R16	SL	91H	BSW	5.5-7.5	51	1,356	24.9	8.9	10.5	835	20.7	640/A/A 3PMSF
	1035981	205/60R16	SL	92V	BSW	5.5-7.5	51	1,389	25.5	8.6	10.5	815	19.9	640/A/A 3PMSF
	1036400	205/65R16	SL	95H	BSW	5.5-7.5	51	1,521	26.3	8.5	10.5	791	21.0	640/A/A 3PMSF
	1035974	215/55R16	XL	97H	BSW	6.0-7.5	50	1,609	25.2	9.2	10.5	824	22.5	640/A/A 3PMSF
	1035949	215/60R16	SL	95H	BSW	6.0-7.5	51	1,521	26.1	9.1	10.5	797	22.1	640/A/A 3PMSF
	1035976	225/60R16	SL	98H	BSW	6.0-8.0	51	1,653	26.5	9.3	10.5	784	24.5	640/A/A 3PMSF
17	1035957	205/50R17	XL	93V	BSW	5.5-7.5	50	1,433	25.0	8.8	10.5	832	20.5	640/A/A 3PMSF
	1035953	215/45R17	XL	91V	BSW	7.0-8.0	50	1,356	24.5	8.7	10.5	848	19.7	640/A/A 3PMSF
	1035960	215/50R17	XL	95V	BSW	6.0-7.5	50	1,521	25.5	9.6	10.5	814	23.5	640/A/A 3PMSF
	1035945	215/55R17	SL	94V	BSW	6.0-7.5	51	1,477	26.2	9.1	10.5	794	21.1	640/A/A 3PMSF
	1035982	225/45R17	XL	94V	BSW	7.0-8.5	50	1,477	25.0	9.3	10.5	832	22.6	640/A/A 3PMSF
	1035956	225/50R17	XL	98V	BSW	6.0-8.0	50	1,653	25.9	9.7	10.5	802	24.3	640/A/A 3PMSF
	1035955	225/55R17	XL	101V	BSW	6.0-8.0	50	1,819	26.7	9.6	10.5	778	25.4	640/A/A 3PMSF
	1035958	235/55R17	SL	99V	BSW	6.5-8.5	51	1,709	27.0	10.0	10.5	769	26.7	640/A/A 3PMSF
18	1036401	215/55R18	SL	95H	BSW	6.0-7.5	51	1,521	27.1	9.4	10.5	767	23.9	640/A/A 3PMSF
	1035979	225/45R18	XL	95V	BSW	7.0-8.5	50	1,521	25.7	9.2	10.5	808	23.5	640/A/A 3PMSF
	1036402	235/40R18	XL	95V	BSW	8.0-9.5	50	1,521	25.3	9.8	10.0	822	23.8	640/A/A 3PMSF
	1035965	235/45R18	XL	98V	BSW	7.5-9.0	50	1,653	26.2	9.6	10.5	794	24.7	640/A/A 3PMSF
	1035966	235/50R18	SL	97V	BSW	6.5-8.5	51	1,609	27.2	10.0	10.5	765	26.6	640/A/A 3PMSF
19	1035969	235/40R19	XL	96V	BSW	8.0-9.5	50	1,565	26.2	9.8	10.5	794	24.6	640/A/A 3PMSF

Technical data subject to change without prior notice.

Overall Diameter, Section Width, Tread Depth in inches. Weight in lbs.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

Mileage, Road Hazard, and 30 Day Free Trial warranties apply only to replacement tires. Original Equipment tires are excluded.

Tech : Hankook Innovative Technology HRS : Hankook HRS System SOA : Sound Absorber SEG : Sealguard EV : Electric Vehicle

Weatherflex GT | H755A

Grand Touring All-Weather

Inch	S-Code	Size	LI/SS	Sidewall	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Depth	Revs/ Mile	Weight	UTQG	Tech
						psi	lbs							
16	1036136	215/65R16	SL	98V	BSW	6.0-7.5	51 1,653	26.9	8.8	10.5	771	24.3	640/A/A	3PMSF
	1036124	215/70R16	SL	100H	BSW	5.5-7.0	51 1,764	27.7	8.7	10.5	750	24.6	640/A/A	3PMSF
17	1036386	215/65R17	SL	99H	BSW	6.0-7.5	51 1,709	27.8	8.9	10.5	746	24.8	640/A/A	3PMSF
	1036128	225/60R17	SL	99H	BSW	6.0-8.0	51 1,709	27.6	9.4	10.5	754	24.7	640/A/A	3PMSF
	1036117	225/65R17	SL	102H	BSW	6.0-8.0	51 1,874	28.4	9.2	10.5	731	28.1	640/A/A	3PMSF
	1036389	235/60R17	SL	102H	BSW	6.5-8.5	51 1,874	27.9	9.8	10.0	744	26.9	640/A/A	3PMSF
	1036122	235/65R17	SL	104H	BSW	6.5-8.5	51 1,984	29.0	9.8	10.5	717	29.3	640/A/A	3PMSF
	1036125	245/65R17	SL	107H	BSW	7.0-8.5	51 2,149	29.4	9.8	10.5	707	30.1	640/A/A	3PMSF
	1036130	265/70R17	SL	115H	BSW	7.0-9.0	51 2,679	31.5	10.6	10.5	659	36.6	640/A/A	3PMSF
	1036132	225/55R18	SL	98V	BSW	6.0-8.0	51 1,653	27.6	9.6	10.5	754	25.5	640/A/A	3PMSF
18	1036129	225/60R18	SL	100H	BSW	6.0-8.0	51 1,764	28.5	9.4	10.5	730	26.9	640/A/A	3PMSF
	1036121	235/55R18	SL	100V	BSW	6.5-8.5	51 1,764	28.0	9.9	10.5	741	28.1	640/A/A	3PMSF
	1036133	235/60R18	XL	107V	BSW	6.5-8.5	50 2,149	29	9.8	10.5	716	29.6	640/A/A	3PMSF
	1036120	235/65R18	SL	106H	BSW	6.5-8.5	51 2,094	29.9	9.5	10.5	695	30.5	640/A/A	3PMSF
	1036118	245/60R18	SL	105H	BSW	7.0-8.5	51 2,039	29.4	10.1	10.5	706	30.0	640/A/A	3PMSF
	1036394	255/65R18	SL	111H	BSW	7.0-9.0	51 2,403	30.9	10.4	10.0	672	32.5	640/A/A	3PMSF
	1036126	265/60R18	SL	110V	BSW	7.5-9.5	51 2,337	30.3	11	10.5	685	34.4	640/A/A	3PMSF
	1036396	265/65R18	SL	114H	BSW	7.5-9.5	51 2,601	31.4	10.9	10.5	661	36.3	640/A/A	3PMSF
	1036398	275/65R18	SL	116H	BSW	7.5-9.5	51 2,756	31.9	11.1	11.0	649	39.9	640/A/A	3PMSF
	1036387	225/55R19	XL	103V	BSW	6.0-8.0	50 1,929	28.7	9.7	10.5	724	27.5	640/A/A	3PMSF
19	1036388	235/50R19	XL	103V	BSW	6.5-8.5	50 1,929	28.1	10.3	10.5	737	27.0	640/A/A	3PMSF
	1036134	235/55R19	XL	105V	BSW	6.5-8.5	50 2,039	29	9.8	10.5	715	30.2	640/A/A	3PMSF
	1036123	245/55R19	SL	103V	BSW	7.0-8.5	51 1,929	29.5	10.4	10.5	704	30.3	640/A/A	3PMSF
	1036391	255/45R19	XL	104V	BSW	8.0-9.5	50 1,984	27.9	10.4	10.0	743	29.4	640/A/A	3PMSF
	1036131	235/55R20	SL	102V	BSW	6.5-8.5	51 1,874	30.0	10.2	10.5	693	29.8	640/A/A	3PMSF
20	1036390	245/50R20	SL	102V	BSW	7.0-8.5	51 1,874	29.5	10.6	9.5	703	29.9	640/A/A	3PMSF
	1036392	255/45R20	XL	105V	BSW	8.0-9.5	50 2,039	28.9	10.4	10.0	718	31.3	640/A/A	3PMSF
	1036135	255/50R20	XL	109V	BSW	7.0-9.0	50 2,271	29.9	11.1	10.5	693	31.9	640/A/A	3PMSF
	1036393	255/55R20	XL	110V	BSW	7.0-9.0	50 2,337	30.9	10.9	10.0	672	34.3	640/A/A	3PMSF
	1036395	265/50R20	XL	111V	BSW	7.5-9.5	50 2,403	30.3	11.5	10.5	685	34.4	640/A/A	3PMSF
	1036119	275/55R20	SL	113H	BSW	7.5-9.5	51 2,535	31.8	11.6	10.5	654	37.8	640/A/A	3PMSF
	1036127	275/60R20	SL	115H	BSW	7.5-9.5	51 2,679	32.8	11.4	10.5	633	39.6	640/A/A	3PMSF
	1036397	275/50R22	SL	111H	BSW	7.5-9.5	51 2,403	32.7	11.8	11.0	634	37.7	640/A/A	3PMSF
22	1036399	285/45R22	XL	114H	BSW	9.0-10.5	50 2,601	31.9	11.5	11.0	650	39.2	640/A/A	3PMSF

Technical data subject to change without prior notice.

Overall Diameter, Section Width, Tread Depth in inches. Weight in lbs.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

Mileage, Road Hazard, and 30 Day Free Trial warranties apply only to replacement tires. Original Equipment tires are excluded.

Tech : Hankook Innovative Technology HRS : Hankook HRS System SOA : Sound Absorber SEG : Sealguard EV : Electric Vehicle





Winter *i*cept*

Winter i*cept evo4 (W340)

Winter i*cept evo4 SUV (W340A)

Winter i*cept iZ3 (W636)

Winter i*cept iZ3 X (W636A)

Winter *i*Pike*

Winter i*Pike RS2 (W429)

Winter i*Pike X (W429A)

i*Pike RW11 (RW11)

Winter i*Pike LV (RW15)

About Hankook

Dynapro

iON

Ventus

Kinergy

WeatherFlex

Winter

Vantra

Winter *i*cept* evo⁴ (W340)

Winter *i*cept* evo⁴ SUV (W340A)

Take Control, All Winter, Every Mile

NEW



Warranty

FREE TRIAL

30
DAYS

LIMITED TREADWEAR
WARRANTY


30K
MI

WARRANTY

**ROAD
HAZARD**

Snow-Gripping Confidence

Wide lateral groove



Lateral grooves widened by 2% secures a stronger grip and strong traction and stable control on snowy roads.


Semi-sipe technology



Semi-sipes applied to the middle and shoulder blocks enhance snow grip, providing stable driving during acceleration, braking, and cornering.




Snow acceleration
7% Improved



Snow handling
8% Improved




Snow braking
2% Improved




Confidence That Doesn't Slip



Wet braking
2% Improved



Superior hydroplaning resistance




V-shaped treads disperse water quickly out both sides, reducing hydroplaning and keeping driving stable on wet roads.

Save Energy. Gain Distance.


Balanced wear design for longer mileage

Designed with a larger contact area to evenly distribute ground pressure, it offers 15% better wear resistance than the previous model, providing longer tire life and reliable performance.

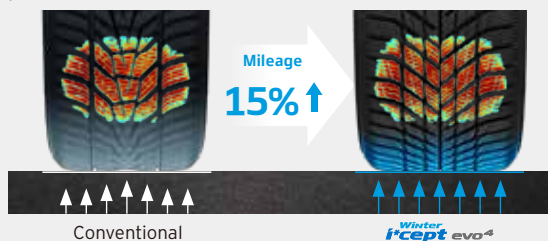

Applying chamfer technology

By diagonally cutting the contact area, impact noise from sudden braking or steering is reduced, enhancing quietness and overall driving comfort.

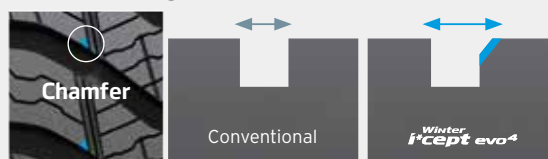

Winter i*Pike RS² (W429)

Winter i*Pike^x (W429A)

The new specialty for the northern winter




Test & Design award



reddot winner 2020


Claw edge

The claw edges on both sides of the tread provide better grip performance on snow.

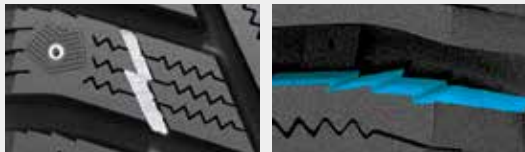

The new stud technology


Empty space is designed at the bottom of the Stud pin to reduce impact from the road and improve performance by increasing the number of pins

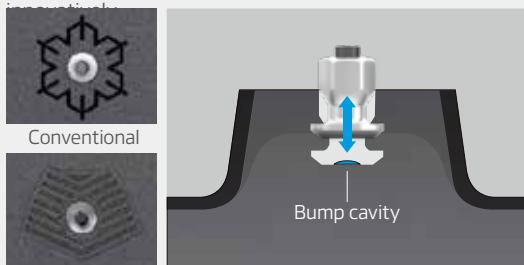

Winter i^PPike RS²

3D sipe technology

Optimized 3D sipe technology ensures better handling performance during winter driving.

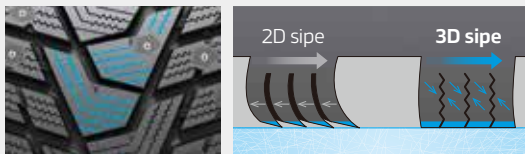

Ice slit design technology

Innovative ice slit design technology provides excellent ice traction.



Zig-zag winter groove



Z-shape deep snow grooves on the tread provide maximised grip performance on the deep snow.

Wide center block



Wide block in the center of the tread provides improved snow and ice traction.

2-in-1 shoulder block



Unique shoulder block design ensures better grip during the winter driving.


Side edge



The step-down design provides better Side snow grip by increasing friction surface and edge in deep snow road.

Ice-philic silica

Ice-philic silica particles are uniformly distributed to maintain soft rubber compounds in cold conditions.

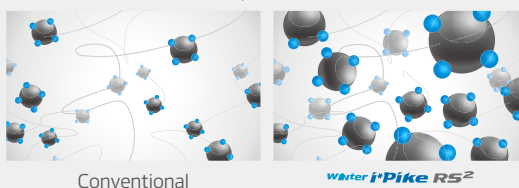

Conventional

Winter i^PPike RS²

Winter i*cept iZ³ (W636)

Winter i*cept iZ³ X (W636A)

Confident driving and durability for extreme winter



Warranty



Ice-grip slits


Angled sharp-edge slits improve grip on icy road.

Wide shoulder blocks

Wider outside shoulder block ensures winter traction.

3D winter sipe

Serrated winter sipe improves braking performance in winter driving.

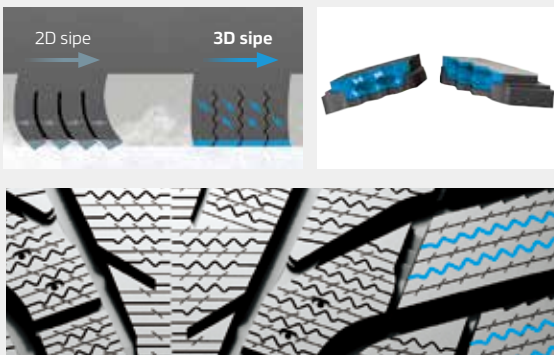


Handle every winter

3D winter sipe and V-shaped wide grooves provide enhanced braking and steering on icy, wet, and dry roads.



V-shaped pattern + wide lateral groove

Main groove help to distribute water to the side, improves water displacing capability.

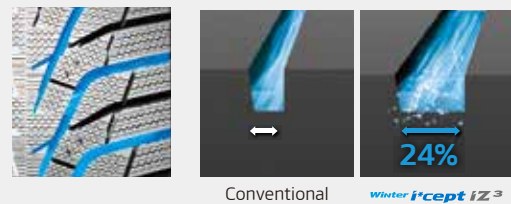


i*Pike RW11 (RW11)

Satisfies On & Off-Road Winter Performance Needs



Improving stud durability




New shaped stud design.

- Preventing the stud from being separated or moved.
- Improving snow & ice grip with stud firmly fixed.

Reduce impact & preventing penetration caused by movement using special rubber compound with high-solidity, thereby enhancing the durability of stud.

Center block

Block at the center area that consist of a series of rib form improves snow & ice traction

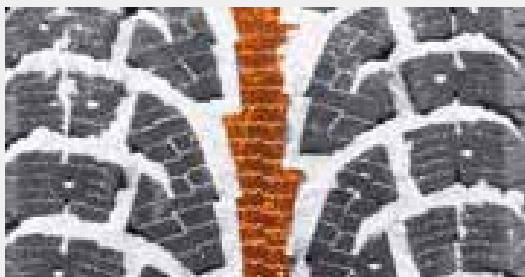

Cliff groove

Maximized snow edge effect on groove walls improving excretion and draining ability



Increased kerf center block

Lateral kerf is adopted to maximize snow traction performance

Wide tread design

The optimal contact area is expanded by as much as 8%, improving braking performance on snowy and icy roads.



Conventional



i*Pike RW11



Available Sizes

Winter i*cept evo⁴ | W340 **Studless**

Ultra-High Performance Winter

Inch	S-Code	Size	LI/SS	Sidewall	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Depth	Revs/Mile	Weight	Tech	
						psi	lbs							
17	1037714	225/60R17	XL	103V	BSW	6.0-8.0	50	1,929	27.4	9.4	10.0	758	25.2	3PMSF
	1037660	235/45R17	XL	97V	BSW	7.5-9.0	50	1,609	25.2	9.6	10.0	825	23.2	3PMSF
	1037813	235/50R17	XL	100V	BSW	6.5-8.5	50	1,764	26.1	10.3	10.0	794	24.7	3PMSF
	1037696	245/45R17	XL	99V	BSW	7.5-9.0	50	1,709	25.5	9.9	10.0	814	24.6	3PMSF
18	1037774	225/40R18	XL	92V	BSW	7.5-9.0	50	1,389	24.9	9.4	10.0	835	20.3	3PMSF
	1037719	225/45R18	XL	95V	BSW	7.0-8.5	50	1,521	25.7	9.2	10.0	807	21.9	3PMSF
	1037699	225/55R18	XL	102V	BSW	6.0-8.0	50	1,874	27.6	9.7	10.0	754	25.5	3PMSF
	1037690	235/40R18	XL	95V	BSW	8.0-9.5	50	1,521	25.3	9.8	10.0	822	22.0	3PMSF
	1037698	235/45R18	XL	98V	BSW	7.5-9.0	50	1,653	26.2	9.6	10.0	793	24.3	3PMSF
	1037820	245/40R18	XL	97V	BSW	8.0-9.5	50	1,609	25.5	10.1	10.0	815	22.3	3PMSF
	1037702	245/45R18	XL	100V	BSW	7.5-9.0	50	1,764	26.5	9.9	10.0	783	25.6	3PMSF
	1037676	245/50R18	XL	104V	BSW	7.0-8.5	50	1,984	27.5	10.6	10.0	755	28.7	3PMSF
19	1037781	225/40R19	XL	93V	BSW	7.5-9.0	50	1,433	25.9	9.4	10.0	802	21.5	3PMSF
	1037803	225/45R19	XL	96V	BSW	7.0-8.5	50	1,565	26.7	9.2	10.0	777	22.7	3PMSF
	1037800	235/35R19	XL	91W	BSW	8.0-9.5	50	1,356	25.4	9.8	10.0	819	21.5	3PMSF
	1037713	235/40R19	XL	96V	BSW	8.0-9.5	50	1,565	26.3	9.8	10.0	791	23.5	3PMSF
	1037802	235/45R19	XL	TBD	BSW	7.5-9.0	50	TBD	TBD	TBD	TBD	TBD	TBD	3PMSF
	1037789	245/35R19	XL	93W	BSW	8.0-9.5	50	1,433	25.6	10.1	10.0	813	21.9	3PMSF
	1037740	245/40R19	XL	98V	BSW	8.0-9.5	50	1,653	26.4	10.2	10.5	787	24.4	3PMSF
	1037837	245/45R19	XL	102V	BSW	7.5-9.0	50	1,874	27.7	10.4	10.5	750	27.0	3PMSF
	1037776	255/35R19	XL	96V	BSW	8.5-10.0	50	1,565	25.8	10.7	10.0	804	23.9	3PMSF
	1037695	255/40R19	XL	100V	BSW	8.5-10.0	50	1,764	26.8	10.6	10.0	775	24.8	3PMSF
	1037790	255/50R19	XL	107V	BSW	7.0-9.0	50	2,149	28.9	11.1	10.0	718	31.9	3PMSF
	1037767	285/40R19	XL	107V	BSW	9.5-11.0	50	2,149	27.9	11.8	10.0	745	31.1	3PMSF
20	1037809	235/35R20	XL	TBD	BSW	8.0-9.5	50	TBD	TBD	TBD	10.0	TBD	21.8	3PMSF
	1037785	245/40R20	XL	99W	BSW	8.0-9.5	50	1,709	27.5	10.1	10.0	755	24.9	3PMSF
	1037804	245/45R20	XL	103V	BSW	7.5-9.0	50	1,929	28.6	9.9	10.0	727	28.8	3PMSF
	1037754	255/40R20	XL	101W	BSW	8.5-10.0	50	1,819	27.8	10.6	10.0	747	26.3	3PMSF
21	1037796	255/35R21	XL	98W	BSW	8.5-10.0	50	1,653	27.8	10.7	10.0	748	25.4	3PMSF
	1037757	265/35R21	XL	101W	BSW	9.0-10.5	50	1,819	28.1	11.1	10.0	739	27.1	3PMSF
	1037811	275/35R21	XL	103W	BSW	9.0-11.0	50	1,929	28.5	11.7	10.0	730	30.6	3PMSF
	1037799	295/30R21	XL	102W	BSW	10.0-11.0	50	1,874	27.9	11.7	10.0	746	30.4	3PMSF

Technical data subject to change without prior notice.

Overall Diameter, Section Width, Tread Depth in inches. Weight in lbs.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

Mileage, Road Hazard, and 30 Day Free Trial warranties apply only to replacement tires. Original Equipment tires are excluded.

Tech : Hankook Innovative Technology HRS : Hankook HRS System SOA : Sound Absorber SEG : Sealguard EV : Electric Vehicle

Winter i*cept evo⁴ SUV | W340A **Studless**
Ultra-High Performance Winter

Inch	S-Code	Size	LI/SS	Sidewall	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Depth	Revs/Mile	Weight	Tech	
						psi	lbs							
17	1037823	225/65R17	XL	106H	BSW	6.0-8.0	50	2,094	28.3	9.2	10.0	734	27.0	3PMSF
	1037688	235/65R17	XL	108V	BSW	6.5-8.5	50	2,205	28.9	9.6	10.0	719	28.6	3PMSF
	1037722	255/65R17	XL	TBD	BSW	7.0-9.0	50	TBD	TBD	TBD	12.5	TBD	31.5	3PMSF
18	1037821	225/60R18	XL	104V	BSW	6.0-8.0	50	1,984	28.5	9.4	10.0	728	27.6	3PMSF
	1037706	235/55R18	XL	104V	BSW	6.5-8.5	50	1,984	28.0	10.2	10.0	741	28.3	3PMSF
	1037703	235/60R18	XL	107H	BSW	6.5-8.5	50	2,149	28.9	9.8	10.0	718	28.6	3PMSF
	1037708	235/65R18	XL	110H	BSW	6.5-8.5	50	2,337	29.8	9.6	10.0	697	28.8	3PMSF
	1037768	245/60R18	SL	TBD	BSW	7.0-8.5	50	TBD	TBD	TBD	12.5	TBD	28.7	3PMSF
	1037689	255/55R18	XL	109V	BSW	7.0-9.0	50	2,271	28.9	10.9	10.0	720	31.3	3PMSF
	1037675	255/60R18	XL	112V	BSW	7.0-9.0	50	2,469	29.9	10.6	10.0	694	32.6	3PMSF
	1037801	265/60R18	XL	114H	BSW	7.5-9.5	50	2,601	30.4	11.0	10.0	684	33.9	3PMSF
19	1037663	225/55R19	XL	103V	BSW	6.0-8.0	50	1,929	28.6	9.7	10.0	726	26.7	3PMSF
	1037727	235/50R19	XL	103V	BSW	6.5-8.5	50	1,929	28.2	10.3	10.0	737	27.9	3PMSF
	1037718	235/55R19	XL	105V	BSW	6.5-8.5	50	2,039	29.0	10.2	10.0	716	28.8	3PMSF
	1037674	245/50R19	XL	105V	BSW	7.0-8.5	50	2,039	28.5	10.6	10.0	729	29.4	3PMSF
	1037659	255/55R19	XL	111V	BSW	7.0-9.0	50	2,403	29.9	10.9	10.0	696	32.7	3PMSF
	1037794	265/50R19	XL	110V	BSW	7.5-9.5	50	2,337	29.3	11.5	10.0	708	32.2	3PMSF
20	1037739	235/50R20	XL	104W	BSW	6.5-8.5	50	1,984	29.2	10.3	10.0	712	29.5	3PMSF
	1037793	235/55R20	XL	105V	BSW	6.5-8.5	50	2,039	30.0	10.2	10.0	692	30.1	3PMSF
	1037760	245/50R20	XL	TBD	BSW	7.0-8.5	50	TBD	TBD	TBD	TBD	TBD	TBD	3PMSF
	1037741	255/45R20	XL	105V	BSW	8.0-9.5	50	2,039	29.0	10.4	10.0	717	31.4	3PMSF
	1037783	255/50R20	XL	109V	BSW	7.0-9.0	50	2,271	29.9	11.1	10.0	695	32.8	3PMSF
	1037682	255/55R20	XL	110V	BSW	7.0-9.0	50	2,337	30.9	10.9	10.0	673	33.9	3PMSF
	1037797	265/45R20	XL	108V	BSW	8.5-10.0	50	2,205	29.3	10.8	10.0	709	31.6	3PMSF
	1037808	265/50R20	XL	111V	BSW	7.5-9.5	50	2,403	30.3	11.5	10.0	685	33.4	3PMSF
	1037791	275/40R20	XL	106V	BSW	9.0-11.0	50	2,094	28.6	11.3	10.0	726	31.8	3PMSF
	1037729	275/45R20	XL	TBD	BSW	8.5-10.5	50	TBD	TBD	TBD	10.0	TBD	33.9	3PMSF
	1037716	275/50R20	XL	113V	BSW	7.5-9.5	50	2,535	30.7	11.8	10.0	676	36.2	3PMSF
	1037661	285/45R20	XL	112V	BSW	9.0-10.5	50	2,469	30.0	11.5	10.0	692	35.5	3PMSF
	1037756	295/45R20	XL	114V	BSW	9.5-11.0	50	2,601	30.4	12.0	10.0	684	37.1	3PMSF
21	1037784	255/40R21	XL	102V	BSW	8.5-10.0	50	1,874	28.9	10.6	10.0	719	27.8	3PMSF
	1037720	275/40R21	XL	107V	BSW	9.0-11.0	50	2,149	29.6	11.3	10.0	702	32.9	3PMSF
	1037788	275/45R21	XL	110V	BSW	8.5-10.5	50	2,337	30.7	11.1	10.0	678	35.5	3PMSF
	1037668	285/45R21	XL	113W	BSW	9.0-10.5	50	2,535	31.0	11.5	10.0	670	36.7	3PMSF
	1037683	295/35R21	XL	107V	BSW	10.0-11.5	50	2,149	29.0	12.2	10.0	716	32.8	3PMSF
22	1037673	275/40R22	XL	107V	BSW	9.0-11.0	50	2,149	30.6	11.3	10.0	679	34.3	3PMSF
	1037666	285/40R22	XL	TBD	BSW	9.5-11.0	50	TBD	TBD	TBD	TBD	TBD	35.7	3PMSF
	1037772	285/45R22	XL	TBD	BSW	9.0-10.5	50	TBD	TBD	TBD	12.5	TBD	35.6	3PMSF
	1037819	315/30R22	XL	107V	BSW	10.5-11.5	50	2,149	29.3	12.4	10.0	708	34.6	3PMSF
	1037669	315/35R22	XL	111V	BSW	10.5-12.5	50	2,403	30.6	12.9	10.0	678	37.9	3PMSF

About Hankook

Dynapro

iON

Ventus

Kinergy

WeatherFlex

Winter

Vantra

Available Sizes

Winter i*Pike RS² | W429

Studdable & Studded Winter

S-Code								Max. Load					Weight				
		Factory Stud				Rim Width Range								Non-Stud	Factory Stud	Tech	
Inch	Non-Stud		Size	LI/SS	Sidewall		psi	lbs	Overall Diameter	Section Width	Tread Depth	Revs/ Mile					
13	1026791	1026790	175/70R13	SL	82T	BSW	4.5-6.0	51	1,047	22.6	7.0	11.0	920	15.0	15.4	3PMSF	
14	1028949	1029017	175/65R14	SL	82T	BSW	5.0-6.0	51	1,047	22.9	7.3	11.0	909	15.5	15.9	3PMSF	
	1026793	1026792	175/70R14	XL	88T	BSW	4.5-6.0	50	1,235	23.6	7.0	11.0	882	16.3	16.7	3PMSF	
	1026817	1026816	185/60R14	SL	82T	BSW	5.0-6.5	51	1,047	22.6	7.4	11.0	917	16.6	16.9	3PMSF	
	1028950	1029018	185/65R14	SL	86T	BSW	5.0-6.5	51	1,168	23.3	7.8	11.0	891	17.4	17.8	3PMSF	
	1028951	1029019	185/70R14	SL	88T	BSW	4.5-6.0	51	1,235	24.1	7.5	11.0	861	17.8	18.1	3PMSF	
	1028943	1029011	195/70R14	SL	91T	BSW	5.0-6.5	51	1,356	24.7	7.9	11.0	842	18.5	18.9	3PMSF	
15	1028956	1029024	185/55R15	XL	86T	BSW	5.0-6.5	50	1,168	22.9	7.8	11.0	908	17.3	17.7	3PMSF	
	1028934	1029002	185/60R15	SL	84T	BSW	5.0-6.5	51	1,102	23.6	7.8	11.0	880	17.4	17.7	3PMSF	
	1028929	1028997	185/65R15	SL	88T	BSW	5.0-6.5	51	1,235	24.3	7.8	11.0	854	18.4	18.8	3PMSF	
	1028936	1029004	195/60R15	SL	88T	BSW	5.5-7.0	51	1,235	24.1	8.2	11.0	862	18.7	19.1	3PMSF	
	1026821	1026820	195/65R15	SL	91T	BSW	5.0-6.5	51	1,356	24.9	8.1	11.0	835	20.6	21.0	3PMSF	
	1028954	1029022	205/60R15	SL	91T	BSW	5.5-7.5	51	1,356	24.6	8.6	11.0	846	20.1	20.4	3PMSF	
	1026825	1026824	205/65R15	SL	94T	BSW	5.5-7.5	51	1,477	25.3	8.5	11.0	819	21.4	21.7	3PMSF	
	1028945	1029013	215/70R15	SL	98T	BSW	5.5-7.0	51	1,653	26.8	8.7	11.0	776	24.0	24.4	3PMSF	
	16	1028944	1029012	195/55R16	SL	87T	BSW	5.5-7.0	51	1,201	24.3	8.4	11.0	856	18.8	19.2	3PMSF
1028953		1029021	205/50R16	SL	87T	BSW	5.5-7.5	51	1,201	23.9	8.9	11.0	867	19.2	19.6	3PMSF	
1026801		1026800	205/55R16	XL	94T	BSW	5.5-7.5	50	1,477	24.7	9.1	11.0	840	21.1	21.5	3PMSF	
1028925		1028993	205/60R16	SL	92T	BSW	5.5-7.5	51	1,389	25.6	8.6	11.0	813	21.6	22.1	3PMSF	
1026827		1026826	205/65R16	SL	95T	BSW	5.5-7.5	51	1,521	26.3	8.5	11.0	788	22.8	23.2	3PMSF	
1026803		1026802	215/55R16	XL	97T	BSW	6.0-7.5	50	1,609	25.1	8.9	11.0	827	24.1	24.4	3PMSF	
1026829		1026828	215/60R16	XL	99T	BSW	6.0-7.5	50	1,709	26.0	9.0	11.0	798	25.0	25.4	3PMSF	
1028927		1028995	215/65R16	SL	98T	BSW	6.0-7.5	51	1,653	26.9	8.8	11.0	772	25.6	25.6	3PMSF	
1028935		1029003	225/60R16	XL	102T	BSW	6.0-8.0	50	1,874	26.5	9.3	11.0	784	25.4	25.8	3PMSF	
17		1026831	1026830	205/50R17	XL	93T	BSW	5.5-7.5	50	1,433	25.0	8.9	11.0	832	20.5	20.9	3PMSF
	1032477	1032478	205/55R17	XL	95T	BSW	5.5-7.5	50	1,521	25.8	9.1	11.0	806	22.6	22.4	3PMSF	
	1028941	1029009	215/45R17	SL	87T	BSW	7.0-8.0	51	1,201	24.5	8.7	11.0	848	19.5	19.8	3PMSF	
	1026835	1026834	215/50R17	XL	95T	BSW	6.0-8.0	50	1,521	25.4	9.4	11.0	819	23.5	23.9	3PMSF	
	1028926	1028994	215/55R17	SL	94T	BSW	6.0-7.5	51	1,477	26.2	9.1	11.0	794	23.7	24.1	3PMSF	
	1026841	1026840	225/45R17	XL	94T	BSW	7.0-8.5	50	1,477	24.8	9.2	11.0	837	22.6	22.9	3PMSF	
	1026839	1026838	225/50R17	XL	98T	BSW	6.0-8.0	50	1,653	25.8	9.7	11.0	806	25.6	26.0	3PMSF	
	1026837	1026836	225/55R17	XL	101T	BSW	6.0-8.0	50	1,819	26.6	9.6	11.0	780	26.2	26.6	3PMSF	
	1028946	1029014	235/45R17	XL	97T	BSW	7.5-9.0	50	1,609	25.2	9.6	11.0	824	24.5	24.9	3PMSF	
	1026805	1026804	235/55R17	XL	103T	BSW	6.5-8.5	50	1,929	27.0	10.2	11.0	769	27.8	28.2	3PMSF	
	18	1029708	1029710	215/55R18	SL	95T	BSW	6.0-7.5	51	1,521	27.2	9.1	11.0	765	25.5	25.9	3PMSF
		1028940	1029008	225/50R18	SL	95T	BSW	6.0-8.0	51	1,521	26.8	9.7	11.0	776	27.2	27.5	3PMSF
1032480		1032479	235/45R18	XL	98T	BSW	7.5-9.0	50	1,653	26.2	9.6	11.0	793	25.3	25.3	3PMSF	
1028948		1029016	245/45R18	XL	100T	BSW	7.5-9.0	50	1,764	26.5	9.9	11.0	783	27.0	27.4	3PMSF	

Technical data subject to change without prior notice.

Overall Diameter, Section Width, Tread Depth in inches. Weight in lbs.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

Mileage, Road Hazard, and 30 Day Free Trial warranties apply only to replacement tires. Original Equipment tires are excluded.

Tech : Hankook Innovative Technology HRS : Hankook HRS System SOA : Sound Absorber SEG : Sealguard EV : Electric Vehicle

Winter i*Pike^x | W429A

Studdable & Studded Winter

Inch	S-Code		Size	LI/SS	Sidewall	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Depth	Revs/ Mile	Weight		Tech
	Non-Stud	Factory Stud					psi	lbs					Non-Stud	Factory Stud	
15	1026809	1026808	205/70R15	SL 96T	BSW	5.0-7.0	51	1,565	26.4	8.3	12.5	786	25.5	25.8	3PMSF
	1028952	1029020	205/75R15	SL 97T	BSW	5.0-7.0	51	1,609	27.1	8.1	12.5	767	25.9	26.2	3PMSF
	1026041	1026770	235/75R15	XL 109T	BSW	6.0-8.0	50	2,271	28.8	9.0	12.5	721	31.1	31.4	3PMSF
16	1026807	1026806	215/70R16	SL 100T	BSW	5.5-7.0	51	1,764	27.9	8.8	12.5	745	27.9	28.2	3PMSF
	1028494	1029888	225/65R16	SL 100T	BSW	6.0-8.0	51	1,764	27.4	9.3	12.5	758	28.2	28.6	3PMSF
	1028947	1029015	225/70R16	XL 107T	BSW	6.0-7.5	50	2,149	28.4	8.9	12.5	732	30.0	30.4	3PMSF
	1026040	1026771	225/75R16	SL 104T	BSW	6.0-7.5	51	1,984	29.2	8.6	12.5	710	30.4	30.8	3PMSF
	1028496	1029889	235/65R16	SL 103T	BSW	6.5-8.5	51	1,929	28.0	9.4	12.5	743	30.1	30.6	3PMSF
	1028930	1028998	235/70R16	XL 109T	BSW	6.0-8.0	50	2,271	28.9	9.4	12.5	719	32.1	32.4	3PMSF
	1026845	1026844	245/70R16	SL 107T	BSW	6.5-8.0	51	2,149	29.5	9.6	12.5	704	33.6	34.0	3PMSF
	1028497	1029890	245/75R16	SL 111T	BSW	6.5-8.0	51	2,403	30.4	9.6	12.5	683	35.0	35.6	3PMSF
	1028498	1029891	255/70R16	SL 111T	BSW	6.5-8.5	51	2,403	30.0	10.1	12.5	692	35.8	36.1	3PMSF
	1028928	1028996	265/70R16	SL 112T	BSW	7.0-9.0	51	2,469	30.6	10.9	12.5	679	37.2	37.8	3PMSF
	1028499	1029892	265/75R16	SL 116T	BSW	7.0-9.0	51	2,756	31.6	10.3	12.5	658	39.6	39.9	3PMSF
	1028955	1029023	215/60R17	XL 100T	BSW	6.0-7.5	50	1,764	27.1	9.1	12.5	766	27.6	28.2	3PMSF
17	1026038	1026773	215/65R17	XL 103T	BSW	6.0-7.5	50	1,929	28.0	8.8	12.5	742	29.5	29.8	3PMSF
	1028920	1028988	225/60R17	XL 103T	BSW	6.0-8.0	50	1,929	27.6	9.4	12.5	754	29.4	29.7	3PMSF
	1026843	1026842	225/65R17	SL 102T	BSW	6.0-8.0	51	1,874	28.4	9.3	12.5	731	30.3	30.6	3PMSF
	1028957	1029025	235/60R17	XL 106T	BSW	6.5-8.5	50	2,094	28.1	9.9	12.5	740	31.4	32.0	3PMSF
	1028922	1028990	235/65R17	XL 108T	BSW	6.5-8.5	50	2,205	29.0	9.4	12.5	717	32.4	34.0	3PMSF
	1026053	1026774	245/65R17	XL 111T	BSW	7.0-8.5	50	2,403	29.5	9.8	12.5	704	33.5	33.8	3PMSF
	1028933	1029001	245/70R17	SL 110T	BSW	6.5-8.0	51	2,337	30.5	9.6	12.5	681	35.2	35.6	3PMSF
	1028937	1029005	255/65R17	SL 110T	BSW	7.0-9.0	51	2,337	30.0	10.5	12.5	692	36.1	36.5	3PMSF
	1028939	1029007	265/65R17	SL 112T	BSW	7.5-9.5	51	2,469	30.5	10.7	12.5	681	37.4	37.8	3PMSF
	1028916	1028984	265/70R17	SL 115T	BSW	7.0-9.0	51	2,679	31.6	10.6	12.5	658	39.0	39.3	3PMSF
	1026046	1026776	225/55R18	XL 102T	BSW	6.0-8.0	50	1,874	27.8	9.2	12.5	748	29.9	30.2	3PMSF
	1028932	1029000	225/60R18	XL 104T	BSW	6.0-8.0	50	1,984	28.5	9.4	12.5	729	30.4	30.8	3PMSF
18	1026043	1026778	235/55R18	XL 104T	BSW	6.5-8.5	50	1,984	28.0	9.6	12.5	741	31.4	31.8	3PMSF
	1026849	1026848	235/60R18	XL 107T	BSW	6.5-8.5	50	2,149	29.1	9.9	12.5	715	33.0	33.3	3PMSF
	1026057	1026779	235/65R18	XL 110T	BSW	6.5-8.5	50	2,337	30.0	9.6	12.5	693	34.4	34.7	3PMSF
	1028918	1028986	245/60R18	SL 105T	BSW	7.0-8.5	51	2,039	29.5	10.2	12.5	703	32.3	32.9	3PMSF
	1026042	1026781	255/55R18	XL 109T	BSW	7.0-9.0	50	2,271	29.0	10.4	12.5	716	35.3	35.6	3PMSF
	1028923	1028991	255/65R18	SL 111T	BSW	7.0-9.0	51	2,403	31.0	10.5	12.5	670	37.5	37.8	3PMSF
	1028931	1028999	255/70R18	SL 113T	BSW	6.5-8.5	51	2,535	32.0	10.1	12.5	648	38.1	38.5	3PMSF
	1026039	1026783	265/60R18	XL 114T	BSW	7.5-9.5	50	2,601	30.5	11.0	12.5	681	37.6	37.9	3PMSF
	1028919	1028987	265/65R18	SL 114T	BSW	7.5-9.5	51	2,601	31.5	10.7	12.5	660	38.3	38.7	3PMSF
	1028924	1028992	265/70R18	SL 116T	BSW	7.0-9.0	51	2,756	32.6	10.6	12.5	637	39.8	40.2	3PMSF
	1028917	1028985	275/65R18	SL 116T	BSW	7.5-9.5	51	2,756	32.0	11.1	12.5	648	40.7	41.6	3PMSF
	1032481	1032484	225/55R19	XL 103T	BSW	6.0-8.0	50	2,535	28.7	9.6	12.5	725	30.1	30.5	3PMSF
19	1028942	1029010	255/60R19	SL 109T	BSW	7.0-9.0	51	2,271	31.0	10.6	12.5	670	36.7	37.0	3PMSF
	1032482	1032483	255/50R20	XL 109T	BSW	7.0-9.0	50	2,271	30.0	10.9	12.5	693	35.4	35.7	3PMSF
20	1026047	1026787	265/50R20	XL 111T	BSW	7.5-9.5	50	2,403	30.4	11.3	12.5	684	37.4	37.7	3PMSF
	1026050	1026789	275/55R20	XL 117T	BSW	7.5-9.5	50	2,833	31.8	11.3	12.5	653	41.1	41.4	3PMSF
	1028921	1028989	275/60R20	XL 116T	BSW	7.5-9.5	50	2,756	32.9	11.1	12.5	631	42.3	42.6	3PMSF

Technical data subject to change without prior notice.

Overall Diameter, Section Width, Tread Depth in inches. Weight in lbs.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

Mileage, Road Hazard, and 30 Day Free Trial warranties apply only to replacement tires. Original Equipment tires are excluded.

Tech : Hankook Innovative Technology HRS : Hankook HRS System SOA : Sound Absorber SEG : Sealguard EV : Electric Vehicle

Available Sizes

Winter i*cept IZ³ | W636 **Studless**

Studless Winter

Inch	S-Code	Size	LI/SS	Sidewall	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Depth	Revs/ Mile	Weight	Tech	
						psi	lbs							
15	1032725	185/60R15	SL	84T	BSW	5.0-6.5	51	1,235	23.8	7.4	10.5	849	16.7	3PMSF
	1032731	185/65R15	SL	88T	BSW	5.0-6.5	51	1,235	24.4	7.4	10.5	827	17.4	3PMSF
	1032732	195/60R15	SL	88T	BSW	5.5-7.0	51	1,235	24.2	7.8	10.5	835	18.0	3PMSF
	1032739	195/65R15	SL	91T	BSW	5.5-7.0	51	1,356	25.0	7.9	10.5	808	19.3	3PMSF
	1032473	205/65R15	SL	94T	BSW	5.5-7.5	51	1,477	25.4	8.2	10.5	793	20.1	3PMSF
16	1032735	195/55R16	SL	87H	BSW	5.5-7.0	51	1,202	24.4	7.7	10.5	826	17.6	3PMSF
	1030540	205/55R16	XL	94H	BSW	5.5-7.5	50	1,477	24.9	8.4	10.5	809	19.9	3PMSF
	1032730	205/60R16	SL	92T	BSW	5.5-7.5	51	1,389	25.6	8.1	10.5	787	20.9	3PMSF
	1032738	205/65R16	SL	95T	BSW	5.5-7.5	51	1,521	26.5	8.1	10.5	760	22.2	3PMSF
	1032508	215/55R16	SL	93H	BSW	6.0-7.5	51	1,433	25.3	8.8	10.5	798	20.8	3PMSF
	1032728	215/60R16	SL	95H	BSW	6.0-7.5	51	1,521	26.1	8.5	10.5	774	23.0	3PMSF
	1032737	215/65R16	SL	98T	BSW	6.0-7.5	51	1,653	26.9	8.5	10.5	750	23.9	3PMSF
	1032491	225/60R16	SL	98T	BSW	6.0-8.0	51	1,653	26.5	8.8	10.5	760	23.6	3PMSF
17	1035559	195/60R17	SL	90H	BSW	5.5-7.0	51	1,323	26.1	8.3	10.5	796	19.9	3PMSF
	1032511	205/50R17	XL	93H	BSW	5.5-7.5	50	1,433	25.0	8.3	10.5	805	19.9	3PMSF
	1032734	215/50R17	SL	91H	BSW	6.0-7.5	51	1,356	25.6	8.6	10.5	789	22.2	3PMSF
	1032729	215/55R17	SL	94H	BSW	6.0-7.5	51	1,477	26.4	8.7	10.5	765	22.6	3PMSF
	1032726	215/60R17	SL	96T	BSW	6.0-7.5	51	1,565	27.1	8.6	10.5	743	24.4	3PMSF
	1030912	225/45R17	XL	94H	BSW	7.0-8.5	50	1,477	25.2	8.8	10.5	799	21.4	3PMSF
	1032727	225/50R17	SL	94H	BSW	6.0-8.0	51	1,477	25.8	9.0	10.5	780	22.8	3PMSF
	1032497	225/55R17	XL	101H	BSW	6.0-8.0	50	1,819	26.6	9.2	10.5	758	24.0	3PMSF
	1032486	235/45R17	SL	94H	BSW	7.5-9.0	51	1,477	25.4	9.2	10.5	795	22.3	3PMSF
	1032733	235/55R17	SL	99H	BSW	6.5-8.5	51	1,609	27.1	9.4	10.5	743	25.9	3PMSF
18	1032510	225/45R18	XL	95H	BSW	7.0-8.5	50	1,521	26.0	8.4	10.5	775	22.0	3PMSF
	1032472	235/45R18	XL	98H	BSW	7.5-9.0	50	1,653	26.5	9.1	10.5	760	23.4	3PMSF
	1032487	235/50R18	SL	97H	BSW	6.5-8.5	51	1,609	27.4	9.3	10.5	737	25.4	3PMSF

Winter i*cept IZ³ x | W636A

Studless

16	1032441	235/60R16	SL	100T	BSW	6.5-8.5	51	1,764	27.1	9.4	10.5	744	26.8	3PMSF
	1032876	235/65R16	SL	103T	BSW	6.5-8.5	51	1,929	28.0	9.4	10.5	720	27.6	3PMSF
17	1032989	215/65R17	SL	99T	BSW	6.0-7.5	51	1,709	28.0	8.6	10.5	719	25.9	3PMSF
	1032442	225/60R17	XL	103T	BSW	6.0-8.0	50	1,929	27.7	8.9	10.5	729	27.2	3PMSF
	1032443	225/65R17	XL	106T	BSW	6.0-8.0	50	2,094	28.5	8.8	10.5	707	28.2	3PMSF
	1032444	235/60R17	SL	102T	BSW	6.5-8.5	51	1,874	28.1	9.3	10.5	716	28.1	3PMSF
	1032445	235/65R17	SL	104T	BSW	6.5-8.5	51	1,984	29.0	9.4	10.5	695	29.2	3PMSF
	1032446	245/65R17	SL	107T	BSW	7.0-8.5	51	2,149	29.5	9.6	10.5	684	30.4	3PMSF
	1032788	245/70R17	SL	110T	BSW	6.5-8.0	51	2,337	30.5	9.9	10.5	661	31.3	3PMSF
	1032789	265/70R17	SL	115T	BSW	7.0-9.0	51	2,679	31.6	10.8	10.5	639	35.7	3PMSF
	1032447	215/55R18	XL	99T	BSW	6.0-7.5	50	1,709	27.4	8.7	10.5	736	24.6	3PMSF
18	1032448	225/55R18	XL	102H	BSW	6.0-8.0	50	1,874	27.8	8.9	10.5	724	26.9	3PMSF
	1032449	225/60R18	SL	100H	BSW	6.0-8.0	51	1,764	28.7	8.9	10.5	703	28.2	3PMSF
	1032450	235/55R18	XL	104T	BSW	6.5-8.5	50	1,874	28.3	9.4	10.5	712	28.0	3PMSF
	1032451	235/60R18	XL	107T	BSW	6.5-8.5	50	2,149	29.2	9.4	10.5	692	29.8	3PMSF
	1032452	235/65R18	XL	110T	BSW	6.5-8.5	50	2,337	30.0	9.4	10.5	672	31.2	3PMSF
	1032453	245/60R18	SL	105T	BSW	7.0-8.5	51	2,039	29.6	9.6	10.5	681	30.8	3PMSF
	1032790	255/65R18	SL	111T	BSW	7.0-9.0	51	2,403	31.1	10.2	10.5	649	33.4	3PMSF
	1032791	255/70R18	SL	113T	BSW	6.5-8.5	51	2,535	32.0	10.3	10.5	630	35.0	3PMSF
	1032792	265/65R18	SL	114T	BSW	7.5-9.5	51	2,601	31.6	10.6	10.5	639	35.5	3PMSF
	1032454	275/65R18	SL	116T	BSW	7.5-9.5	51	2,756	32.0	10.9	10.5	630	38.1	3PMSF
19	1032455	225/55R19	XL	103T	BSW	6.0-8.0	50	1,929	29.0	8.8	10.5	696	27.9	3PMSF
	1032457	235/55R19	XL	105H	BSW	6.5-8.5	50	2,039	29.3	9.4	10.5	688	29.4	3PMSF
	1032461	255/55R19	XL	111T	BSW	7.0-9.0	50	2,403	30.2	10.2	10.5	667	33.5	3PMSF
20	1032465	255/50R20	XL	109T	BSW	7.0-9.0	50	2,271	29.9	10.2	10.5	674	32.5	3PMSF
	1032793	275/60R20	SL	115T	BSW	7.5-9.5	51	2,679	33.1	10.8	10.5	610	38.9	3PMSF

Technical data subject to change without prior notice.

Overall Diameter, Section Width, Tread Depth in inches. Weight in lbs.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

Mileage, Road Hazard, and 30 Day Free Trial warranties apply only to replacement tires. Original Equipment tires are excluded.

Tech : Hankook Innovative Technology HRS : Hankook HRS System SOA : Sound Absorber SEG : Sealguard EV : Electric Vehicle

i*Pike RW11 | RW11

Studdable & Studded Winter

S-Code			Max. Load										Weight			
Inch	Non-Stud	Factory Stud	Size	LI/SS	Sidewall	Rim Width Range	psi	lbs	Overall Diameter	Section Width	Tread Depth	Revs/ Mile	Non-Stud	Factory Stud	Tech	
15	2021546	2021566	LT235/75R15	C	104/101Q	BSW	6.0-8.0	50	1,985	28.8	9.1	16.0	726	37.4	37.9	3PMSF
	2021545	2021565	LT215/85R16	E	115/112Q	BSW	5.5-7.0	80	2,680	30.3	8.4	16.0	691	41.5	42.0	3PMSF
	2021538	2021558	LT225/75R16	E	115/112Q	BSW	6.0-7.5	80	2,680	29.2	8.5	16.0	715	42.2	41.5	3PMSF
	2021543	2021563	LT235/85R16	E	120/116Q	BSW	6.0-7.5	80	3,042	31.6	8.6	16.0	661	45.6	45.9	3PMSF
	2021537	2021557	LT245/75R16	E	120/116Q	BSW	6.5-8.0	80	3,042	30.3	9.5	16.0	689	46.1	45.3	3PMSF
	2021540	2021560	LT265/75R16	E	123/120Q	BSW	7.0-9.0	80	3,415	31.6	10.2	16.0	661	48.7	49.6	3PMSF
17	2021542	2021562	LT235/80R17	E	120/117Q	BSW	6.0-8.0	80	3,085	31.7	8.8	16.0	659	47.1	47.6	3PMSF
	2021544	2021564	LT245/70R17	E	119/116Q	BSW	6.5-8.0	80	3,000	30.5	9.4	16.0	686	45.5	46.0	3PMSF
	2021541	2021561	LT245/75R17	E	121/118Q	BSW	6.5-8.0	80	3,195	31.4	9.6	16.0	665	48.1	49.0	3PMSF
	2021536	2021556	LT265/70R17	E	121/118Q	BSW	7.0-9.0	80	3,195	31.6	10.6	16.0	661	50.6	51.1	3PMSF
18	2021295	-	LT265/70R18	E	124/121R	BSW	7.0-9.0	80	3,525	32.6	10.6	16.0	641	54.3	-	3PMSF
	2021294	-	LT275/65R18	E	123/120R	BSW	8.0-9.5	80	3,415	32.0	11.0	16.0	653	61.1	-	3PMSF
	2021293	-	LT275/70R18	E	125/122R	BSW	7.0-9.0	80	3,640	33.1	10.8	16.0	631	63.3	-	3PMSF
20	2001690	-	LT275/65R20	E	126/123Q	BSW	8.0-9.5	80	3,750	34.0	10.9	16.0	614	67.7	-	3PMSF

Technical data subject to change without prior notice.

Overall Diameter, Section Width, Tread Depth in inches. Weight in lbs.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

Mileage, Road Hazard, and 30 Day Free Trial warranties apply only to replacement tires. Original Equipment tires are excluded.

Tech : Hankook Innovative Technology HRS : Hankook HRS System SOA : Sound Absorber SEG : Sealguard EV : Electric Vehicle

About Hankook

Dynapro

iON

Ventus

Kinergy

WeatherFlex

Winter

Vantra





VANTRA

Commercial

Vantra Transit (RA58C)

Vantra Trailer (ST01)

About Hankook

Dynapro

ION

Ventus

Kinergy

WeatherFlex

Winter

Vantra

VANTRa *Transit* (RA58C)

*Exceptionally durable all-season tire with improved mileage
for commercial vans and transporters*



Extended tread life


Hankook developed the VANTRA TRANSIT with higher mileage tire. It saves money on tire changes and helps you stay longer on the road. This model improved up to 30% more mileage than its predecessor.

Tread life



Optimised pattern design & construction

Mileage performance has been improved by creating a square footshape with a wider tread width and an optimized pattern design for each ratio. Also, The optimized structure increases tire efficiency and reduces rolling resistance.



Improved fuel efficiency


The VANTRA TRANSIT is developed with fuel efficiency in mind to ensure user efficiency and economy. A new compound was applied to increase fuel efficiency while also considering wet performance and mileage performance.

Low rolling resistance



Advanced compound for fuel efficiency

By applying super abrasion reinforcing filler with optimized mixing technology, the advanced compound minimizes rolling resistance for better fuel economy while delivering outstanding tread life.

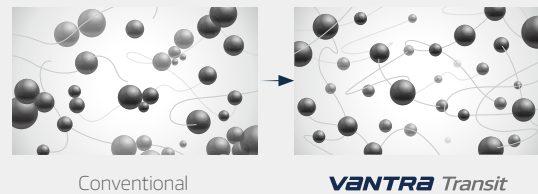


Enhanced safety

Hankook created the VANTRA TRANSIT considering the safety of users who stay on the road for a long time. In order to safely transport with high loads for a long time, the optimal compound and advanced construction were applied to maximize driving performance.

3d gripcontrol sipes

The 3D GripControl Sipes are placed on the tread to keep the tire in an optimized shape. Vantra Transit has the full depth 3D Sipes, and helps to provide outstanding grip and handling performance to last.



Wet grip

Improved by **6%**



Dry handling

Improved by **8%**



VANTRA Trailer (ST01)


Hankook's first special trailer tire

Exceptional durability and stability




Belt edge tape

Stronger bonding between the belts ensures driving stability at high speeds, and the durable structure is designed to sustain vehicle loads.

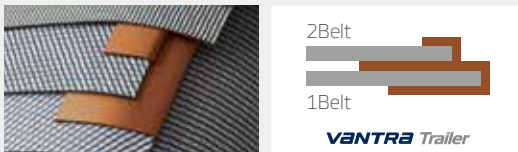


Maintain stable tire shape

Optimized rubber matrix & tire structure help to maintain the stable shape of the tire for a long time.

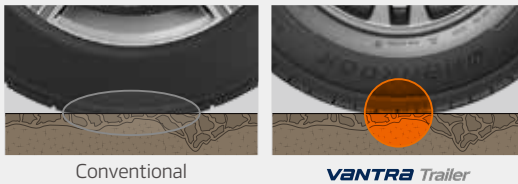


Flat spot (Tire deformation) test result

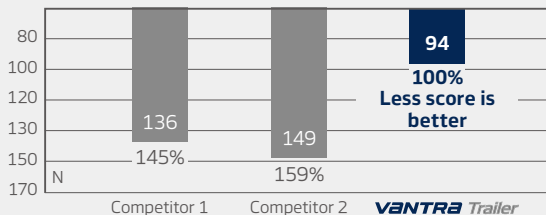

* Tire size : ST205/75R15

Aging durability

Optimized curing temperature helps improve aging durability performance.

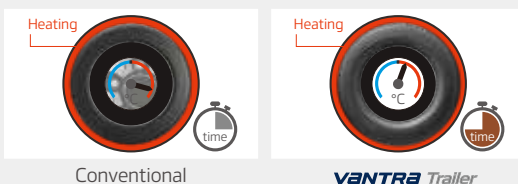

High stiffness pattern block



Z-shape deep snow grooves on the tread provide maximized grip performance on the deep snow.

Decoupling groove



Optimized decoupling groove prevent heat generation in the shoulder part due to heavy loads.


Groove stiffness



Each groove design with high stiffness for heavy loads.

High structure and small particle size carbon

Super abrasion structure carbon black provides low rolling resistance, delivering high mileage to drivers.

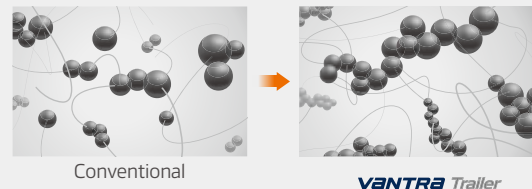

Available Sizes

Vantra Trailer | ST01

Special Trailer

Inch	S-Code	Size		LI/SS	Sidewall	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Depth	Revs/ Mile	Weight
							psi	lbs					
13	2021432	ST175/80R13	C	91/87N	BSW	4.5-6.0	50	1,360 / 1,200	23.9	7.0	8.0	875	21.1
	2021433	ST185/80R13	C	94/89N	BSW	4.5-6.0	50	1,480 / 1,280	24.5	7.2	8.0	853	22.4
14	2021434	ST205/75R14	D	105/101N	BSW	5.0-7.0	65	2,040 / 1,820	26.0	7.9	8.0	804	28.0
	2021435	ST215/75R14	D	108/103N	BSW	5.5-7.0	65	2,200 / 1,930	26.6	8.4	8.0	787	29.8
15	2021436	ST205/75R15	D	107/102N	BSW	5.0-7.0	65	2,150 / 1,870	27.0	7.9	8.0	774	29.6
	2021437	ST225/75R15	E	117/112N	BSW	6.0-7.5	80	2,830 / 2,470	28.2	8.7	8.0	742	34.3
16	2021438	ST235/80R16	E	123/119N	BSW	6.0-8.0	80	3,420 / 3,000	30.7	9.1	8.0	682	44.2
	2021439	ST235/85R16	E	125/121N	BSW	6.0-7.5	80	3,640 / 3,200	31.6	9.0	8.0	662	45.7
	2021440	ST255/85R16	E	129/125N	BSW	6.5-8.0	80	4,080 / 3,640	32.9	9.6	8.0	635	54.5

Vantra Trailer TH31 | TH31

16	3003761	ST225/90R16	G	129/125M	BSW	6.0-7.0	110	4,080 / 3,640	31.8	8.6	12.0	660	59.0
	3003760	ST235/80R16	G	129/125M	BSW	6.0-8.0	110	4,080 / 3,640	30.8	9.2	12.0	681	60.6
	3003734	ST235/85R16	G	132/127M	BSW	6.0-7.5	110	4,400 / 3,860	31.6	9.3	12.0	664	61.6

Technical data subject to change without prior notice.

Overall Diameter, Section Width, Tread Depth in inches. Weight in lbs.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

Mileage, Road Hazard, and 30 Day Free Trial warranties apply only to replacement tires. Original Equipment tires are excluded.

Inch	S-Code	Size		LI/SS	Sidewall	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Depth	Revs/ Mile	Weight
							psi	lbs					
14	2022276	185R14C	D	102/100R	BSW	5.0-6.0	65	1,875/1,764	25.5	7.3	11.5	820	24.1
	2022277	195R14C	D	106/104R	BSW	5.0-6.0	65	2,094/1,984	26.1	7.7	11.5	801	25.6
16	2022294	195/75R16C	D	107/105R	BSW	5.0-6.0	69	2,150/2,040	27.4	7.7	11.5	762	28.8

Technical data subject to change without prior notice.

Overall Diameter, Section Width, Tread Depth in inches. Weight in lbs.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

Mileage, Road Hazard, and 30 Day Free Trial warranties apply only to replacement tires. Original Equipment tires are excluded.



 HankookTireUSA  @HankookTireUSA  @HankookTireUSA  hankook-tire-america-corp.  @HankookTireUSA

Hankook Tire America Headquarters
333 Commerce Street, Suite 600 Nashville, Tennessee 37201, USA T +1 615 432 0700
www.hankooktire.com